

# ENTTEC

## RDS8 / RDS4

RDM DMX isolated splitters



Distributor:



Phone: 407-857-8770

Fax: 407-857-8771

Email: [sales@techni-lux.com](mailto:sales@techni-lux.com)

[www.techni-lux.com](http://www.techni-lux.com)

DISCLAIMER This brochure is for general marketing purposes only and should not be relied upon as being complete or accurate.

[www.enttec.com](http://www.enttec.com)

Controls . Lights . Solutions

ENTTEC PTY LTD  
Head office : 7 Macro Court  
Rowville VIC 3178 Australia  
Tel : +61 3 9763 5755  
Fax : +61 3 9763 5688  
[sales@enttec.com](mailto:sales@enttec.com)

ENTTEC EUROPE  
F22-26 Parkhall Business Centre  
40 Martell Road  
London SE21 8EN, UK  
Tel : +44(0) 2070616210  
[sales@enttec.co.uk](mailto:sales@enttec.co.uk)

ENTTEC AMERICAS  
604A Cornerstone Ct.  
Hillsborough NC27278 USA  
Tel & Fax : (888) 454-5922  
[sales.americas@enttec.com](mailto:sales.americas@enttec.com)

## RDS8 & RDS4

### Perfect distribution !

The **RDS8** is a DMX/RDM compatible, 8-port, fully isolated splitter. Like the RDS4, it allows users to build a network compliant with the DMX/RDM (E1.20-2006) standard. Current DMX splitters will not allow RDM enabled devices to function properly, the RDS8 now solves this problem while allowing your RDM devices to talk back to a controller.

The **RDS4** is a splitter and isolator of DMX signals that incorporates features needed when Remote Device Management (RDM) signals are traveling through the network.

#### ► Features

- **RDS8** has 1 DMX input and 8 DMX outputs
- **RDS4** has 1 DMX input and 4 DMX outputs
- **Normal mode** : splitter actively repeats RDM traffic bi-directionally while level information goes from controller to DMX devices as usual
- **Filter mode** : single button-press allows all RDM traffic to be filtered out, for use with legacy devices which might flicker if they encounter the nonzero start codes of RDM message packets
- **Backup mode** : another button bypasses intelligent RDM functionality completely to work as a traditional DMX splitter would
- Fully compliant with ESTA and USITT standards for DMX512A with RDM and RDM Standard ANSI E1.20 - 2006
- Internal autoranging power supply
- Other UL approved options available



#### DIMENSIONS

- RDS4**  
H 44.5mm / W 300mm / D 115mm  
H 1.75" / W 11.82" / D 4.53"
- RDS8**  
H 44.5mm / W 432mm / D 111mm  
H 1.75" / W 17" / D 4.37"


#### PART NUMBERS

70036 - RDS8

70037 - RDS4

#### ► Applications

- Architectural
- Theatre
- Trade shows
- Touring
- Theme parks

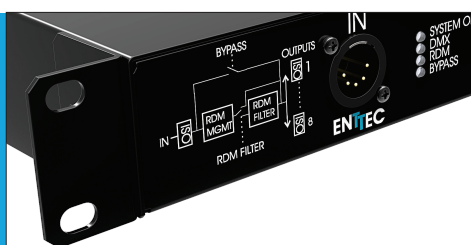

#### ► Functional specifications

- RDS8 and RSD4 support one universe of 512 output addresses
- All ports are isolated up to 1500V
- Input port is 5-pin XLR Male
- Output ports are 5-pin XLR Female
- Break length time : replicates input signal to within 50ms
- Refresh cycle : replicates input signal
- CE, FCC certified