

Single Pole Devices and Temporary Power

Series 16 - 300 and 400A, 600V AC/250V DC

Tri-Tap T Connector

HUBBELL

Ordering Information

Description	Device Color	UPC	Catalog Number
Soft 3-Fer (Male-Female-Female-Female)	Black	783585458960	HBLM3FSBK




Standards

UL 498 and UL1691
UL Enclosure Types 3R, 4X, 12

Specifications

Product Type	Ts" and Tri-Taps
Tee and Tap Type	Tri-Tap
Body Material	Thermoplastic Elastomer
Contact Material	Brass

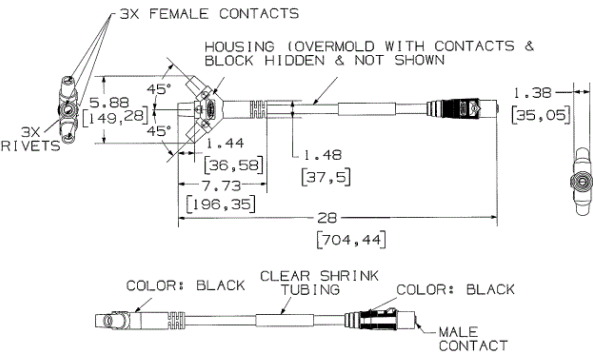

Performance

Electrical	
Amperage Rating	400A Maximum
Voltage Ratings	600V AC Maximum; 250V DC Maximum
Mechanical	
Product Identification	Ratings are a permanent part of the device

Online Resources

Customer Use Drawing
eCatalog
Installation Instructions

Distributor:



Phone: 407-857-8770
Fax: 407-857-8771
Email: sales@techni-lux.com
www.techni-lux.com

