

Non-NEMA Twist-Lock® Devices
 10A, 250V/15A, 125V, 3 Pole, 3 Wire
 Non-Grounding
 Insulgrip® Plug

HUBBELL

Features

- Individually molded face for each blade configuration keeps debris out of plug interior
- Ribbed nylon housing is impact and chemical resistant
- Roomy wiring chamber provides ample space for wiring

Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Black and white nylon	.230"-.720"	783585178752	HBL7567C
Multiple drive screws	(5.8-18.3)		

Listings

Fed.Spec.W-C-596
 Certified to CSA C22.2 No.42

Specifications

Blade/Contact Carrier	Natural (white) nylon
Terminal Retainer	Clear polycarbonate
Housing	Black nylon
Cord Clamp	Natural (white) nylon
Blades/Contacts	Brass
Grounding Screw	Brass (green finish)

Performance

Electrical

Current Interrupting Certified for current interrupting at full rated current
 Dielectric Voltage Withstands 2,000V minimum


Mechanical

Terminal Accommodation #18 AWG - #10 AWG stranded copper wire only.

Terminal Identification Terminals identified in accordance with UL 498

Environmental

Flammability HB or better per UL94/CSA 22.2 No.0.17
 Moisture Resistance IP20 Suitability
 Operating Temperatures Maximum Continuous 75°C; Minimum -40°C (w/o impact)

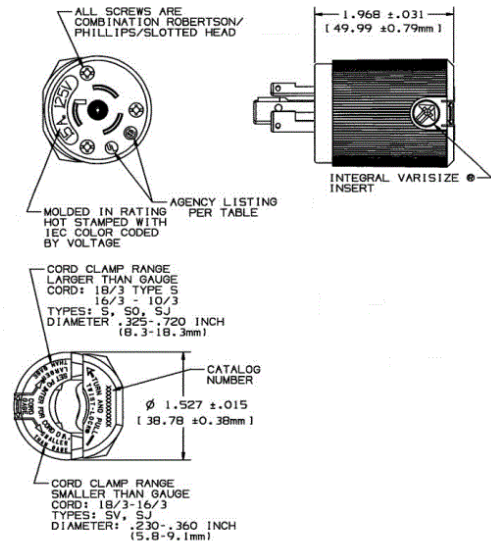

Accessories

Connector	HBL7565C
Duplex Receptacle	HBL7580
Single Receptacle	HBL7582
Stainless Steel Flanged Receptacle	HBL7557

Resources

Customer Use Drawing
 eCatalog

Distributor:


 Techni-Lux
 www.techni-lux.com

Phone: 407-857-8770
 Fax: 407-857-8771
 Email: sales@techni-lux.com



Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.