


Installation Instructions

- ➔ First make sure the **PIVOTC512** console is turned off.
- ➔ Remove the small cover plate panel by unscrewing the two screws. Release the connector from the panel.



- ➔ Insert the connector into the pins in the direction shown. Make sure that the references are on top.

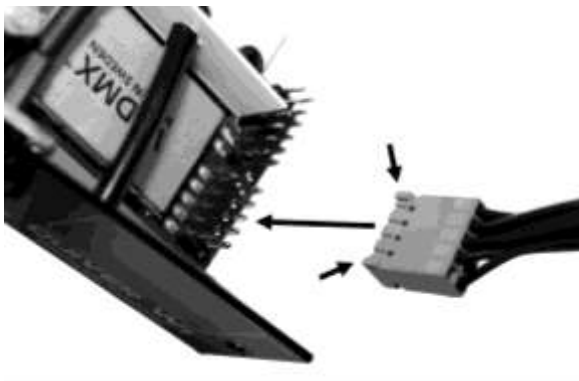

- ➔ Re-assemble the **PIVOTWDMX512** into the **PIVOTC512** console using the same screws. Screw in and rotate the ANTENNA.



- ➔ Turn ON the **PIVOTC512** console and set the DMX universe for the wireless following the instructions on page 53 of console user manual. The user manual file is provided with the console on a USB Key.

Specifications

Frequency Range: ISM band 2.4 GHz
 Number of Channels: 20
 Transmitter Range: 500 meters/1640 feet open air
 Voltage/Current: 3.3 Vdc / 200 mA
 The transmitter is compatible with Wireless Solution W-DMX™ receivers.

