



IP Color Micro bar 54 RGB

Product Code: SG IPLEDMCBAR54RGB

IP 65 architectural led bar 54X3W RGB



Description

Micro bar is a brand new bar belonging to the Sagitter IP65 led series, designed for a full range of applications both within the live entertainment and architectural lighting. Micro bar is the result of the miniaturization of the most common led bars for outdoor, due to the increasingly need to hide lighting fixtures for facades or surfaces. The aluminium die cast alloy of its body makes it extremely robust, light and noise free; it's linear shape and 39 cm body length perfectly fits into any modern or traditional architectural installations. Its linear design and the chromatic technology used in the led source of the RGB version, make it a projector unique on the market. The special optics has been designed to allow the lighting of big surfaces, simulating the linear emission of the most common fluorescent lamps. The external box controller uses a technology that permit to manage the connected bars, as well as several preset options already on board.

Technical Specifications

LIGHT SOURCE

- 54x3W led RGB
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: 60x10°

COLOR SYSTEM

- LED source RGB
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX

CONTROL AND PROGRAMMING

- 5 DMX configurations available: 1/3/4/7/10 channels
- Protocol USITT DMX 512
- Master/Slave mode
- Auto mode with 10 different programs selectable from the display with speed adjustment
- Static color mode with strobe adjustment
- Color mode with 55 pre-programmed color macros

STRUCTURE AND CABINET


- Die cast aluminium housing
- Color LCD display
- Front tempered glass
- "Light up" positioning with adjustable angle
- IP rating: IP65
- Power and DMX IN/OUT connector IP65
- Convection cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Power and DMX IN/OUT connector IP65

WEIGHT AND DIMENSIONS

- Net weight: 1.9 kg/4.2 lbs
- Dimensions: 15.6" x 2.2" x 3.5" (395x55x85 mm)

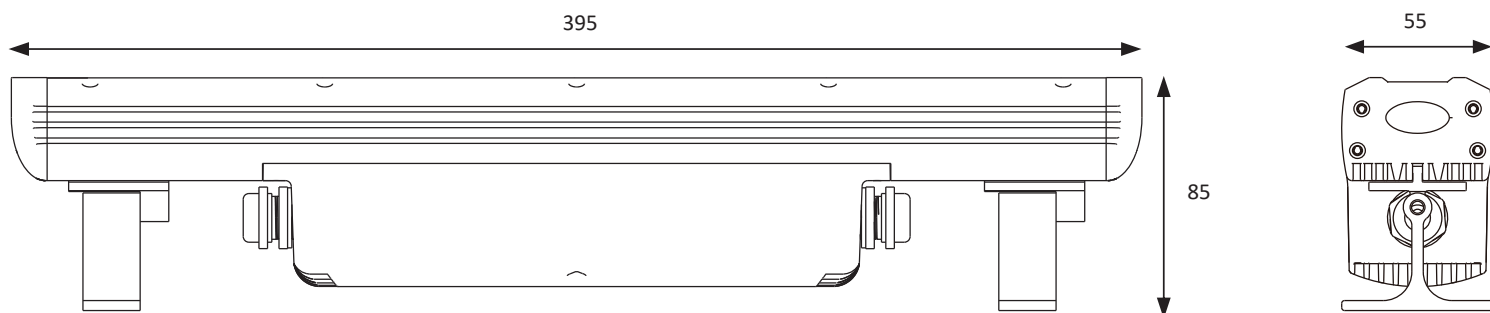

Distributor:



Phone: 407-857-8770
Fax: 407-857-8771
Email: sales@techni-lux.com
www.techni-lux.com

Technical specifications and appearances are subject to change without notice and accuracy is not guaranteed. All trademarks are the property of their respective owners. PROEL accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph or statement contained herein. Colors and specifications may vary from actual product. PROEL products are sold through authorized fullfillers and resellers only. This manual is copyrighter. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of PROEL - Via alla Ruenia 37/43 - CAP 64027 - Sant'Omero (TE) ITALY.

Sagitter is a brand of Proel Spa | Via alla Ruenia 37/43 64027 Sant'Omero (TE) ITALY
Tel. +39 0861 81241 | Fax. +39 0861 887862 | www.sagitter.com

