

## GANTOM ONE: 4W PINSPOT



Compact, powerful, versatile... this is the One. Gantom listened to some of the most skilled lighting professionals in the industry and based on their input designed the One; the pinspot to rule all pinspots. Compared to a traditional 30w pinspot the One runs cooler and safer on far less power, has much cleaner optics, and can even be run on batteries. To top it off the One includes an integrated, easy to use magnetic accessory mounting system. Choose from an almost infinite array of colors and diffusers to achieve any effect you desire, then install the perfect option without tools or hassle. Your old pinspots have had a good run, but now it's time to replace them with the One.

## FEATURES

- ✓ Exceeds output of traditional 30W pinspots while using only 4W
- ✓ Ultra narrow beam optics for optimal long distance throw
- ✓ Magnetic accessory attachment for fillers and diffusers
- ✓ Low voltage and minimal heat for improved safety over incandescent sources
- ✓ Internal constant current driver gives highly efficient and consistent output
- ✓ Dimmable using PWM input (10%-100%)
- ✓ Easy installation and reconfiguration
- ✓ Dual polarity input
- ✓ Minimal maintenance required over 50,000 hour lamp life
- ✓ Indoor and outdoor use

## SPECIFICATIONS









MAX WATTAGE	4.8W
INPUT VOLTAGE	9-15VDC (12VDC nominal)
CURRENT DRAW	400mA @ 12VDC
POWER SUPPLY	Class 2 transformer or battery
BEAM ANGLE	2.7° (diffusable with included filters)
FIELD ANGLE	4.5° (diffusable with included filters)
INGRESS PROTECTION	IP65
LED	Cree XLamp XP-E2
EXTERIOR FINISH	Black anodized aluminum
CERTIFICATION	UL and CE
POWER CONNECTION	2.1mm ID / 5.5mm OD DC jack with screw terminal adapter

## SKU NUMBER

Gantom One - Cool White	GT51
Gantom One - Warm White	GT52

**OUTPUT**

Distance	Center Brightness		Beam Width
	Cool White	Warm White	
1.0m (3.3ft)	22100lx (2053.2fc)	15000lx (1393.5fc)	0.05m (0.2ft)
2.0m (6.6ft)	8100lx (752.5fc)	5500lx (511.0fc)	0.1m (0.3ft)
3.0m (9.8ft)	4100lx (380.9fc)	2700lx (250.8fc)	0.15m (0.5ft)

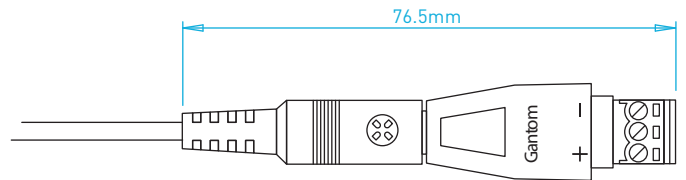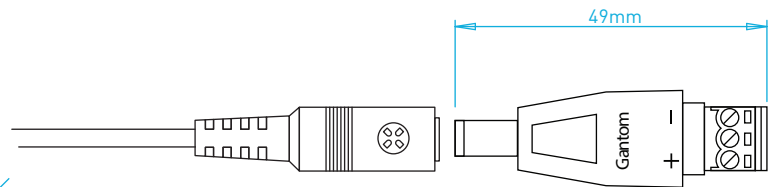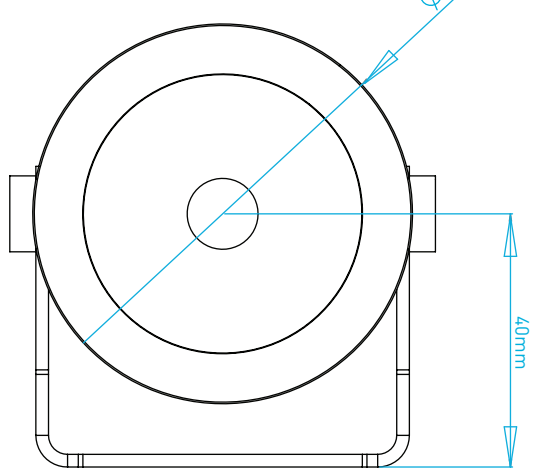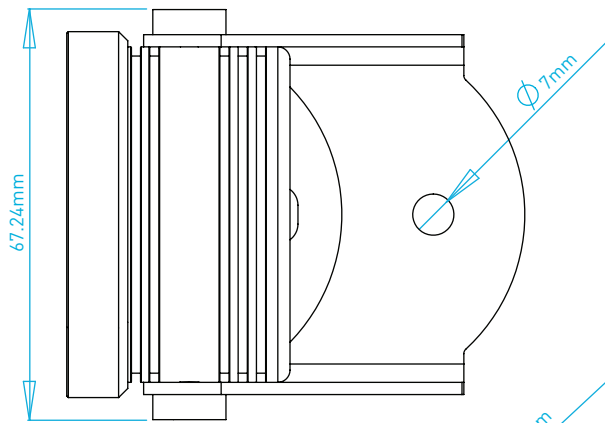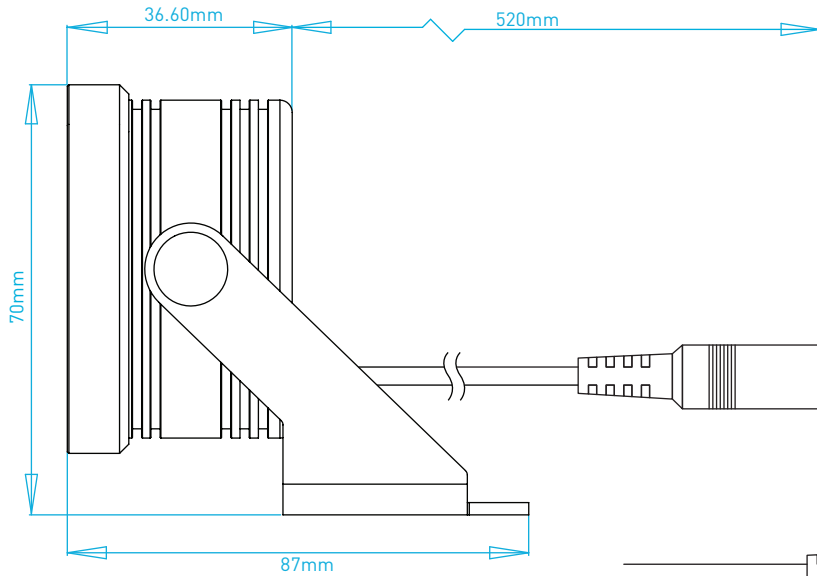

**Distributor:**



Phone: 407-857-8770

Fax: 407-857-8771

www.techni-lux.com