

8PXW60-F-12-B (12 VOLT) PIXEL STRIP

INSTALLATION GUIDE
ID: 5628054

! IMPORTANT: FOLLOW THE INSTRUCTIONS AND RECOMMENDATIONS BELOW, OR YOU MAY EXPERIENCE POOR PRODUCT PERFORMANCE OR EVEN FAILURE. !


MAXIMUM RUN LENGTH

COLOUR AND LUMEN OUTPUT WILL BE AFFECTED IF MAXIMUM LENGTH IS EXCEEDED. TEST CONDUCTED AT MAXIMUM BRIGHTNESS USING 12 VOLT DRIVER.

	LEDS PER METRE	MAXIMUM LENGTH		
		WHITE	RED, GREEN, BLUE	ALL ON
SINGLE POWER INJECTION	60	7m	12.8m	5m
DUAL POWER INJECTION	60	15m	15m	10m

CUTTING

ONLY CUT ALONG THE LINES MARKED ON THE STRIP

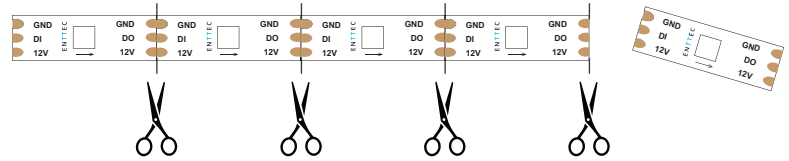

COLOUR CONSISTENCY


TO ACHIEVE OPTIMAL COLOUR CONSISTENCY ACROSS MULTIPLE STRIPS, WE RECOMMEND USING THOSE FROM THE SAME MANUFACTURING BATCH TOGETHER WHEREVER POSSIBLE. PLEASE CHECK YOUR BATCH NUMBERS - THESE CAN BE FOUND ON THE PRODUCT LABEL.

ADHESIVE APPLICATION

- THE STRIP WILL NOT ADHERE TO TEXTURED OR LOW SURFACE ENERGY MATERIALS.
- THE BEST SURFACE FOR LONG LASTING ADHESION IS CLEAN RAW METAL.
- CLEAN SUBSTRATE WITH ALCOHOL AND A CLEAN CLOTH.
- PEEL OFF PROTECTIVE BACKING TO REVEAL ADHESIVE.
- APPLY PRESSURE WHEN ADHESIVE FIXING TO SUBSTRATE.


THERMAL MANAGEMENT

- THESE STRIPS PRODUCE HEAT. THERMAL MANAGEMENT MUST BE CONSIDERED.
- THE MORE LEDES PER METRE, THE MORE HEAT.
- ENTTEC RECOMMENDS USING AN ALUMINIUM PROFILE TO MANAGE HEAT.
- EACH APPLICATION IS DIFFERENT. ENTTEC RECOMMENDS TESTING A SECTION OF STRIP IN ITS FINISHED ENVIRONMENT TO ENSURE THE THERMAL MANAGEMENT IS SATISFACTORY.




WIRING SCHEMATIC


- SELECT THE MOST SUITABLE OPTION FROM BELOW. SOLDER OR CRIMP IS RECOMMENDED TO COMBINE MULTIPLE WIRES.
- IF WIRE COLOURS VARY AND YOU ARE UNSURE, PLEASE CONTACT ENTTEC OR YOUR SUPPLIER FOR FURTHER ADVICE.
- THE MIDDLE WIRE WILL ALWAYS BE DATA.

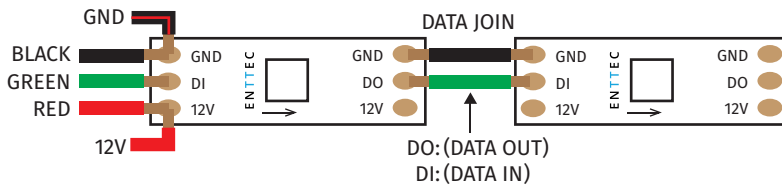


DATA JOIN WITH MULTIPLE SINGLE POWER INJECTIONS

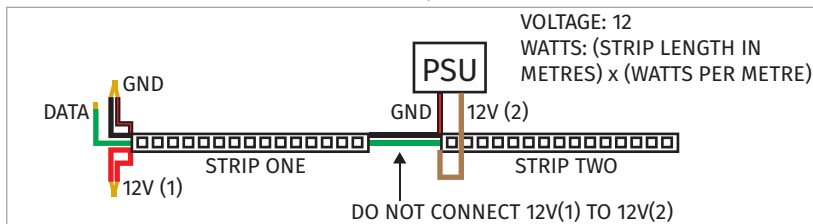

DUAL POWER INJECTION


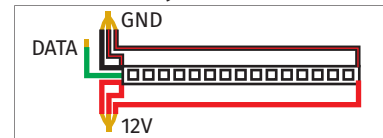


SINGLE POWER INJECTION

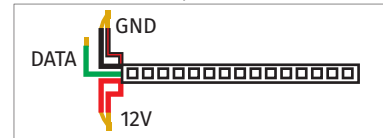

VOLTAGE DROP TESTING

USE MULTIMETER TO TEST FOR VOLTAGE DROP TEST WHERE POWER IS INJECTED. IF PROBLEMS OCCUR ALSO METER THE END OF THE STRIP.

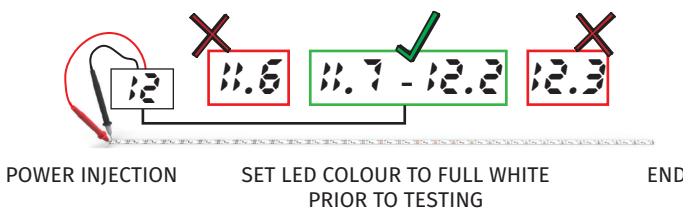

PUSH PROBES THROUGH PROTECTIVE SILICONE TO MAKE CONTACT