

Ultra **LED** SERIES



LEDPanel 36

Product Code

DL-LEDPANEL36W/B
DL-LEDPANEL36W/W
DL-LEDPANEL36UV/B
DL-LEDPANEL36C/B
DL-LEDPANEL36C/W

Product Features and Specifications:

- Power Input: auto-ranging 100-265vAC, 50/60Hz
- Power consumed: 55 watts
- Beam angle: 15° lens standard
- Optional beam angles achievable using LSD filters
- Thermally cooled by heat sink case
- Control: Auto, master/slave and DMX
- On-board LCD display menu with 2 push buttons for settings
- DMX Channels: 3
- Manual standalone settings: 6 static colors choice, internal chases (fading, stepping or flashing) at 9 different speeds
- DMX In/Out: 3-pin XLR connectors
- Rating: IP 65 for outdoor or indoor use
- Heavy duty, light weight die cast aluminum housing
- Mountable base
- Approvals: CE & cULus
- Size: 13.11" w x 8.27" h x 5.79" d
- Weight: 4.3 @s/9.46 @bs

LEDpanel 36 Variable White WWA LED



DL-LEDPANEL36W/B DL-LEDPANEL36W/W Features:
 36 high lumen 1 watt LEDs, 24 each of 6000k white, 12 each of Amber ■ DMX Mode: Ch1 - Cool White Level, Ch2 - Cool White level, Ch3 - Amber level ■ Body color: Black or White

LEDpanel 36 UV LED

DL-LEDPANEL36UV/B Features:
 36 high lumen 1 watt UV LEDs ■ DMX Mode: Ch1 - UV level, Ch2 - UV level, Ch3 - UV level ■ Body color: Black

LEDpanel 36 Color RGB LED

DL-LEDPANEL36C/B DL-LEDPANEL36C/W Features:
 36 high lumen 1 watt LEDs, 12 each of red, green and blue ■ DMX Mode: Ch1 - Red level, Ch2 - Green level, Ch3 - Blue level ■ Body color: Black or White

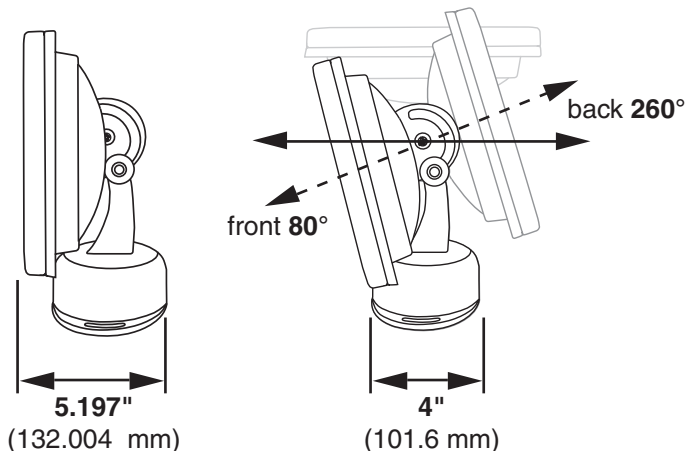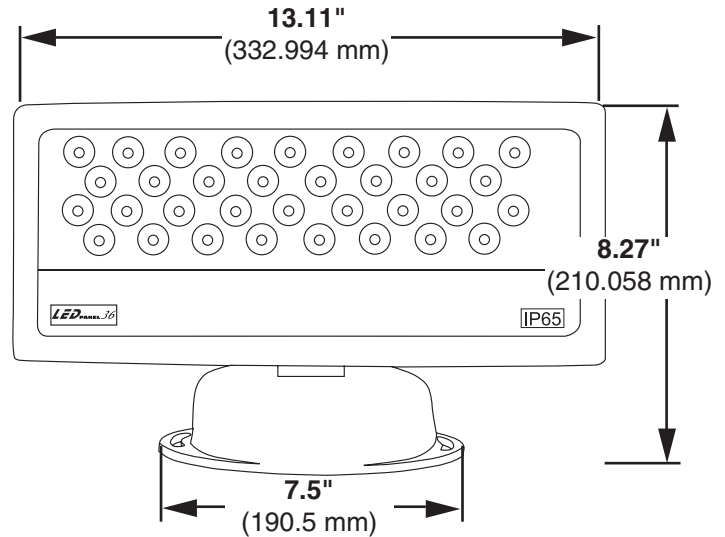

Optional Accessories:

- **CLAMP-OMEGA3**
Omega Clamp for LEDpanel36 with 1/2" clamp holes - natural aluminum finish
- **DL-LEDPANEL36AH/B DL-LEDPANEL36AH/W**
LEDpanel 36 Accessory Holder attaches onto the LED panel36 series externally. It allows the user to put an LSD filter or gel in front of the fixture and preserve its outdoor rating.

10900 Palmbay Drive, Orlando, FL 32824 U.S.A.
 Phone: 407-857-8770 Fax: 407-857-8771
 www.techni-lux.com

