



Manufacturer SGM
Luminaire P-6 All on calibr peak
Measurement Date 02-07-2018
Power Consumption 557 W
Light Output 18 555 lm
Field Angle 21.8 deg
Beam Angle 10.1 deg
Color Temperature 5 630 K




Lux Diagram

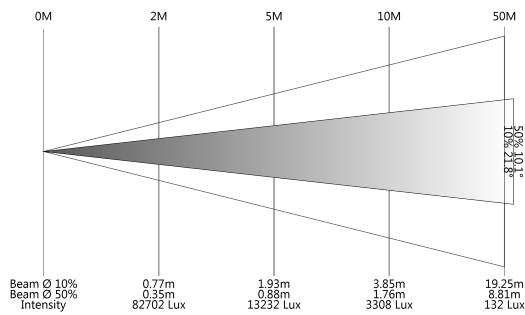


Polar Distribution

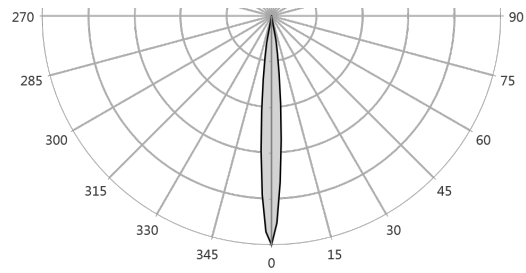

Beam Profile

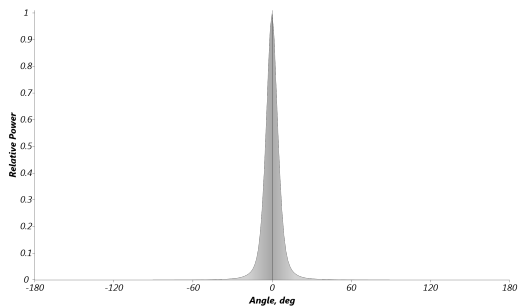


Spectral Distribution

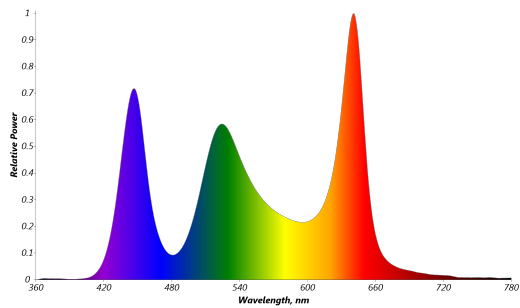


Manufacturer SGM
Luminaire P-6 All on raw Medium filter Gloss side
out peak
Measurement Date 03-07-2018
Power Consumption 602 W
Light Output 15 514 lm
Field Angle 34.8 deg
Beam Angle 18.0 deg


Lux Diagram

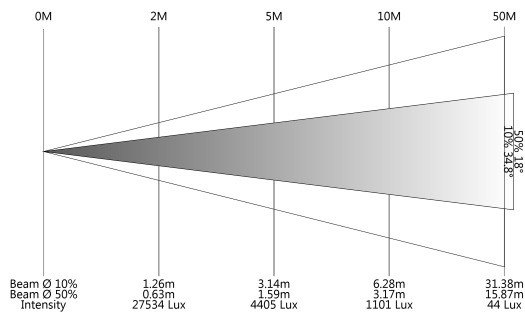


Polar Distribution

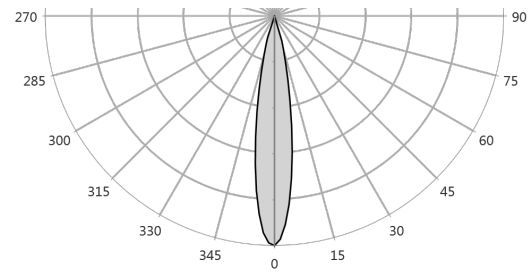

Beam Profile

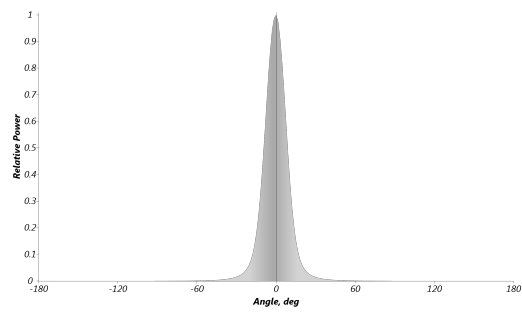


Spectral Distribution

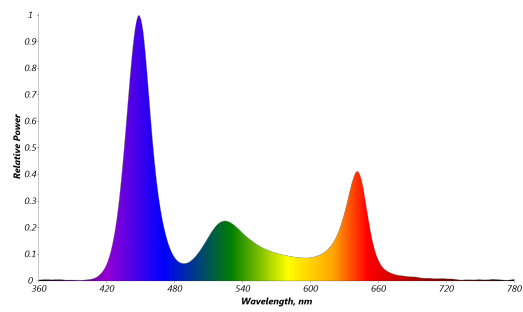


Manufacturer	SGM
Luminaire	P-6 Blue peak
Measurement Date	02-07-2018
Power Consumption	194 W
Light Output	1 462 lm
Field Angle	21.6 deg
Beam Angle	10.3 deg




Lux Diagram

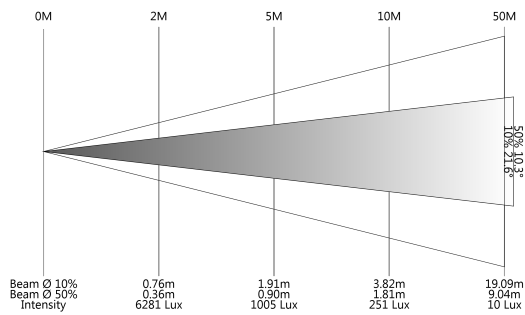


Polar Distribution

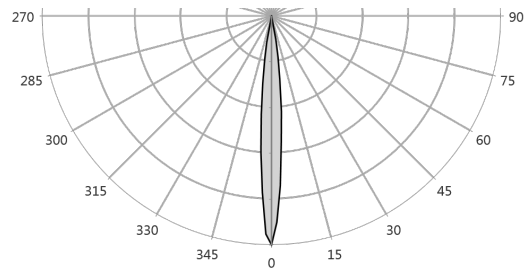

Beam Profile

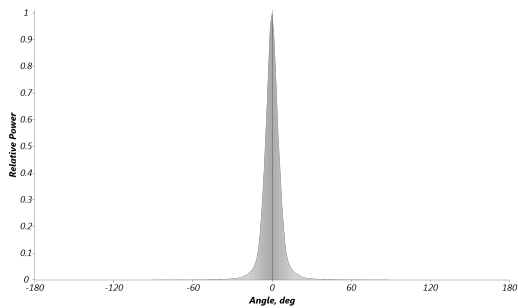


Spectral Distribution

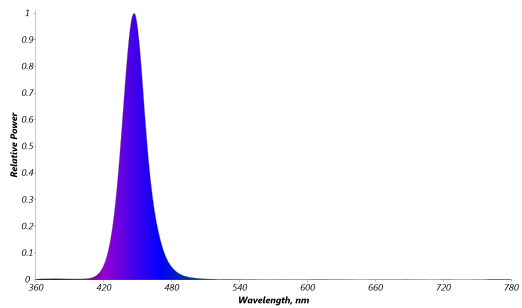


Manufacturer	SGM
Luminaire	P-6 Green peak
Measurement Date	02-07-2018
Power Consumption	223 W
Light Output	6 582 lm
Field Angle	21.5 deg
Beam Angle	10.0 deg




Lux Diagram

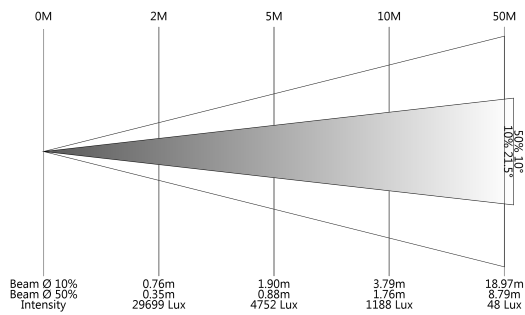


Polar Distribution

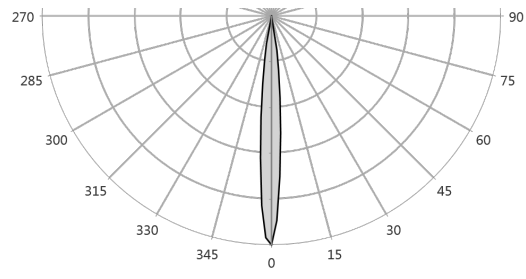

Beam Profile

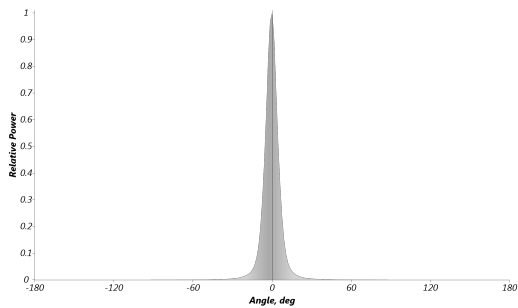


Spectral Distribution

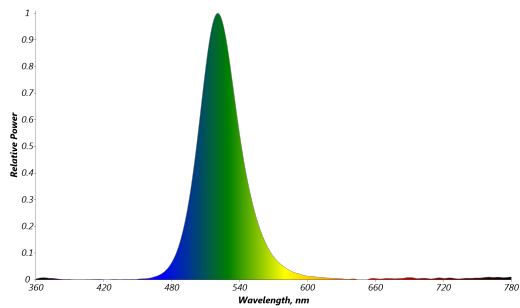


Manufacturer	SGM
Luminaire	P-6 Red peak
Measurement Date	02-07-2018
Power Consumption	163 W
Light Output	3 756 lm
Field Angle	21.3 deg
Beam Angle	10.0 deg




Lux Diagram

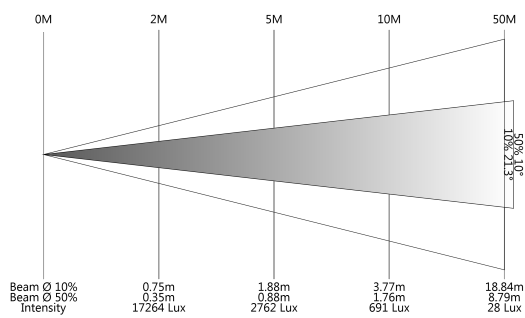


Polar Distribution

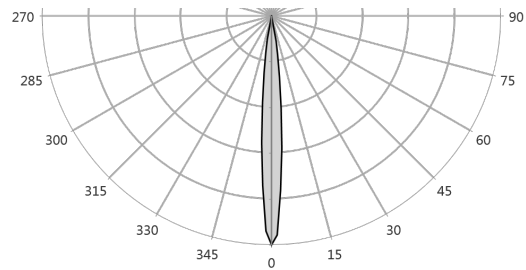

Beam Profile

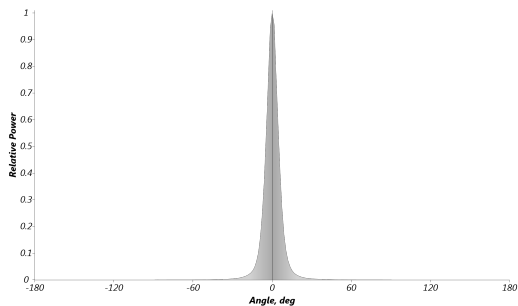

Spectral Distribution

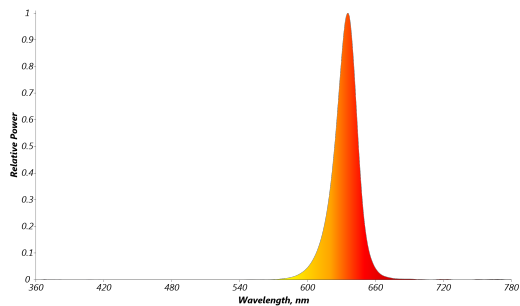

Distributor:



Phone: 407-857-8770

Fax: 407-857-8771

Email: sales@techni-lux.com

www.techni-lux.com