


GOBO SIZES

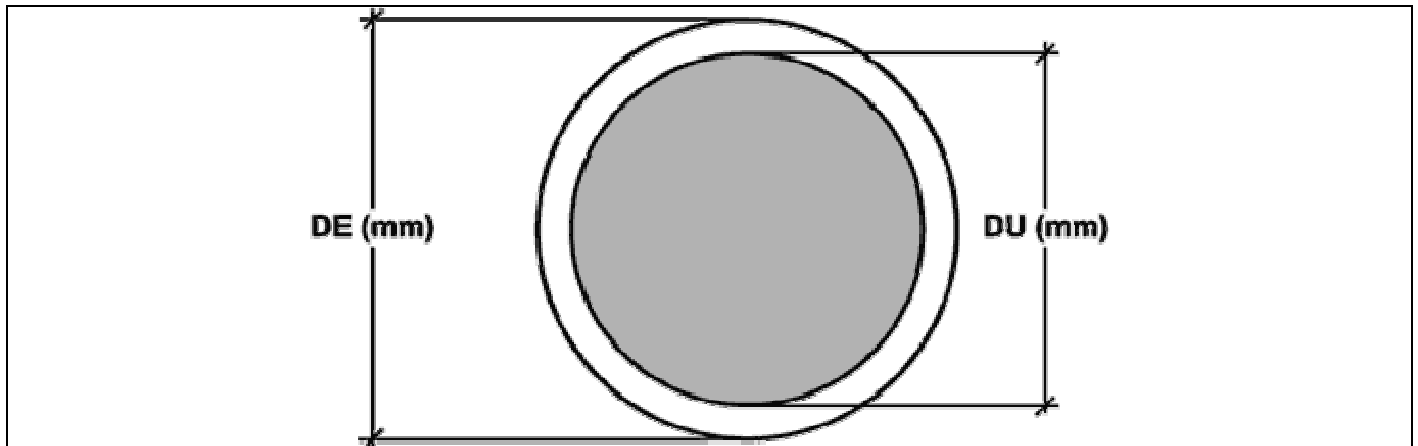

FIXTURE	METAL		TOLERANCE (mm)	DICRHO		Max. thickness Wheel A* (mm)	Max. thickness Wheel B (mm)
	DE (mm)	DU (mm)		DE (mm)	DU (mm)		
COLORLAB	33,9	31	+0/-0,1	-	-	-	-
DISPLAYER	33,9	31	+0/-0,1	-	-	-	-
GALILEO 575	54	45	+0/-0,1	-	-	-	-
GALILEO 1200	54	45	+0/-0,1	-	-	-	-
GALILEO II	49	41	+0/-0,1	**42.9	40	4,4(no rot.)	1,1
GALILEO III	49	41	+0/-0,1	**42.9	40	4,4(no rot.)	1,1
GALILEO IV	49	41	+0/-0,1	**42.9	40	4,4	1,1
GIOTTO SPOT 1200	49	40	+0/-0,1	**42.9	40	4,4	1,1
GIOTTO SPOT 250	30	24	+0/-0,1	***28	24	4,4	1,1/2,7
VICTORY	33,9	31	+0/-0,1	33,9	31	1,1	-
VICTORY II	33,9	31	+0/-0,1	33,9	31	4,4	-
VICTORY II PRO	33,9	31	+0/-0,1	33,9	31	4,4	-

Notes:

DE	outside diameter
DU	max. image diameter
*	wheel nearer the lamp
**	41.8 mm for gobos beyond the 3mm of thickness (to use ring A040115)
***	DE=23 mm DU=21 for gobos beyond the 1.1 mm of thickness max 2.7 mm (to use ring A040138)