

SONICBOOM™ X SMOKEJET SPECIFICATIONS

As a substitute of CO₂ jet, CO₂ jet simulators become more and more popular in the market. Instead of cumbersome CO₂ gas tank, it uses fog fluid as fuel, which is safer, environmental friendly and with longer effects time (more than 12min after fill up). SONICBOOM not only take the advantages of SMOKEJET, but also adopting pipeline integration technology to guarantee the burst time as short as 0.2s. Together with our original fast dissipate fog fluid, makes it the best option in market to substitute of traditional CO₂ jet.

Features

- No need of CO₂ tank, safer and easy carry;
- Easy installation at any angles even place upside down;
- Super long stable effects time, upto 12min after fill up;
- No generation of CO₂, environmental friendly;
- Cost effective consumables;
- Low power mode, lower power supply requirement;
- Excellent heating component, fast temp. recovery;
- Unique constant pressure system, consistent smoke effect;
- Pipeline integration technology, easy maintenance, stronger burst;
- NEUTRIK® POWERCON with quality assurance;
- Multi safety status monitoring design.
- Independent smoke column color change.

Specifications

Dimension

482 x 408 x 215 mm

Weight

17.2 kg

Work Power

3000W/1800W (220V version)

2000W (110V version)

Max Output Height

10m

LED power

5W*35PCS

Max Continuous Output Duration

8s

Smoke Output

55000cuft/min

Tank Capacity

2.5L



DMX Channels


11 / 1 channel optional

CONSUMABLES for SONICBOOM

- FX-S is quick dissipating fog fluid.
- Package: 3L/bottle, 4bottles/carton.
- Fog fluid Consumption: 5min/L.



EFFECTS

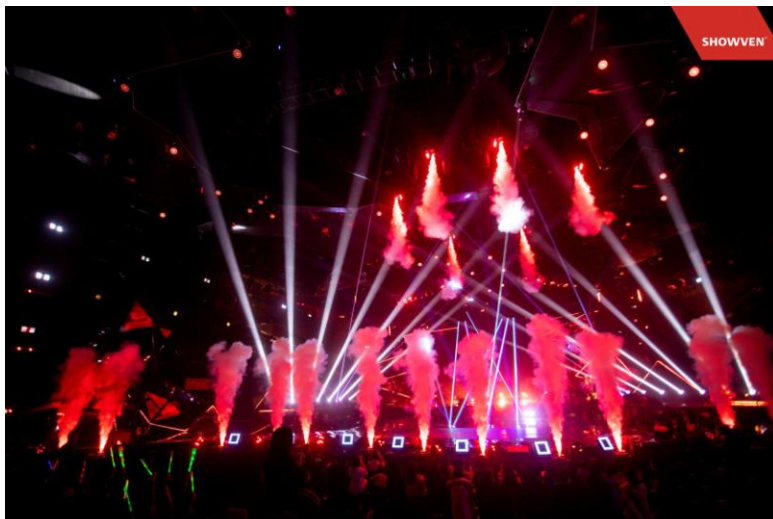

Distributor:



Phone: 407-857-8770

Fax: 407-857-8771

Email: sales@techni-lux.com

www.techni-lux.com