


XDC-6000CL

Digital Cinema Xenon Lamp

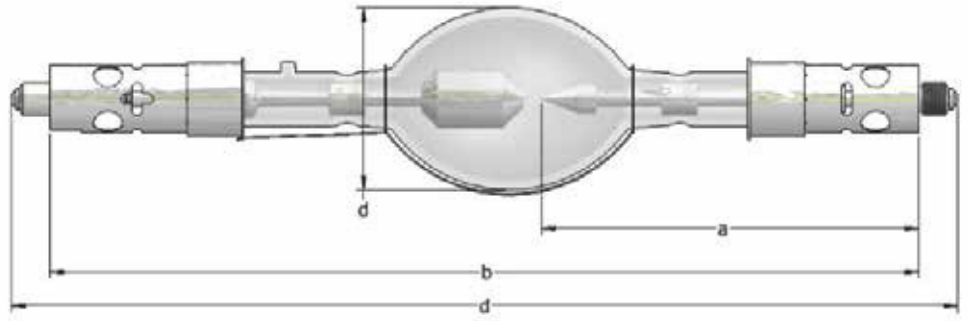

APPLICATIONS

Christie	CP2230, CP4230, CP2000-XB CP2000-S, CP2000-H
----------	---

TECHNICAL SPECIFICATIONS

Rated Power	W	6000
Rated Current	A	158
Operating Current Range	A	100-160
Rated Voltage	V	38
Distance a	mm	165.5
Length b	mm	381
Length c (max)	mm	415
Cold arc gap	mm	7.75
Bulb Diameter d	mm	80
Anode (+) Base Diameter	mm	30
Anode Pin Diameter	mm	14
Cathode (-) Base Diameter	mm	30
Cathode Thread Type		M14 x 1.5
Cable Length e	mm	N/A
Horizontal Operating Position	deg	± 15
Min. Cooling Air Flow Velocity	m/sec	7
Base Surface Temperature (max)	deg C	200

WARRANTY: 800 hours (100%)



Lighting Technologies International LLC
13700 Live Oak Avenue, Baldwin Park, CA,
USA 91706
www.ltilighting.com

Distributor:



Phone: 407-857-8770
Fax: 407-857-8771
Email: sales@techni-lux.com

Rev. 3 / 2020
Subject to Change