


# CSR Lamps

The GE CSR4000/SE/HR lamp is a metal halide lamp with an outer jacket and an arc gap of 24 mm providing greater optical control and luminance. This lamp is compact and suitable for hot restrike applications. The CSR4000/SE/HR is mainly used in event lighting, studio, and film lighting.

## Product Description CSR4000/SE/HR

•Order Description	CSR4000/SE/HR
•Product Code	48466
•Pack Quantity	6
•Rated Wattage	4,000W
•Rated Voltage	200± V
•Lamp Current (ECG/MCG)*	20.0A
•Ignition Voltage (cold/hot)	5/55(MAX)
•Lumens	380,000 Lm
•Lumens per watt	95
•Ra	>90
•Chromaticity coordinates	x 0.323 y 0.328
•Color temperature	6,000K
•Arc Length	24(MAX)mm
•Lamp length	MAX260
•Light center length	142±
•Lamp diameter	MAX76
•Average rated life	500
•Base	G38

\*ECG = electronic control gear/ MCG = Magnetic control gear

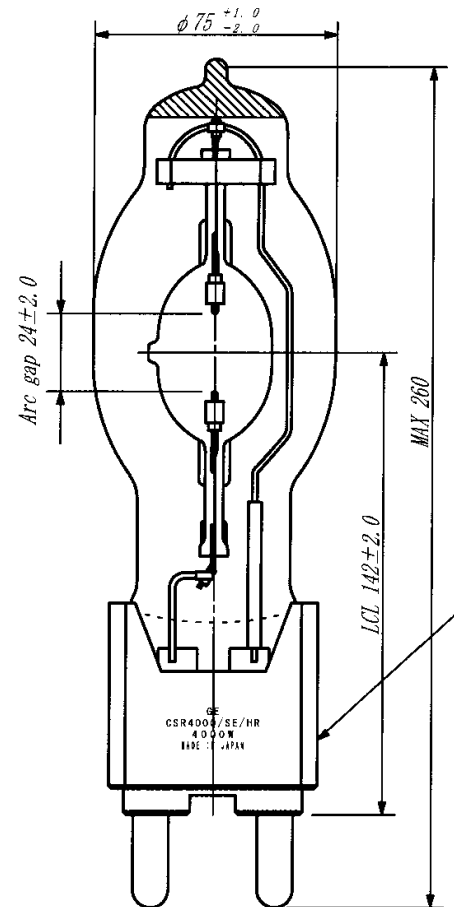

## Lamp Operation

Burn Position Any  
Maximum Seal Temperature 350° C  
Cooling Forced Cooling/Fan  
Lamp can be used on electronic or AC magnetic Ballast/igniters

## Application Information

- Do not exceed rated wattage or voltage
- Replace lamp at or before rated life
- Do not exceed rated seal temperature
- Use only with properly rated fixtures and ballasts

Distributor:



GE imagination at work

**Techni-Lux**  
www.techni-lux.com

Phone: 407-857-8770  
Fax: 407-857-8771  
Email: sales@techni-lux.com