


CSR Lamps

The GE CSR575/SS/DE is a double ended metal halide lamp that provides high efficiency, excellent color rendering, hot restrike capability, and a daylight color temperature. The CSR575/SS/DE/75 is used in event lighting field of entertainment lighting

Product Description CSR575/SS/DE/75

•Order Description	CSR575/SS/DE/75
•Product Code	45321
•Pack Quantity	10
•Rated Wattage	575W
•Rated Voltage	100±10V
•Lamp Current (ECG/MCG)*	5.8A
•Ignition Voltage (cold/hot)	3/220(MAX25)KV
•Lumens	44,000 Lm
•Lumens per watt	77
•Ra	>70
•Chromaticity coordinates	x 0.297 y 0.312
•Color temperature	7,500K
•Arc Length	5mm
•Lamp length	93 mm
•Reference length	70 mm
•Lamp diameter	MAX17
•Average rated life	500hr
•Base	SFc10-4 with notch

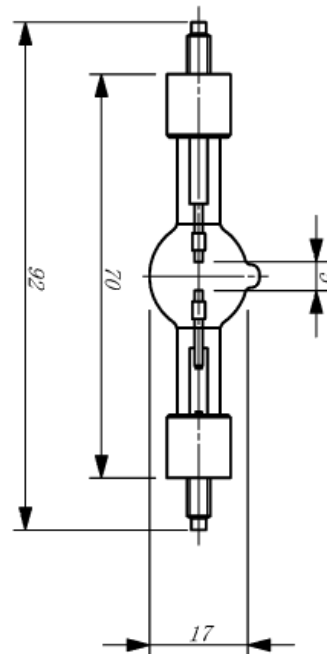

*ECG = electronic control gear/ MCG = Magnetic control gear

Lamp Operation

Burn Position	Any
Maximum Seal Temperature	500° C
Cooling	Forced Cooling/Fan
Lamp designed for electronic ballast .	
Performance may change for AC magnetic Ballast/igniters	

Application Information

- Do not exceed rated wattage or voltage
- Replace lamp at or before rated life
- Do not exceed rated seal temperature
- Use only with properly rated fixtures and ballasts

Distributor:



Phone: 407-857-8770
Fax: 407-857-8771
Email: sales@techni-lux.com