


CSR Lamps



The GE CSR6000/SE/HR lamp is a metal halide lamp with an outer jacket and an arc gap of 26 mm providing greater optical control and luminance. This lamp is compact and suitable for hot restrike applications. The CSR6000/SE/HR is mainly used in studio, and film lighting.

Product Description CSR6000SE/HR

• Order Description	CSR6000/SE/HR
• Product Code	48467
• Pack Quantity	6
• Rated Wattage	6,000W
• Rated Voltage	130± V
• Lamp Current (ECG/MCG)*	46.0A
• Ignition Voltage (cold/hot)	8/60(MAX)
• Lumens	540,000 Lm
• Lumens per watt	90
• Ra	>90
• Chromaticity coordinates	x 0.323 y 0.328
• Color temperature	6,000K
• Arc Length	26(MAX)mm
• Lamp length	MAX360
• Light center length	210±
• Lamp diameter	MAX86
• Average rated life	300
• Base	G38

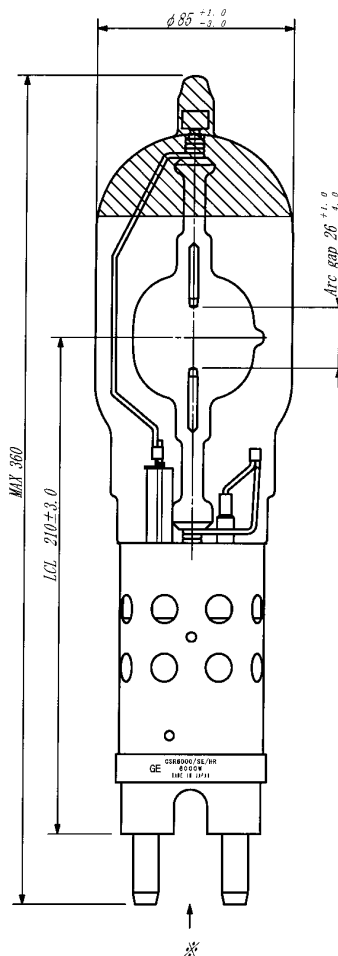

*ECG = electronic control gear/ MCG = Magnetic control gear

Lamp Operation Application Information

Burn Position Any
 Maximum Seal Temperature 350° C
 Cooling Forced Cooling/Fan
 Lamp can be used on electronic or AC magnetic
 Ballast/igniters

- Do not exceed rated wattage or voltage
- Replace lamp at or before rated life
- Do not exceed rated seal temperature
- Use only with properly rated fixtures and ballasts

Distributor:



GE and General Electric are both registered trademarks of the General Electric Company, USA. © General Electric Company (USA) 2006

GE Consumer & Industrial Specialty Lighting is constantly developing and improving its products. For this reason, all product descriptions in this brochure are intended as a general guide, and we may change specifications time to time in the interest of product development, without prior notification or public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, GE Lighting cannot accept any liability arising from the reliance on such data to the extent permitted by law.

CSR6000/SE/HR - Data sheet - July 2006

Phone: 407-857-8770
 Fax: 407-857-8771
 Email: sales@techni-lux.com