

8,000 ANSI Lumens • 1080p • 1-chip DLP®

E1P-HDT30

Full HD-1080p DLP® Theater Projector
with enhanced color reproduction.



Get the film-like imaging of DLP® technology with new BrilliantColor™ color reproduction in a large venue high definition projector.

Key Features:

- △ 8,000 ANSI lumens, full HD 1080p resolution and 7500:1 contrast ratio.
- △ 1-chip DLP® imaging technology delivers a "seamless" image.
- △ Upscales 720p. Supports other widescreen and standard aspect ratios.
- △ User-changeable color wheels to optimize brightness or color.
- △ 2 fixed inputs include a full suite of standard professional connections.
- △ 2 module bays permit customization. Built-in LAN control port.
- △ Optional modules include dual (HD/SD) SDI.
- △ Both horizontal & vertical power lens shift. Built-in mechanical shutter.
- △ Centered lens and one-way airflow simplify installation. Quick lens installation.
- △ Dual lamp system provides redundancy and permits 4 brightness levels.
- △ Illuminated control panel & wireless/wired remote. RS-232 & network control.
- △ Power management, keylock security, and custom warmup screen options.
- △ Power zoom and focus. Optional wideangle and telephoto lenses.
- △ Low maintenance: up-to 35,000 hour cartridge air filter.
- △ 3 year projector warranty.



EIKI
Projectors... and more!

EIP-HDT30 SPECIFICATIONS:

Brightness up-to 8,000 ANSI Lumens (w/lens AH-43005S)
 ("Dynamic" image mode & DynamicBlack™ Off)
 Illumination Uniformity 90%
 Color Reproduction 10 bit/1.07 Billion Colors
 Contrast Ratio up-to 7,500:1 (w/DynamicBlack™ high)
 Projection Lamp 330 watts VIDITM UHP x 2
 Estimated Lamp Life up-to 3000 hours of use
 Imaging System 0.95" DarkChip™ 1-chip DLP® x 1
 Native Resolution 1920 x 1080 (16:9 aspect ratio)
 Color System High brightness 4-segment color wheels x 2 (installed)
 Lens Not included (choose from a selection of optional lenses)
 Image Diagonal 50 ~ 600 in
 Image Width 3.64 ~ 43.6 ft (1.11 ~ 13.20 m)
 Throw Distance See specifications of selected lens
 Front Elevation / Maximum Pitch up-to 5° up/360°
 Vertical Anti Keystone Power Lens Shift (Top:Bottom) 6.65:-1 ~ -1:6.65
 Horizontal Anti Keystone Power Lens Shift (L:R-R:L) 10.7:1 ~ 1:10.7
 Vertical Keystone Correction Digital: up-to 30° Up or Down
 Horizontal Keystone Correction Digital: up-to 30° Left or Right
 Scanning Frequency Auto: H Sync. 15 ~ 120 kHz; V Sync. 48 ~ 120 Hz
 Dot Clock up-to 230 MHz
 Image Orientation Normal, Reversed, Inverted
 Local Control / Power Management Full Function / Auto Shut-Off
 Remote Projector Control Wireless / Wired x 1
 Wired Remote Port MiniStereo x 1
 Projector Service Port USB-B x 1
 RS-232 (Serial) Port / In & Out Dsub 9-pin x 1
 Wired LAN Control Port RJ45 x 1
 Computer: Compatibility UXGA (analog only), WUXGA-WXGA, SXGA+-VGA
 & MAC (analog or digital)
 Computer: Formats 1920 x 1200 through 640 x 480
 Computer: Image Sizing Normal, or Smart Compressed or Expanded
 Video: Color Systems NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
 Video: Aspect Ratios Supported 16:9, 4:3 and other


Video: Image Resizing Video Scaling Technology
 Video: Resolutions Supported
 SDTV (Composite, S-Video, Component) 480i/p, 575i/p
 HDTV 720p, 1080i/p, 1080 psp 30/25/24
 Signal Inputs: fixed
 1. a. Computer: Analog RGB Dsub15 x 1
 b. Computer: Digital RGB DVI-D x 1
 or Video: Digital Video w/HDCP
 c. Video: Digital Video (w/HDCP) HDMI x 1
 2. a. Computer: Analog RGBHV BNC x 5
 or Video: Composite / Component: Video / Y-Pb/Cb-Pr/Cr
 b. Video: S-Video S-Video x 1
 Signal Inputs: modules
 3. Empty module bay (unpopulated)
 4. Empty module bay (unpopulated)
 Signal Outputs:
 Data / Video Monitor: Analog RGB / Composite / Component Dsub15 x 1
 Operating Noise as low as 35 dBA
 Cabinet Size (HxWxD) 9.6 x 15.7 x 20.6 in (242.5 x 400 x 524.2 mm)
 Weight 43.2 lb (19.6 kg)
 Packaged Size (HxWxD) 17.3 x 20.8 x 25.6 in (439 x 528 x 651 mm)
 Packaged Weight 54.2 lb (24.6 kg)
 Power Requirements 100 ~ 240V AC, 50/60 Hz
 Power Consumption up-to 963 watts Standard Mode
 Heat up-to 3286 BTU/hr (727 Kcal/hr)
 Power Cord Type 3, Detachable
 Electrical Safety Compliance UL / cUL
 Electromagnetic Compatibility FCC Part 15 Class A
 Security Kensington® Security Slot, Handles (use as Security Bar)
 Operating Temperature 41 ~ 104°F (5 ~ 40°C)
 User Maintenance Replace Air Filter, Replace Lamps
 Warranty: (to the original end-use customer)
 Projector: 3 years (parts & labor to correct defects)
 Lamp: 6 months ownership / 500 hours use (whichever occurs first)

EIKI® is a registered trademark of Eiki International, Inc. Kensington® is a registered trademark of ACCO Brands Corporation.

Lamp interval timer permits alternate 1-lamp-ON in 24/7 use.
Extended use: Peltier device cooled DMD®, sealed optical engine.
Picture-in-Picture. Picture-by-Picture. Edge blending.



Professional inputs with 2 expansion bays.



Top-accessed color wheels.



Top-accessed lamps.



Complete local control.



EIP-HDT30 – Full HD-1080p DLP® Theater Projector with enhanced color reproduction.

INCLUDED ACCESSORIES:

Quick Setup Guide. Owner's Manual on CD-ROM.
 6 ft (1.8 M) AC Power Cord. Lens Cover. VGA-type
 Computer Input Cable (Dsub15). Wireless/wired
 Remote & 2 x AA batteries. Wired Remote Cable.
 Real Color Manager Pro Software on CD-ROM x 1.
 Cable Cover x 1. Cable Cover Support x 1. Cable
 tie x 3. Rich Color 6-Segment Color Wheels x 2.
 Lens Aperture Cover.

OPTIONAL ACCESSORIES:

Wideangle, Standard and Telephoto Lenses.
 Replacement Lamps. Replacement Filter Cartridge.
 ATA-Style Shipping Case with Wheels and Telescoping
 Handle. Dual SDI Module (only HD-SDI can be used).
 DVI-D & Dsub15 Module. 5BNC Module. 5BNC &
 S-Video Module. Ceiling Mount. Ceiling Post and Plate.

Specifications subject to change without notice. ©2011 Eiki International, Inc. Printed in the USA. 07/15/11

EIKI
 Projectors... and more!
 www.eiki.com

Distributor:

 Techni-Lux
 www.techni-lux.com
 Phone: 407-857-8770
 Fax: 407-857-8771
 Email: sales@techni-lux.com

4,700 ANSI Lumens • WUXGA (1920x1200) • 16:10 • DLP®

EIKI-U4700

"Meeting Room" Series Projector



24/7 Operability*1

Excellent choice for Classrooms or Conference Rooms!



Key Features:

- △ 4,700 ANSI lumens bright with 80% uniformity and a 2200:1 contrast ratio.
- △ HDMI and Display Port Digital connectivity with HDCP compliance.
- △ Native WUXGA resolution. Compatible with inputs up-to UXGA and WUXGA.
- △ Supports analog and digital video input in all color standards up-to 1080p.
- △ Compatible with Crestron RoomView™ & AMX Device Discovery Technology.
- △ Vari-focal mid-range (1.2:1) manual zoom and focus lens. Fixed image offset.
- △ Accepts composite, component, and S-Video in all major standards.
- △ Displays both 4:3 and 16:9 aspect ratios. Supports most HDTV resolutions.
- △ Built-in 3 Watt sound system. Closed Caption decoding (NTSC).
- △ Wired network monitoring and control. Digital zoom: 50% to 400%.
- △ 3D Function (glasses not included).
- △ Top-accessed lamp for ease of maintenance.
- △ Custom warm-up screen. Auto input selection.
- △ Security bar. Kensington® MicroSaver® security slot. PIN lock.
- △ 3 year projector warranty.

*1 Replace lamp as necessary.




EIKI®
Projectors... and more!

EIP-U4700 Specifications:



Brightness	4,700 ANSI Lumens
Contrast Ratio	2,200:1
Illumination Uniformity	80%
Resolution and Aspect Ratio	WUXGA (1920 x 1200), 16:10
Color Reproduction	1.07 billion colors
Projection Lamp	310 Watts UHP
Estimated Lamp Life	up-to 4,000 hours
Total Pixels	2,304,000 (1920 x 1200) x 1
Imaging System	0.67" DMD™ DLP® chip x 1
Scanning Frequency	Auto: H Sync. 31 ~ 92 kHz, V Sync. 48 ~ 120 Hz
Pixel Clock	150 MHz
Lens	Attached (Vari-focal) Manual Zoom and Focus
Lens Specs	Speed: f : 2.5 ~ 2.76; FL: 0.925 ~ 1.110 in (23.5 ~ 28.2 mm)
Lens Ratios	Zoom Max:Min: 1.2:1; Throw:Width 1.6 ~ 1.92:1
Image Diagonal	24 ~ 300 in (60.9 ~ 762 cm)
Image Width	1.7 ~ 21.3 ft (0.52 ~ 6.5 m)
Throw Distance	3.28 ~ 32.8 ft (1.0 ~ 10.0 m)
Projector Elevation Adjustment (legs)	up-to 10°
Maximum Pitch	up-to 15° Up or Down
Fixed Image Offset	108.4% of image Height Up
Vertical Keystone Correction	Digital: up-to 30° Up or Down
Image Orientation	Normal, Reversed, Inverted
Local Control / Power Management	Full Function / Auto Shutdown
Remote Control / Service	Wireless (with laser pointer) x 1 / USB-B x 1
RS-232 Control	Dsub9 x 1
LAN Port	RJ45 x 1
Computer Input in Pixels	up-to 1600 x 1200 (4:3), 1920 x 1200 (16:10)
Analog 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
Analog Wide Inputs	WUXGA, WSXGA+, WXGA+, WXGA
Digital 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
Digital Wide Inputs	WUXGA, WSXGA+, WXGA+, WXGA
Video Formats	NTSC / PAL / SECAM
Video Input Analog	480i/p, 575i/p
Video Input Digital	480p, 575p, 720p, 1080i/p
Image Signal Resizing	Smart Scaling Technology

Image Signal Inputs	
Computer 1 / Component (w/optional adapter)	Dsub15 x 1
Computer 2 / Component (w/optional adapter)	Dsub15 x 1
Digital Video (w/ HDCP)	HDMI x 2
Digital Video (w/ HDCP)	DisplayPort x 1
S-Video	S-Video x 1
Composite Video	RCA x 1
Audio Signal Inputs	
Computer Audio	MiniStereo x 1
Video Audio	RCA x 2 (L/R)
Outputs	
Computer Monitor (Analog)	Dsub15 x 1
Audio Output	Variable, Stereo: MiniStereo x 1
Amplifier	Mono: 3 Watt
Speaker	1.4 in (3.7 cm) x 1 (Mono)
Screen Trigger	DC12V x 1
3D	3D Sync x 1
Fan Noise	as low as 35 dBA
Cabinet Size (HxWxD)	4.75 x 13.3 x 10.5 in (12.0 x 33.8 x 26.7 cm) (excluding legs)
Weight	8.4 lb (3.8 kg)
Packaged Cabinet Size (HxWxD)	7.7 x 17.9 x 19.6 in (19.5 x 45.4 x 49.7 cm)
Packaged Weight	12.8 lb (5.8 kg)
Operating Temperature	41 ~ 95°F (5 ~ 35°C)
Electrical Safety Compliance	IEC / UL / cUL
Electromagnetic Compatibility	FCC Class B, CE Mark
Power Requirements	100 ~ 240V AC, 50/60 Hz
Power Consumption	0.5 W in Eco Standby mode, up-to 370W
Heat	up-to 1,263 BTU/hr
Security Facilities	Security Bar, Kensington® Security Slot
UPC	45171194676662
User Maintenance	Replace Lamp
Limited Warranty: to the original end-use customer only	
Projector	*3 years / 6000 hours
Lamp	*1 year ownership / 500 hours use (which ever occurs first)

EIKI® is a registered trademark of Eiki International, Inc. Kensington® is a registered trademark of ACCO Brands Corporation. DLP® and DMD™ are trademarks of registered trademarks of Texas Instruments.

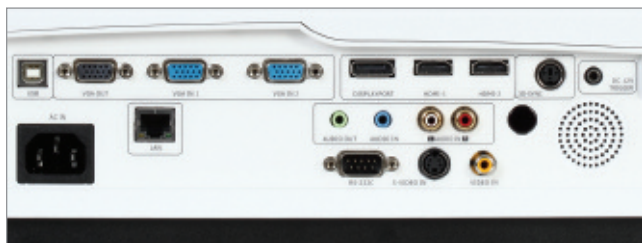

Includes a full complement of connections, including network control.

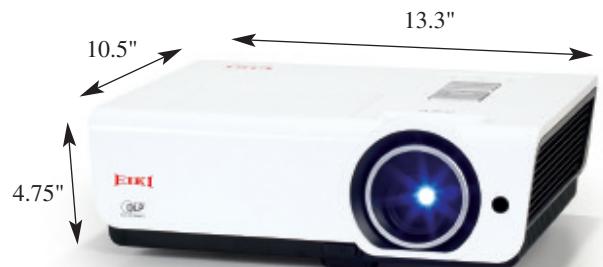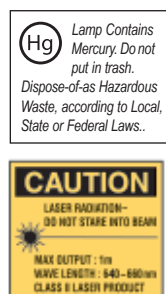

EIP-U4700 • WUXGA • DLP® projector.



Connect and project.



Easy to change long-life lamp.

INCLUDED ACCESSORIES:

Quick Start Guide, Owner's Manual on CD-ROM, VGA Computer Input Cable (Dsub15 to Dsub15), 6.0 ft (1.8 m) Detachable Power Cord, Remote Control (with 2 AAA Batteries), Soft Carry Bag.

OPTIONAL ACCESSORIES:

Replacement Lamp, Component Video Input Cable (Dsub15 to 3RCA), Ceiling Mount, Ceiling Post and Plate.

Specifications subject to change without notice. ©2013 Eiki International, Inc. Printed in the USA. 12/15/13

EIKI
Projectors... and more!
www.eiki.com

Distributor:

Techni-Lux
www.techni-lux.com
Phone: 407-857-8770
Fax: 407-857-8771
Email: sales@techni-lux.com

4,600 ANSI Lumens • WXGA (1280x800) • 16:10 • DLP®

EIKI-W4600

"Meeting Room" Series Projector



24/7 Operability*1
Excellent choice for Classrooms or Conference Rooms!

Key Features:

- △ 4,600 ANSI lumens bright with 80% uniformity and a 2200:1 contrast ratio.
- △ HDMI and Display Port Digital connectivity with HDCP compliance.
- △ Native WXGA resolution. Compatible with inputs up-to UXGA and WSXGA+.
- △ Supports analog and digital video input in all color standards up-to 1080p.
- △ Compatible with Crestron RoomView™ & AMX Device Discovery Technology.
- △ Vari-focal mid-range (1.2:1) manual zoom and focus lens. Fixed image offset.
- △ Accepts composite, component, and S-Video in all major standards.
- △ Displays both 4:3 and 16:9 aspect ratios. Supports most HDTV resolutions.
- △ Built-in 3 Watt sound system. Closed Caption decoding (NTSC).
- △ Wired network monitoring and control. Digital zoom: 50% to 400%.
- △ 3D Function (glasses not included).
- △ Top-accessed lamp for ease of maintenance.
- △ Custom warm-up screen. Auto input selection.
- △ Security bar. Kensington® MicroSaver® security slot. PIN lock.
- △ 3 year projector warranty.

*1 Replace lamp as necessary.




EIKI®
Projectors... and more!

EIP-W4600 Specifications:


Brightness	4,600 ANSI Lumens
Contrast Ratio	2,200:1
Illumination Uniformity	80%
Resolution and Aspect Ratio	WXGA (1280 x 800), 16:10
Color Reproduction	1.07 billion colors
Projection Lamp	310 Watts UHP
Estimated Lamp Life	up-to 4,000 hours
Total Pixels	1,024,000 (1280 x 800) x 1
Imaging System	0.65" DMD™ DLP® chip x 1
Scanning Frequency	Auto: H Sync. 31 ~ 92 kHz, V Sync. 48 ~ 120 Hz
Pixel Clock	150 MHz
Lens	Attached (Vari-focal) Manual Zoom and Focus
Lens Specs	Speed: f : 2.5 ~ 2.76; FL: 0.925 ~ 1.110 in (23.5 ~ 28.2 mm)
Lens Ratios	Zoom Max:Min: 1.15:1; Throw:Width 1.66 ~ 2.02:1
Image Diagonal	28 ~ 300 in (71.1 ~ 762 cm)
Image Width	1.9 ~ 21.3 ft (0.59 ~ 6.5 m)
Throw Distance	3.9 ~ 32.8 ft (1.2 ~ 10.0 m)
Projector Elevation Adjustment (legs)	up-to 10°
Maximum Pitch	up-to 15° Up or Down
Fixed Image Offset	111.3% of Image Height up
Vertical Keystone Correction	Digital: up-to 30° Up or Down
Image Orientation	Normal, Reversed, Inverted
Local Control / Power Management	Full Function / Auto Shutdown
Remote Control / Service	Wireless (with laser pointer) x 1 / USB-B x 1
RS-232 Control	Dsub9 x 1
LAN Port	RJ45 x 1
Computer Input in Pixels	up-to 1600 x 1200 (4:3), 1680 x 1050 (16:10)
Analog 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
Analog Wide Inputs	WSXGA+, WXGA+, WXGA
Digital 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
Digital Wide Inputs	WSXGA+, WXGA+, WXGA
Video Formats	NTSC / PAL / SECAM
Video Input Analog	480i/p, 575i/p
Video Input Digital	480p, 575p, 720p, 1080i/p
Image Signal Resizing	Smart Scaling Technology

Image Signal Inputs	
Computer 1 / Component (w/optional adapter)	Dsub15 x 1
Computer 2 / Component (w/optional adapter)	Dsub15 x 1
Digital Video (w/ HDCP)	HDMI x 2
Digital Video (w/ HDCP)	DisplayPort x 1
S-Video	S-Video x 1
Composite Video	RCA x 1
Audio Signal Inputs	
Computer Audio	MiniStereo x 1
Video Audio	RCA x 2 (L/R)
Outputs	
Computer Monitor (Analog)	Dsub15 x 1
Audio Output	Variable, Stereo: MiniStereo x 1
Amplifier	Mono: 3 Watt
Speaker	1.4 in (3.7 cm) x 1 (Mono)
Screen Trigger	DC12V x 1
3D	3D Sync x 1
Fan Noise	as low as 35 dBA
Cabinet Size (HxWxD)	4.75 x 13.3 x 10.5 in (12.0 x 33.8 x 26.7 cm) (excluding legs)
Weight	8.4 lb (3.8 kg)
Packaged Cabinet Size (HxWxD)	7.7 x 17.9 x 19.6 in (19.5 x 45.4 x 49.7 cm)
Packaged Weight	12.8 lb (5.8 kg)
Operating Temperature	41 ~ 95°F (5 ~ 35°C)
Electrical Safety Compliance	IEC / UL / cUL
Electromagnetic Compatibility	FCC Class B, CE Mark
Power Requirements	100 ~ 240V AC, 50/60 Hz
Power Consumption	0.5 W in Eco Standby mode, up-to 370W
Heat	up-to 1,263 BTU/hr
Security Facilities	Security Bar, Kensington® Security Slot
UPC	4571194676631
User Maintenance	Replace Lamp
Limited Warranty: to the original end-use customer only	
Projector	*3 years / 6000 hours
Lamp	*1 year ownership / 500 hours use (which ever occurs first)

EIKI® is a registered trademark of Eiki International, Inc. Kensington® is a registered trademark of ACCO Brands Corporation. DLP® and DMD™ are trademarks of registered trademarks of Texas Instruments.

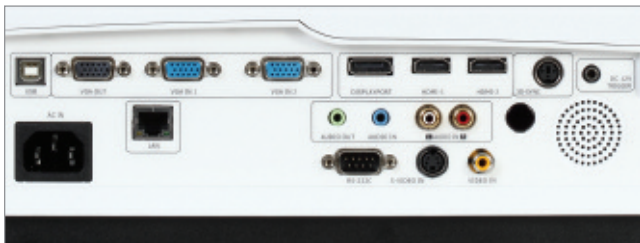

Includes a full complement of connections, including network control.

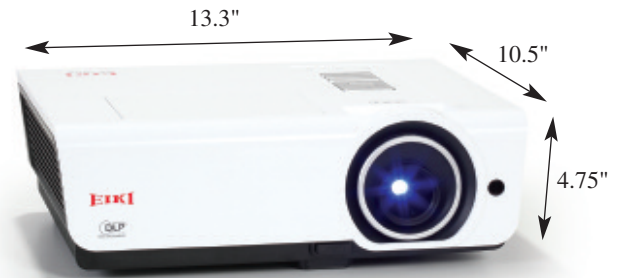

EIP-W4600 • WXGA • DLP® projector.



Connect and project.



Easy to change long-life lamp.

INCLUDED ACCESSORIES:

Quick Start Guide, Owner's Manual on CD-ROM, VGA Computer Input Cable (Dsub15 to Dsub15), 6.0 ft (1.8 m) Detachable Power Cord, Remote Control (with 2 AAA Batteries), Soft Carry Bag.

OPTIONAL ACCESSORIES:

Replacement Lamp, Component Video Input Cable (Dsub15 to 3RCA), Ceiling Mount, Ceiling Post and Plate.

EIKI
Projectors... and more!
www.eiki.com

Distributor:

Techni-Lux
www.techni-lux.com

Phone: 407-857-8770
Fax: 407-857-8771
Email: sales@techni-lux.com

16,000 ANSI Lumens • 3LCD+One

LC-XT6

Theater Series Projector



Get the rich color imaging of 3LCD+One technology in an installation projector with unparalleled brightness and compatibility.

Key Features:

- △ 16,000 ANSI lumens bright with 90% uniformity and a 2500:1 contrast ratio.
- △ Native XGA resolution. Compatible with inputs up-to UXGA and WUXGA.
- △ Supports analog and digital video input in all color standards.
- △ 3LCD+One imaging system delivers more sophisticated color.
- △ 10-bit color processing, for superior color reproduction.
- △ Supplied without lens. Range of power zoom and focus lenses available.
- △ Bi-directional Vertical & Horizontal power lens shift, keystone and corner correction.
- △ Accepts composite, component, and S-Video in all major standards.
- △ Compatible with AMX Device Discovery System.
- △ DVI-D (with HDCP) and HDMI® inputs support digital computer and video.
- △ Built-in wired LAN connection for projector monitoring and control.
- △ Pleated air filter (up to 5,000 hours). Optional smoke filter.
- △ Edge blending functions and color matching.
- △ Mechanical shutter for true black screen. 2 and 4 lamp operation.
- △ Four hot-swappable lamps. Half inch (1.2 cm) steel plate chassis.
- △ 3 year projector warranty.



EIKI
Projectors... and more!

LC-XT6 SPECIFICATIONS:

Brightness up-to 16,000 ANSI Lumens (with AH-22051 lens)
 Contrast Ratio up-to 2500:1
 Illumination Uniformity (corner to center) 90%
 Resolution and Aspect Ratio XGA (1024 x 768), 4:3
 Color Reproduction 10-bit (1.07 billion colors)
 Projection Lamp 380 Watts NSHA x 4
 Estimated Lamp Life up-to 3,000 Hours
 Imaging System 1.8 in (45 mm) Inorganic LCD Panels x 3
 with proprietary Color Control Device
 Total Pixels 2,359,296 ((1024x768) x 3)
 Scanning Frequency Auto: H: 15-120 kHz; V: 48-120 Hz
 Pixel Clock up-to 230 MHz
 Lens Changeable - Does not come with Lens
 Image Diagonal 100 - 600 in (254 - 1,524 cm)
 Image Width 7.4 - 44.2 ft (2.2 - 13.5 m)
 Throw Distance See specifications of selected lens
 Projector Elevation Adjustment (legs) up-to 3° Up or Down
 Maximum Pitch up-to 360°
 Vertical Lens Shift (% of image height) up-to 50% Up or Down
 Horizontal Lens Shift (% of image width) up-to 10% Left or Right
 Vertical Keystone Correction Digital: up-to 40° Up or Down
 Horizontal Keystone Correction Digital: up-to 40° Left or Right
 Image Orientation Normal, Reversed, Inverted
 Local Control / Power Management Full Function / Auto Shutdown
 Remote Projector Control Wireless/Wired x 1
 Wired Remote Control Port MiniStereo x 1
 RS232 Control Ports (In & Out) Dsub9 x 2
 LAN Port RJ45 x 1
 Service Port USB-B x 1
 Computer Input in Pixels up-to 1600x1200 (4:3), 1920x1200 (16:10)
 Analog 4x3 Inputs UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
 Analog Wide Inputs WXGA+, WXGA
 Digital 4x3 Inputs SXGA+, SXGA, XGA, SVGA, VGA
 Digital Wide Inputs WUXGA, WSXGA+, WXGA+, WXGA


Video Formats NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
 Image Signal Resizing Smart Scaling Technology
 Video Input Analog 480i/p, 575i/p, 720p, 1035i, 1080i
 Video Input Digital 480i/p, 575i/p, 720p, 1035i, 1080i/p
 Image Signal Inputs
 1. a. Computer Dsub15 x 1
 b. DVI-D (with HDCP) DVI-D x 1
 c. HDMI 1.3 with Deep Color HDMI x 1
 2. a. Analog Video (RGBHV) BNC x 5
 Component Video (Y, Pb/Cb, Pr/Cr), 3BNC
 Composite Video, 1BNC
 2. b. S-Video S-Video x 1
 3. Unpopulated Module Bay
 4. Unpopulated Module Bay
 Fan Noise as low as 48 dBA
 Cabinet Size (HxWxD) 13.7 x 25.6 x 32.1 in (34.9 x 65.0 x 81.5 cm)
 Weight 102.5 lb (46.5 kg)
 Packaged Size (HxWxD) 21.3 x 33.3 x 37.4 in (54.2 x 84.6 x 95.1 cm)
 Packaged Weight 125.7 lb (57.0 kg)
 Power Requirements 200 ~ 240V AC, 50/60 Hz
 Power Consumption up-to 1,850 W
 Heat up-to 6,986 BTU/hr
 Power Cord approx. 10 ft (3 m) NEMA 6-20P, Detachable
 Electrical Safety Compliance IEC, UL, cUL
 Electromagnetic Compatibility FCC Class A, CE Mark
 Operating Temperature 41 ~ 104°F (5 ~ 40°C)
 Security Facilities Steel Plate Chassis & Integrated Handles, More
 Air Filter Pleated Filter - up-to 5,000 Hours
 User Maintenance Replace Filters, Change Lamps
 UPC 4571194676020
 Limited Warranty: to the original end-use customer only
 Projector 3 years
 Lamp 6 months ownership / 500 hrs use (which ever occurs first)

EIKI® is a registered trademark of Eiki International, Inc. HDMI is a registered trademark of HDMI Licensing LLC.

Vivid Color with 3LCD+One Imaging.
High Contrast from Durable Inorganic LCD Panels.
Four hot-swappable lamps, so the show can go on.




Broad selection of lenses.



3LCD+One Engine.



Built-in complement of professional inputs, and room for more. Choose from SD/HD-SDI, Dual-Link SDI, VGA/DVI and 5BNC/S-Video modules.



LC-XT6 • 3LCD+One projector
 (Shown with optional lens)

INCLUDED ACCESSORIES:

Quick Start Guide, Owner's Manual on CD-ROM, Network Software on CD-ROM, Color Management Software on CD-ROM, Power Cord, Power Cord Clamp, Lens Attachment, Lens Light Block Sheets x 3, Lens Spacers x 3, Lens Safety Clamps x 2, VGA Computer Input Cable (Dsub15 to Dsub15), Wireless/Wired Remote Control (with 2 AAA Batteries), Wired Remote Cable (MiniStereo-MiniStereo).

OPTIONAL ACCESSORIES:

Replacement Lamps, Wideangle, Midrange and Telephoto Lenses, Additional DVI-D & Dsub15 Input Module, Additional 5BNC & S-Video Input Module, HD/SD-SDI Input Module, Dual-Link SDI Input Module, Replacement Air Filter, Smoke Resistant Filter Kit, Smoke Resistant Filter, ATA-Style Shipping Case with Wheels and Telescoping Handle, Ceiling Mount, Ceiling Post & Plate.

Specifications subject to change without notice. ©2013 Eiki International, Inc. Printed in the USA. 01/23/13

EIKI
 Projectors... and more!
 www.eiki.com

Distributor:

 Techni-Lux
 www.techni-lux.com
 Phone: 407-857-8770
 Fax: 407-857-8771
 Email: sales@techni-lux.com



LC-XL200A

6,000 Lumens • XGA • 3LCD

Conference Series Projector

- ✓ High Contrast Durable Inorganic LCD Panels
- ✓ Cost-Effective Large Venue Performance
- ✓ Crestron RoomView™ & AMX Device Discovery Technology

- ◆ 6,000 ANSI lumens bright with 90% uniformity and a 2000:1 contrast ratio.
- ◆ Native XGA resolution. Compatible with inputs up-to UXGA and WUXGA.
- ◆ Supports analog and digital video input in all color standards up-to 1080p.
- ◆ Durable inorganic 3-panel LCD imaging engine with a high contrast ratio.
- ◆ 10-bit color processing, for superior color reproduction.
- ◆ Power zoom and focus lens. Optional wide-angle and telephoto lenses.
- ◆ Vertical and horizontal power lens shift and digital keystone correction.
- ◆ Includes a full set of analog and digital computer and video inputs.
- ◆ Built-in 7 Watt amplifier and speaker system. Closed Caption decoding.
- ◆ Wired LAN connection for monitoring and control. Optional PjNET interface.
- ◆ Self-advancing cartridge air filter provides up-to 13,000 hours use.
- ◆ Centered lens with 1-button release. Top-accessed lamp, side-accessed filter.
- ◆ Variable power management option. Optional local or remote keylock.
- ◆ Mechanical shutter for true black screen. Corner keystone correction.
- ◆ Wireless/wired remote with mouse control.
- ◆ 3 year projector warranty.

EIKI

Projectors... and more!

Combining large venue projection features with durable components and reduced maintenance, here's a projector that delivers big screen performance on a budget. The EIKI LC-XL200A comes complete with a wide-range power zoom and focus lens as standard equipment. Also available is the LC-XL200AL, offered without lens and ready for a selection from a suite of optional lenses.



Get the rich color imaging of 3-panel LCD technology in a compact, lightweight interchangeable lens projector.

SPECIFICATIONS:

Brightness	6,000 ANSI Lumens (with standard AH-24741 lens)
Contrast Ratio	2000:1
Illumination Uniformity	90%
Resolution and Aspect Ratio	XGA (1024x768), 4:3
Color Reproduction	10-bit (1.07 billion colors)
Projection Lamp	330 Watts NSHA
Estimated Lamp Life	up-to 3,000 hours
Total Pixels	2,359,296 (1024x768) x 3
Imaging System	0.8 in (20 mm) Inorganic LCD Panels x 3
Scanning Frequency	Auto: H Sync: 15-100 kHz, V Sync: 48-100 Hz
Pixel Clock	230 MHz Analog, 162 MHz DVI-D
Lens	Changeable - Power Zoom and Focus
Lens Specs	Speed: f:1.7-2.3; FL: 1.06-1.78 in (26.9-45.4 mm)
Lens Ratios	Zoom Max:Min: 1.7:1; Throw:Width 1.7-2.89:1
Image Diagonal	40-400 in (102-1,016 cm)
Image Width	2.67-26.7 ft (0.81-8.1 m)
Throw Distance	4.3-75.1 ft (1.3-22.9 m)
Projector Elevation Adjustment (legs)	up-to 4° Up or Down
Maximum Pitch	up-to 360°
Vertical Lens Shift (% of image height)	up-to 50% Up or Down
Horizontal Lens Shift (% of image height)	up-to 10% Left or Right
Vertical Keystone Correction	Digital: up-to 40° Up or Down
Horizontal Keystone Correction	Digital: up-to 20° Left or Right
Image Orientation	Normal, Reversed, Inverted
Local Control / Power Management	Full Function/Auto Shutdown
Remote Control	Wireless/Wired x 1
Wired Remote Control	MiniStereo x 1
Mouse Port	USB Type B x 1
RS-232 Control	Dsub9 x 1
LAN Port	RJ45 x 1
Optional Network Interface Port	Dsub25 x 1
Computer Input in Pixels	up-to 1600x1200 (4:3), 1920x1200 (16:10)
Analog 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
Analog Wide Inputs	WUXGA, WSXGA, WXGA
Digital 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
Digital Wide Inputs	WUXGA, WSXGA+, WSXGA, WXGA+, WXGA
Video Formats	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
Video Input Analog	480i/p, 575i/p, 720p, 1035i, 1080i/p
Video Input Digital	480p, 575p, 720p, 1035i, 1080i/p
Image Signal Resizing	Smart Scaling Technology
Image Signal Inputs	
1a. Analog Computer	Dsub15 x 1
1b. Digital Computer/Digital Video w HDCP	DVI-D x 1
2. Analog Computer (RGBHV)	BNC x 5
Component Video, 3BNC	
Composite Video, 1BNC	
3a. Component Video	RCA x 3
Composite Video, 1RCA	
3b. S-Video	S-Video x 1
Audio Signal Inputs	
For Inputs 1 & 2	Stereo: MiniStereo x 2
For Input 3	RCA x 2 (L/R)
Outputs	
Computer Monitor	Dsub15 x 1
Audio Output	Variable, Stereo: MiniStereo x 1
Amplifier	Mono: 7 Watt
Speaker	1.46 in (3.7 cm) x 1 (Mono)
Fan Noise	as low as 31 dBA
Cabinet Size (HxWxD) - LC-XL200A	6.46 x 19.27 x 17.12 in (16.4 x 48.9 x 43.5 cm)
Cabinet Size (HxWxD) - LC-XL200AL	6.46 x 19.27 x 14.61 in (16.4 x 48.9 x 37.1 cm)
Weight - LC-XL200A	21.6 lb (9.8 kg)
Weight - LC-XL200AL	19.8 lb (9.0 kg)
Packaged Cabinet Size (HxWxD)	12.5 x 26.8 x 22.9 in (31.8 x 68.1 x 58.1 cm)
Packaged Weight - LC-XL200A	35.0 lb (15.9 kg)
Packaged Weight - LC-XL200AL	33.3 lb (15.1 kg)
Operating Temperature	41-95°F (5-35°C)
Electrical Safety Compliance	IEC/UL/cUL
Electromagnetic Compatibility	FCC Class B, CE Mark
Power Requirements	100-240V AC, 50/60Hz
Power Consumption	0.4 W in Eco Standby mode, up-to 423 W
Heat	up-to 1,672 BTU/hr
Security Facilities	Kensington® Security Slot
UPC - LC-XL200A	4571194676082
UPC - LC-XL200AL	4571194676204
User Maintenance	Replace Filter Cartridge, Replace Lamp
Limited Warranty: to the original end use customer only	
Projector:	*3 years / 6000 hours
Lamp:	*6 month ownership / 500 hours use *(whichever occurs first)



LC-XL200A - XGA • 3LCD "Conference" Projector.



Here's everything you need to connect and project.



Quick lens change.



Range of wide-angle and telephoto lenses.



Easy lamp change.



Replaceable air filter cartridge.



Remote control.

INCLUDED ACCESSORIES:

Quick Start Guide, Owner's Manual on CD-ROM, VGA Computer Input Cable (Dsub15 to Dsub15), 10 ft (3 m) Detachable Power Cord, Wireless Remote Control (with 2 AAA Batteries), Network Software on CD-ROM, Lens Cover, USB Cable for Computer Mouse Control.

OPTIONAL ACCESSORIES:

Replacement Lamp, Wideangle, Midrange and Telephoto Lenses, ATA-Style Shipping Case with Wheel and Telescoping Handle, PiNet Network Interface, Ceiling Mount, Ceiling Post and Plate.

Talk to your EIKI Dealer... the "pro" in projectors.

Distributor:



Phone: 407-857-8770

Fax: 407-857-8771

Email: sales@techni-lux.com





LC-XL100A

5,000 Lumens • XGA • 3LCD

Conference Series Projector

- ✓ High Contrast Durable Inorganic LCD Panels
- ✓ Low Maintenance Long Life Cartridge Air Filter
- ✓ Crestron RoomView™ & AMX Device Discovery Technology

- ◆ 5,000 ANSI lumens bright with 90% uniformity and a 2000:1 contrast ratio.
- ◆ Native XGA resolution. Compatible with inputs up-to UXGA and WUXGA.
- ◆ Supports analog and digital video input in all color standards up-to 1080p.
- ◆ Durable inorganic 3-panel LCD imaging engine with a high contrast ratio.
- ◆ 10-bit color processing, for superior color reproduction.
- ◆ Power zoom and focus lens. Optional wide-angle and telephoto lenses.
- ◆ Vertical and horizontal power lens shift and digital keystone correction.
- ◆ Includes a full set of analog and digital computer and video inputs.
- ◆ Built-in 7 Watt amplifier and speaker system. Closed Caption decoding.
- ◆ Wired LAN connection for monitoring and control. Optional PjNET interface.
- ◆ Self-advancing cartridge air filter provides up-to 13,000 hours use.
- ◆ Centered lens with 1-button release. Top-accessed lamp, side-accessed filter.
- ◆ Variable power management option. Optional local or remote keylock.
- ◆ Mechanical shutter for true black screen. Corner keystone correction.
- ◆ Wireless/wired remote with mouse control.
- ◆ 3 year projector warranty.

EIKI
Projectors... and more!

Combining large venue projection features with durable components and reduced maintenance, here's a projector that delivers big screen performance on a budget. The EIKI LC-XL100A comes complete with a wide-range power zoom and focus lens as standard equipment. Also available is the LC-XL100AL, offered without lens and ready for a selection from a suite of optional lenses.



Get the rich color imaging of 3-panel LCD technology in a compact, lightweight interchangeable lens projector.

SPECIFICATIONS:

Brightness	5,000 ANSI Lumens (with standard AH-24741 lens)
Contrast Ratio	2000:1
Illumination Uniformity	90%
Resolution and Aspect Ratio	XGA (1024x768), 4:3
Color Reproduction	10-bit (1.07 billion colors)
Projection Lamp	275 Watts NSHA
Estimated Lamp Life	up to 3,000 hours
Total Pixels	2,359,296 (1024x768) x 3
Imaging System	0.8 in (20 mm) Inorganic LCD Panels x 3
Scanning Frequency	Auto: H Sync: 15-100 kHz, V Sync: 48-100 Hz
Pixel Clock	230 MHz Analog, 162 MHz DVI-D
Lens	Changeable - Power Zoom and Focus
Lens Specs	Speed: f:1.7-2.3; FL: 1.06-1.78 in (26.9-45.4 mm)
Lens Ratios	Zoom Max:Min: 1.7:1; Throw:Width 1.7-2.89:1
Image Diagonal	40-400 in (102-1,016 cm)
Image Width	2.67-26.7 ft (0.81-8.1 m)
Throw Distance	4.3-75.1 ft (1.3-22.9 m)
Projector Elevation Adjustment (legs)	up to 4° Up or Down
Maximum Pitch	up to 360°
Vertical Lens Shift (% of image height)	up to 50% Up or Down
Horizontal Lens Shift (% of image height)	up to 10% Left or Right
Vertical Keystone Correction	Digital: up to 40° Up or Down
Horizontal Keystone Correction	Digital: up to 20° Left or Right
Image Orientation	Normal, Reversed, Inverted
Local Control / Power Management	Full Function/Auto Shutdown
Remote Control	Wireless/Wired x 1
Wired Remote Control	MiniStereo x 1
Mouse Port	USB Type B x 1
RS-232 Control	Dsub9 x 1
LAN Port	RJ45 x 1
Optional Network Interface Port	Dsub25 x 1
Computer Input in Pixels	up to 1600x1200 (4:3), 1920x1200 (16:10)
Analog 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
Analog Wide Inputs	WUXGA, WSXGA, WXGA
Digital 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
Digital Wide Inputs	WUXGA, WSXGA+, WSXGA, WXGA+, WXGA
Video Formats	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
Video Input Analog	480i/p, 575i/p, 720p, 1035i, 1080i/p
Video Input Digital	480p, 575p, 720p, 1035i, 1080i/p
Image Signal Resizing	Smart Scaling Technology
Image Signal Inputs	
1a. Analog Computer	Dsub15 x 1
1b. Digital Computer/Digital Video w HDCP	DVI-D x 1
2. Analog Computer (RGBHV)	BNC x 5
Component Video, 3BNC	
Composite Video, 1BNC	
3a. Component Video	RCA x 3
Composite Video, 1RCA	
3b. S-Video	S-Video x 1
Audio Signal Inputs	
For Inputs 1 & 2	Stereo: MiniStereo x 2
For Input 3	RCA x 2 (L/R)
Outputs	
Computer Monitor	Dsub15 x 1
Audio Output	Variable, Stereo: MiniStereo x 1
Amplifier	Mono: 7 Watt
Speaker	1.46 in (3.7 cm) x 1 (Mono)
Fan Noise	as low as 31 dBA
Cabinet Size (HxWxD) - LC-XL100A	6.46 x 19.27 x 17.12 in (16.4 x 48.9 x 43.5 cm)
Cabinet Size (HxWxD) - LC-XL100AL	6.46 x 19.27 x 14.61 in (16.4 x 48.9 x 37.1 cm)
Weight - LC-XL100A	21.6 lb (9.8 kg)
Weight - LC-XL100AL	19.8 lb (9.0 kg)
Packaged Cabinet Size (HxWxD)	12.5 x 26.8 x 22.9 in (31.8 x 68.1 x 58.1 cm)
Packaged Weight - LC-XL100A	35.0 lb (15.9 kg)
Packaged Weight - LC-XL100AL	33.3 lb (15.1 kg)
Operating Temperature	41-95°F (5-35°C)
Electrical Safety Compliance	IEC/UL/cUL
Electromagnetic Compatibility	FCC Class B, CE Mark
Power Requirements	100-240V AC, 50/60Hz
Power Consumption	0.4 W in Eco Standby mode, up to 423 W
Heat	up to 1,443 BTU/hr
Security Facilities	Kensington® Security Slot
UPC - LC-XL100A	4571194676051
UPC - LC-XL100AL	4571194676174
User Maintenance	Replace Filter Cartridge, Replace Lamp
Limited Warranty: to the original end use customer only	
Projector:	*3 years / 6000 hours
Lamp:	*6 month ownership / 500 hours use *(whichever occurs first)



LC-XL100A - XGA • 3LCD "Conference" Projector.



Here's everything you need to connect and project.



Quick lens change.




Range of wide-angle and telephoto lenses.



Easy lamp change.



Replaceable air filter cartridge.



Remote control.

INCLUDED ACCESSORIES:

Quick Start Guide, Owner's Manual on CD-ROM, VGA Computer Input Cable (Dsub15 to Dsub15), 10 ft (3 m) Detachable Power Cord, Wireless Remote Control (with 2 AAA Batteries), Network Software on CD-ROM, Lens Cover, USB Cable for Computer Mouse Control.

OPTIONAL ACCESSORIES:

Replacement Lamp, Wideangle, Midrange and Telephoto Lenses, ATA-Style Shipping Case with Wheel and Telescoping Handle, PiNet Network Interface, Ceiling Mount, Ceiling Post and Plate.

Talk to your EIKI Dealer... the "pro" in projectors.

Distributor:



www.techni-lux.com
Phone: 407-857-8770
Fax: 407-857-8771
Email: sales@techni-lux.com



2,600/3,000 ANSI Lumens • 3LCD

LC-XIP2610/LC-WIP3000

XGA/WXGA Short Throw "Interactive" Projector



LC-XIP2610 shown.

Combining rich color 3LCD imaging technology, XGA or WXGA resolution, and a short throw optical system, here's a Classroom or Meeting Room projector that delivers maximum picture in minimum space, with **interactive** white board features.



LC-XIP2610 – 2,600 ANSI Lumens • XGA (1024 x 768) projector.

LC-WIP3000 – 3,000 ANSI Lumens • WXGA (1280 x 800) projector.



EIKI
Projectors... and more!



Interactive features requires Win. XP/Vista/7 (32/64-bit). Long life lamp, up-to 5,000 hours.



Remote control.

Key Features:

- △ Full interactive screen functions on any flat surface.
- △ Interactive function permits real-time annotation of projected image.
- △ Pen & pointer function as both writing instruments & computer mouse.
- △ Works with most common mouse controlled software.
- △ Quick calibration setup with adjustable image size from 50" to 110" diagonal.
- △ Ultra-short throw lens for minimal instructor interference.
- △ 2,600/3000 ANSI lumens, 85% uniformity and 500:1 contrast ratio.
- △ Native XGA/WXGA resolution. Compatible with inputs up-to UXGA & WSXGA+.
- △ Supports analog and digital video input in all color standards up-to 1080p.
- △ 3 panel LCD imaging delivers a rich, color saturated picture.
- △ 8-bit color processing yields a 16.7 million color palette.
- △ Long lamp life: up-to 5,000 hours.
- △ PC & Mac compatible.
- △ Kensington® security slot, PIN code and key lock options.
- △ 3 year projector warranty.




Just connect and project.



Side-accessed long life air filter.




Side-accessed long life lamp.





Optional wall mount.

Optional ceiling mount.

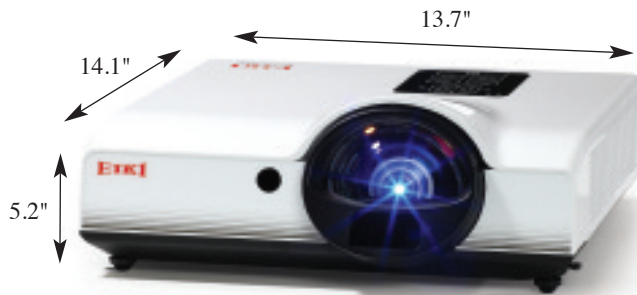

LC-XIP2610 – 2,600 ANSI Lumens • XGA (1024x768) projector.
LC-WIP3000 – 3,000 ANSI Lumens • WXGA (1280x800) projector.

PROJECTION DISTANCE

SCREEN SIZE	LC-XIP2610	LC-WIP3000
50 inches dia.	0.61 m (2.00 ft)	0.65 m (2.13 ft)
60 inches dia.	0.74 m (2.43 ft)	0.79 m (2.59 ft)
70 inches dia.	0.87 m (2.85 ft)	0.92 m (3.01 ft)
80 inches dia.	1.00 m (3.28 ft)	1.06 m (3.48 ft)
90 inches dia.	1.13 m (3.71 ft)	1.20 m (3.94 ft)
100 inches dia.	1.26 m (4.13 ft)	1.34 m (4.39 ft)
110 inches dia.	1.39 m (4.56 ft)	—



Pen and pointer.

INCLUDED ACCESSORIES:

Quick Start Guide. Owner's Manual on CD-ROM. Power Cord. Network Software on CD-ROM. VGA Computer Input Cable (Dsub15 to Dsub15). Wireless Remote Control (with 2 AAA Batteries). Lens Cover. USB Cable.

INTERACTIVE ACCESSORIES:

Black Baton. Black Light Pen. 2AAA Batteries. 2 AA Batteries. Soft Bag for Accessories.

OPTIONAL ACCESSORIES:

Replacement Lamp. Replacement Air Filter. Ceiling Mount Post & Plate.



LC-XIP2610



LC-WIP3000

Full complement of connections, including network control.

Present and write. Choose your format.



Interactive function permits real-time annotation on projected image. Pen and Pointer function as both writing instruments and computer mouse.



Simple and user-friendly interactive function makes it easy for you to handwrite and draw anything on screen.

LC-XIP2610 SPECIFICATIONS:

LC-WIP3000 SPECIFICATIONS:

Brightness	up-to 2,600 ANSI Lumens
Contrast Ratio	up-to 500:1
Illumination Uniformity (corner to center)	85%
Resolution and Aspect Ratio	XGA (1024x768), 4:3
Color Reproduction	8-bit (16.7 million colors)
Projection Lamp	210 watts UHP
Estimated Lamp Life	up-to 5,000 hours
Imaging System	0.63 in (16 mm) LCD Panels x 3
Total Pixels	2,359,296 ((1024 x 768) x 3)
Scanning Frequency	Auto: H: 31 ~ 92 kHz; V: 48 ~ 120 Hz
Pixel Clock	up-to 162 MHz
Lens	Attached - Fixed FL, Manual Focus
Lens Specs	Speed: f: 1.8; FL: 0.322 in (8.2 mm)
Lens Ratio	Throw:Width: 0.61:1
Image Diagonal	60 ~ 110 in (152 ~ 279 cm)
Image Width	3.3 ~ 7.3 ft (1.0 ~ 2.2 m)
Throw Distance	2.1 ~ 3.9 ft (0.61 ~ 1.390 m)
Projector Elevation Adjustment (legs)	up-to 7° Up
Maximum Pitch	up-to 360°
Vertical Lens Shift (% of image height)	Fixed: 110% Up
Vertical Keystone Correction	Digital: up-to 30° Up or Down
Image Orientation	Normal, Reversed, Inverted
Mouse Control	USB Type B x1
Local Control / Power Management	Full Function / Auto Shutdown
RS232 Control Port	Dsub9 x 1
Remote Projector Control	Wireless (Infra Red) x 1
LAN Port	RJ45 x 1
Computer Input in Pixels	up-to 1600 x 1200 (4:3), 1680 x 1050 (16:10)
Analog 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
Analog Wide Inputs	WSXGA+, WXGA+, WXGA
Digital 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
Digital Wide Inputs	WSXGA+, WXGA+, WXGA
Video Formats	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
Image Signal Resizing	Smart Scaling Technology
Video Input Analog	480i/p, 575i/p, 720p, 1035i, 1080i
Video Input Digital	480p, 575p, 720p, 1035i, 1080i/p
Image Signal Inputs	
1. Analog Computer	Dsub15 x 1
2. Digital with HDCP	DVI-I x 1
3. Component Video	RCA x 3
4. S-Video	S-Video x 1
5. Composite Video	RCA x 1
Audio Signal Inputs	
For Computer Inputs	Stereo: MiniStereo x 2
For Video Inputs	Stereo: RCA x 2
Outputs	
Computer Monitor	Dsub15 x 1
Audio Output	Variable, Stereo: MiniStereo x 1
Amplifier	8 watts
Speaker	2 in (5 cm) x 1 (Mono)
Fan Noise	as low as 33.5 dBA
Cabinet Size (HxWxD)	5.2 x 13.7 x 14.1 in (132 x 348 x 360 mm) (excluding legs)
Weight	9 lb (4.1 kg)
Packaged Size (HxWxD)	9.2 x 18.2 x 19 in (233 x 464 x 481 mm)
Packaged Weight	14.3 lb (6.5 kg)
Power Requirements	100 ~ 120 VAC, 50/60 Hz
Power Consumption	230 watts (Eco mode) up-to 295 watts (Normal)
Heat	785 BTU/hr (Eco mode) up-to 1007 BTU/hr (Normal)
Power Cord	6' (1.8M), IEC Type C13, Detachable
Electrical Safety Compliance	UL, cUL, IEC
Electromagnetic Compatibility	FCC Class B, CE Mark
Security Facilities	Kensington® Security Slot, PIN Code and Key Locks
Operating Temperature	41 ~ 95°F (5 ~ 35°C)
User Maintenance	User clean Filter, Change Lamp
Limited Warranty: to the original end-use customer only	
Projector	3 years
Lamp	6 months ownership / 500 hrs use (which ever occurs first)

Brightness	up-to 3,000 ANSI Lumens
Contrast Ratio	up-to 500:1
Illumination Uniformity (corner to center)	85%
Resolution and Aspect Ratio	WXGA (1280 x 800), 16:10
Color Reproduction	8-bit (16.7 million colors)
Projection Lamp	245 watts UHP
Estimated Lamp Life	up-to 5,000 hours
Imaging System	0.59 in (16 mm) LCD Panels x 3
Total Pixels	3,072,000 ((1280 x 800) x 3)
Scanning Frequency	Auto: H: 31 ~ 92 kHz; V: 48 ~ 120 Hz
Pixel Clock	up-to 162 MHz
Lens	Attached - Fixed FL, Manual Focus
Lens Specs	Speed: f: 1.8; FL: 0.322 in (8.2 mm)
Lens Ratio	Throw:Width: 0.61:1
Image Diagonal	60 ~ 110 in (152 ~ 279 cm)
Image Width	3.3 ~ 7.3 ft (1.0 ~ 2.2 m)
Throw Distance	2.1 ~ 4.4 ft (0.65 ~ 1.34 m)
Projector Elevation Adjustment (legs)	up-to 7° Up
Maximum Pitch	up-to 360°
Vertical Lens Shift (% of image height)	Fixed: 122% Up
Vertical Keystone Correction	Digital: up-to 30° Up or Down
Image Orientation	Normal, Reversed, Inverted
Mouse Control	USB Type B x1
Local Control / Power Management	Full Function / Auto Shutdown
RS232 Control Port	Dsub9 x 1
Remote Projector Control	Wireless (Infra Red) x 1
LAN Port	RJ45 x 1
Computer Input in Pixels	up-to 1600 x 1200 (4:3), 1680 x 1050 (16:10)
Analog 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
Analog Wide Inputs	WSXGA+, WXGA+, WXGA
Digital 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
Digital Wide Inputs	WSXGA+, WXGA+, WXGA
Video Formats	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
Image Signal Resizing	Smart Scaling Technology
Video Input Analog	480i/p, 575i/p, 720p, 1035i, 1080i
Video Input Digital	480p, 575p, 720p, 1035i, 1080i/p
Image Signal Inputs	
1. Analog Computer	Dsub15 x 1
2. Digital with HDCP	HDMI x 1
3. Component Video	RCA x 3
4. S-Video	S-Video x 1
5. Composite Video	RCA x 1
Audio Signal Inputs	
For Computer Inputs	Stereo: MiniStereo x 2
For Video Inputs	Stereo: RCA x 2
Outputs	
Computer Monitor	Dsub15 x 1
Audio Output	Variable, Stereo: MiniStereo x 1
Amplifier	8 watts
Speaker	2 in (5 cm) x 1 (Mono)
Fan Noise	as low as 33.5 dBA
Cabinet Size (HxWxD)	5.2 x 13.7 x 14.1 in (132 x 348 x 360 mm) (excluding legs)
Weight	9 lb (4.1 kg)
Packaged Size (HxWxD)	9.2 x 18.2 x 19 in (233 x 464 x 481 mm)
Packaged Weight	14.3 lb (6.5 kg)
Power Requirements	100 ~ 120 VAC, 50/60 Hz
Power Consumption	235 watts (Eco mode) up-to 310 watts (Normal)
Heat	802 BTU/hr (Eco mode) up-to 1058 BTU/hr (Normal)
Power Cord	6' (1.8M), IEC Type C13, Detachable
Electrical Safety Compliance	UL, cUL, IEC
Electromagnetic Compatibility	FCC Class B, CE Mark
Security Facilities	Kensington® Security Slot, PIN Code and Key Locks
Operating Temperature	41 ~ 95°F (5 ~ 35°C)
User Maintenance	User clean Filter, Change Lamp
Limited Warranty: to the original end-use customer only	
Projector	3 years
Lamp	6 months ownership / 500 hrs use (which ever occurs first)

Distributor:



Phone: 407-857-8770
 Fax: 407-857-8771
 Email: sales@techni-lux.com



Projectors... and more!

www.eiki.com

LC-XB43N

4,500 ANSI Lumens • XGA • 3LCD

Easy Wireless LAN Setup.
Inorganic LCD Panels yield higher contrast.
Horizontal and Corner Keystone Correction.
Wireless Content Delivery up-to 802.11n.



Key Features:

- ◆ 4,500 ANSI Lumens bright, with 85% uniformity and a 1000:1 contrast ratio.
- ◆ Weighs less than 8 lb! Compact and lightweight design.
- ◆ 3 panel LCD imaging for rich, color saturated computer and video projection.
- ◆ Native XGA resolution. Compatible with input resolutions up-to UXGA & WUXGA.
- ◆ Compatible with Normal and Widescreen video inputs up-to 1080p.
- ◆ Smart data compression / expansion, and video scaling.
- ◆ Convenient midrange (1.6:1) manual zoom and focus lens.
- ◆ Two Dsub 15 computer inputs. Switchable monitor output.
- ◆ Quiet operation: fan noise as low as 30 dBA.
- ◆ Fixed image offset. Automatic vertical digital keystone correction.
- ◆ Corner Keystone Correction. Closed Caption decoding (NTSC).
- ◆ Accepts Composite, Component, and S-Video in all major standards.
- ◆ Displays both 4:3 and 16:9 aspect ratios. Supports most HDTV resolutions.
- ◆ Variable Power Management option. Optional local or remote keylock.
- ◆ 3 year¹ / 6,000 Hrs Use* projector warranty!

Summary:

1. High brightness and contrast, with up-to 3000 hours est. lamp life.
2. Two computer inputs **plus** one computer monitor output.
3. Project straight up or down: projector supports pitch through 360°.
4. UXGA & WXGA compatible. Interlace to Progressive conversion.
5. Turn ON and Show! (Countdown can be skipped.)
6. Turn Off and Go! (A/C cord can be removed immediately.)
7. Wired LAN (RJ45) for network monitoring and control.
8. Energy Saving: reduced power consumption in Standby Eco mode.

EIKI
Projectors... and more!

LC-XB43N SPECIFICATIONS

Brightness	up-to 4,500 ANSI Lumens
Contrast Ratio	up-to 1000:1
Illumination Uniformity (corner to center)	85%
Resolution and Aspect Ratio	XGA (1024x768), 4x3
Color Reproduction	8-bit (Analog Signal) 10-bit (Digital Signal)
Projection Lamp	275 Watts NSHA
Estimated Lamp Life	up-to 3,000 Hours
Imaging System	0.8 in (20 mm) Inorganic PolySilicon active matrix TFT Panels x 3
Total Pixels	2,359,296 ((1024x768) x 3)
Scanning Frequency	Auto: H: 15 - 100 kHz; V: 50 - 100 Hz
Pixel Clock	140 MHz (Analog) 170 MHz (Digital)
Lens	Attached - Manual Zoom and Focus
Lens Specs	Speed: 1.7~2.5; FL: 0.756~1.189 in (19.2~30.2 mm)
Lens Ratios	Zoom Max:Min: 1.6:1; Throw:Width 1.15~1.85:1
Image Diagonal	40~300 in (102~762 cm)
Image Width	2.2~20 ft (0.67~6.2 m)
Throw Distance (Wide Tele)	3.0~37.7 ft (0.93~11.5 m)
Projector Elevation Adjustment (legs)	up-to 8.9° Up
Maximum Pitch	up-to 360°
Vertical Lens Shift (% of image height)	Fixed: 40% Up
Vertical Keystone Correction	Digital: up-to 40° Up or Down
Horiz. Keystone Correction	Digital: up-to 30° Left or Right
Image Orientation	Normal, Reversed, Inverted
Local Control / Power Management	Full Function / Auto Shutdown
RS232 Control Port	Dsub9 x 1
Remote Projector Control	Wireless/Wired x 1 w/ Laser Pointer
Wired Remote Control Port	MiniStereo x 1
LAN Port	RJ45 x 1
Mouse Port	USB-B x 1
Computer Input Pixel Range	1920x1200~640x480
Computer In 4x3 analog	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
Computer In Wide analog	WUXGA, WSXGA+, WXGA+, WXGA
Computer In 4x3 digital	UXGA, SXGA+, SXGA, XGA, SVGA, VGA
Computer In Wide digital	WUXGA, WSXGA+, WXGA+, WXGA
Video Formats	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
Video In Analog	480i/p, 575i/p, 720p, 1035i, 1080i
Image Signal Resizing	Smart Scaling Technology
Video In Analog	480i/p, 575i/p, 720p, 1035i, 1080i
Video In Digital	480i/p, 575i/p, 720p, 1035i, 1080i/p
Image Signal Inputs:	
1. Analog Computer	Dsub15 x 1
Component Video (with optional adapter), 3RCA	
2. Analog or Digital with HDCP	DVH x 1
3. S-Video	S-Video x 1
4. Composite Video	RCA x 1
5. Computerless slideshows and videos	USB x 1
Audio Signal Inputs:	
For Inputs 1 & 2 (one jack each)	Stereo: MiniStereo x 2
For Inputs 3 & 4	Stereo: RCA x 2
Outputs:	
Computer Monitor	Dsub15 x 1
Audio Output	Variable, Stereo: MiniStereo x 1
Amplifier	Mono: 1 Watt
Speaker	1.1 in (2.8 cm) x 1 (Mono)
Fan Noise	as low as 30 dBA
Cabinet Size (HxWxD)	3.07 x 13.15 x 10.3 in (7.8 x 33.4 x 26.2 cm) (excluding legs)
Weight	7.7 lb (3.5 kg)
Packaged Size (HxWxD)	10.0 x 16.1 x 14.8 in (25.5 x 40.8 x 37.7 cm)
Packaged Weight	13.7 lb (6.2 kg)
Power Requirements	100 - 240V AC, 50/60 Hz
Power Consumption	0.5 W in Eco Standby mode, up-to 364 W
Heat	1.8 BTU/hr (1.9 kJ/hr) in Eco Standby mode, up-to 1242 BTU/hr (1310 kJ/hr)
Power Cord	10 ft (3 m) IEC Type C13, Detachable
Electrical Safety Compliance	IEC / UL / cUL
Electromagnetic Compatibility	FCC Class B, CE Mark
Security Facilities	Kensington® Security Slot
Operating Temperature	41 - 104°F (5 - 35°C)
User Maintenance	Clean Air Filter, Change Lamp
UPC	4571194673340

Limited Warranty: to the original end-user customer only

¹Projector 3 Years / 6,000 Hrs Use* (Parts and labor to correct defects)

Lamp 90 Days / 500 Hrs Use* (Failed lamp replaced pro-rata)

* whichever occurs first

Easy Wireless LAN Setup.
Inorganic LCD panels yield higher contrast.
Horizontal and Corner Keystone Correction.




LC-XB43N • XGA • 3LCD



Remote control.



Ready to connect and project.



INCLUDED ACCESSORIES:

Quick Start Guide. Owner's Manual on CD-ROM. AC Power Cord. VGA-type Computer Input Cable (Dsub15 ~ Dsub15). Wireless Remote Control & Batteries (AAAx2). Network Software on CD-ROM. USB Thumb Drive. Soft Carry Bag.

OPTIONAL ACCESSORIES:

Replacement Lamp. Component Video Input Cable (Dsub15~3-RCA). Ceiling Mount. Ceiling Post and Plate

EIKI® is a registered trademark of Eiki International, Inc.
HDMI® is a registered trademark of HDMI Licensing LLC.
Kensington® and MicroSaver® are registered trademarks of ACCO Brands Corporation.

Specifications subject to change without notice.

©2011 Eiki International, Inc. Printed in the USA. 04/06/11

EIKI
Projectors... and more!

Distributor:

Techni-Lux
www.techni-lux.com

Phone: 407-857-8770

Fax: 407-857-8771

Email: sales@techni-lux.com

LC-XB43



**4,500 Lumens • XGA • 3LCD
"Brilliant" Series Projector**

**Wired LAN (RJ45) Connection
High Contrast, Durable Inorganic LCD Panels
Vertical, Horizontal and Corner Keystone Correction**

Get the rich color imaging of 3-panel LCD technology in a compact, lightweight projector. More than bright ... it's Brilliant!

Key Features

- ◆ 4,500 ANSI Lumens, 85% uniformity, and 1000:1 contrast ratio.
- ◆ Native XGA resolution. Compatible with inputs up-to UXGA and WUXGA.
- ◆ Supports analog video inputs in all color standards up-to 1080i.
- ◆ Durable inorganic 3-panel LCD imaging engine with a high contrast ratio.
- ◆ 8-bit color processing yields a 16.7 million color palette.
- ◆ Convenient midrange (1.6:1) manual zoom and focus lens.
- ◆ Fixed image offset. Automatic vertical & horizontal digital keystone correction.
- ◆ Accepts Composite, Component, and S-Video in all major standards.
- ◆ Two Dsub15 computer inputs, plus one Dsub15 computer monitor output.
- ◆ Built-in wired LAN connection for projector monitoring and control.
- ◆ Built-in 1 Watt amplifier and speaker system. Closed Caption decoding.
- ◆ Variable power management option.
- ◆ Kensington® security slot. Optional Local or Remote keylock.
- ◆ Color board modes. Auto input search. Auto setup. 16x digital zoom.
- ◆ 3 year/6000 Hours (whichever comes first) projector warranty.

Bright enough for use in conference rooms and lecture theaters with the lights on, the EIKI LC-XB43 is among our brightest attached lens projectors. A cost-effective ultraportable, the LC-XB43 offers high contrast inorganic 3LCD imaging and great analog connectivity. For digital connections and wired/wireless network control and content delivery, consider the XGA LC-XB43N or WXGA/720p LC-WB42NA.



EIKI
Projectors... and more!

SPECIFICATIONS:

Brightness	up to 4,500 ANSI Lumens
Contrast Ratio	up to 1000:1
Illumination Uniformity (corner to center)	85%
Resolution and Aspect Ratio	XGA (1024x768), 4x3
Color Reproduction	8-bit (16.7 million colors)
Projection Lamp	275 Watts NSHA
Estimated Lamp Life	up to 3,000 Hours
Imaging System	0.8 in (20 mm) Inorganic LCD Panels x 3
Total Pixels	2,359,296 ((1024x768) x 3)
Scanning Frequency	Auto: H: 15~100 kHz, V: 50~100 Hz
Pixel Clock	up to 140 MHz
Lens	Attached - Manual Zoom and Focus
Lens Specs	Speed: f: 1.7~2.5; FL: 0.75~1.19 in (19.2~30.2 mm)
Lens Ratios	Zoom Max:Min 1.6:1; Throw:Width 1.15~1.85:1
Image Diagonal	40~300 in (102~762 cm)
Image Width	2.2~20 ft (0.67~6.1 m)
Throw Distance	3~37.7 ft (0.93~11.5 m)
Projector elevation adjustment (legs)	up to 8.9°
Up Maximum Pitch	up to 360°
Vertical Lens Shift (% of image height)	Fixed: 40% Up
Vertical Keystone Correction	Digital: up to 40° Up or Down
Horizontal Keystone Correction	Digital: up to 30° Left or Right
Corner Keystone Correction	Digital: range depends on input signal
Image Orientation	Normal, Reversed, Inverted
Local Control / Power Management	Full Function / Auto Shutdown
RS232 Control Port	Dsub9 x 1
Remote Projector Control	Wireless (Infra Red) x 1
LAN Port	RJ45 x 1
Computer Input in Pixels	up to 1600x1200 (4:3), 1920x1200 (16:10)
Analog 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
Analog Wide Inputs	WUXGA, WSXGA+, WXGA+, WXGA
Video Formats	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
Image Signal Resizing	Smart Scaling Technology
Video Inputs Analog	480i/p, 575i/p, 720p, 1035i, 1080i
Image Signal Inputs	
1. Computer 1	Dsub15 x 1
Component Video (with optional adapter, RCA x 3)	
2. Computer 2:	Dsub15 x 1
3. Composite Video	RCA x 1
4. S-Video:	S-Video x 1
Audio Signal Inputs	
Computer & Component Inputs	Stereo: MiniStereo x 2
S-Video and Composite Inputs	Stereo: RCA x 2
Outputs	
Computer Monitor:	Dsub15 x 1
Audio Output	Variable, Stereo: MiniStereo x 1
Amplifier	Stereo: 1 Watt
Speaker:	1.1 in (2.8 cm) x 1 Mono
Fan Noise	as low as 30 dBA
Cabinet Size (HxWxD)	3.07 x 13.15 x 10.3 in (7.8 x 33.4 x 26.2 mm) (excluding legs)
Weight	7.7 lb (3.5 kg)
Packaged Size (HxWxD)	10.0 x 16.1 x 14.8 in (25.4 x 40.8 x 37.5 mm)
Packaged Weight	13.6 lb (6.2 kg)
Power Requirements	100-240V AC, 50/60Hz
Power Consumption	0.5 W in Eco Standby mode, up to 354 W
Heat	1.7 BTU/hr in Eco Standby mode, up to 1,208 BTU/hr
Power Cord	10 ft (3 m) Type C13, Detachable
Electrical Safety Compliance	UL, cUL, CE
Electromagnetic Compatibility	FCC Class B, CE
Security Facilities	Kensington® Security Slot
Operating Temperature	41~104°F (5~40°C)
User Maintenance	Clean Air Filter, Replace Lamp
UPC	4571194673968
Limited Warranty: to the original end-use customer only	
Projector:	3 Years / 6000 hours use (whichever occurs first)
Lamp:	6 months ownership / 500 hours use (whichever occurs first)

EIKI® is a registered trademark of Eiki International, Inc.




LC-XB43 - XGA • 3LCD "Brilliant" Series.



Just connect and project.



Local control



Remote control.



INCLUDED ACCESSORIES:

Quick Start Guide. Owner's Manual on CD-ROM. Power Cord. VGA Computer Input Cable (Dsub15~Dsub15). Wireless Remote Control (with 2 AAA Batteries), Network Software on CD-ROM. Soft Carry Bag.

OPTIONAL ACCESSORIES:

Replacement Lamp. VGA Component Cable (Dsub15~3-RCA). Ceiling Mount. Ceiling Post and Plate.

Distributor:



www.techni-lux.com
Phone: 407-857-8770
Fax: 407-857-8771
Email: sales@techni-lux.com



Here's breathtaking color reproduction, with stunning contrast and color purity, at a remarkable new level of brightness.

LC-X800A

Key Features

- ◆ 12,000 ANSI lumens* bright with 90% uniformity and a 4000:1 contrast ratio.
- ◆ Native XGA resolution. Compatible with inputs up-to UXGA and WUXGA.
- ◆ Supports analog and digital video input in all color standards up-to 1080p.
- ◆ Durable inorganic 3-panel LCD imaging engine with a high contrast ratio.
- ◆ 10-bit color processing. 3LCD+One imaging expands color richness.
- ◆ Supplied without lens. Range of power zoom and focus lenses available.
- ◆ Vertical and horizontal power lens shift and digital keystone correction.
- ◆ Includes a full set of analog and digital computer and video inputs.
- ◆ Optional input modules are available for customization, including dual SDI.
- ◆ Optional network interface module for browser-based projection management.
- ◆ Self-advancing cartridge air filter reduces maintenance: up-to 11,000 hours life.
- ◆ Power lens shift travels down as well as up, making inversion unnecessary.
- ◆ Mechanical shutter for true black screen in "No Show" mode.
- ◆ Includes wireless/wired remote control.
- ◆ 3 year projector warranty.



**12,000 Lumens • XGA • 3LCD+One
Powerhouse Projector**

**Improved Dual Lamp Technology
Vivid Colors with 3LCD+One Imaging
High Contrast Durable Inorganic LCD Panels**

Our brightest projector to operate on "household" current, the EIKI® LC-X800A sports the same optical and input configuration features that have made Powerhouse series projectors legendary for large venue applications. New with the LC-X800A, 3LCD+One imaging adds discrete yellow control to high contrast inorganic imaging, for vivid color.

*Shown with
Optional Lens*



EIKI
Projectors... and more!

*Note: with AH-22051 lens

SPECIFICATIONS:

Brightness up to 12,000 ANSI Lumens (with AH-22051 lens)
 Contrast Ratio up to 4000:1
 Illumination Uniformity (corner to center) 90%
 Resolution and Aspect Ratio XGA (1024x768), 4x3
 Color Reproduction 10-bit (1.07 billion colors)
 Projection Lamp 330 Watts NSHA x 2
 Estimated Lamp Life up to 3,000 Hours
 Imaging System 1.8 in (46 mm) Inorganic PolySilicon active matrix TFT Panels x 3
 with proprietary Color Control Device (3LCD+One)
 Total Pixels 2,359,296 ((1024x768) x 3)
 Scanning Frequency Auto: 15-120 kHz; 48-120 Hz
 Pixel Clock up to 230 MHz
 Lens Changeable - Does not come with Lens
 Image Diagonal up to 600 in (1,524 cm)
 Image Width up to 40 ft (12.2 m)
 Throw Distance (Wide-Tele) See specifications of selected lens
 Projector Elevation Adjustment (legs) up to 2.8 Up or Down
 Maximum Pitch up to 360°
 Vertical Lens Shift (% of image height) up to 50% Up or Down
 Horizontal Lens Shift (% of image height) up to 10% Left or Right
 Vertical Keystone Correction Digital: up to 40° Up or Down
 Horizontal Keystone Correction Digital: up to 20° Left or Right
 Image Orientation Normal, Reversed, Inverted
 Local Control / Power Management Full Function / Auto Lamp Shut-Off
 RS232 Control Ports (In & Out) Dsub9 x 2
 Remote Projector Control Wireless/Wired x 1
 Wired Remote Control Port MiniStereo x 1
 Service Port USB-B x 1
 Computer Input in Pixels up to 1600x1200 (4:3), 1920x1200 (16:10)
 Analog 4x3 Inputs UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
 Analog Wide Inputs WUXGA, WSXGA, WXGA
 Digital 4x3 Inputs SXGA+, SXGA, XGA, SVGA, VGA
 Digital Wide Inputs WSXGA+, WXGA+, WXGA
 Video Formats NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
 Video Input Analog 480i/p, 575i/p, 720p, 1035i, 1080i
 Video Input Digital 480p, 575p, 720p, 1035i, 1080i/p
 Image Signal Resizing Smart Scaling Technology
 Image Signal Inputs:
 1a. Analog Computer Dsub15 x 1
 1b. Digital / Digital Video (w HDCP) DVID x 1
 2a. Analog Computer (RGBHV) BNC x 5
 Component Video (Y, Pb/Cb, PrCr), 3BNC
 Composite Video, 1BNC
 2b. S-Video S-VIDEO x 1
 3. Unpopulated Module Bay
 4. Unpopulated Module Bay
 Fan Noise as low as 42 dBA
 Cabinet Size (HxWxD) 10.5 x 20.8 x 29.8 in (26.8 x 53.0 x 75.5 cm)
 (excluding legs)
 Weight 60.9 lb (27.6 kg)
 Packaged Size (HxWxD) 21.3 x 33.3 x 37.4 in (54.2 x 84.6 x 95.1 cm)
 Packaged Weight 83.8 lb (38.0 kg)
 Power Requirements 100-240V AC, 50/60 Hz
 Power Consumption up to 940 Watt
 Heat up to 3,207 BTU/hr
 Power Cord 10' (3 m) Type C13, Detachable
 Electrical Safety Compliance IEC, UL, cUL
 Electromagnetic Compatibility FCC Class A, CE Mark
 Security Facilities Kensington® Security Slot
 Operating Temperature 41-104°F (5-40°C)
 User Maintenance Replace Cartridge Air Filter, Change Lamps
 UPC 4571194674101
 Limited Warranty: to the original end-use customer only
 Projector: 3 Year
 Lamp: 6 months ownership / 500 hours use (whichever occurs first)

EIKI® is a registered trademark of Eiki International, Inc.

Distributor:




Phone: 407-857-8770
 Fax: 407-857-8771
 Email: sales@techni-lux.com



LC-X800A - XGA • 3LCD+One imaging engine.



Broad selection of lenses.




3LCD+One Engine.



Remote control.



Ready to connect and project. Add Network, SDI, and more!

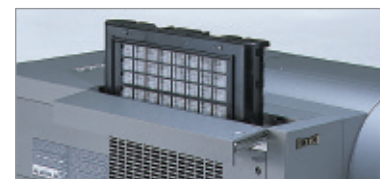

Air filter lasts up to 11,000 hours.



(Hg) Lamp Contains Mercury. Do not put in trash. Dispose-of-as Hazardous Waste, according to the laws in your jurisdiction.

INCLUDED ACCESSORIES:

Quick Start Guide, Owner's Manual on CD-ROM, Power Cord, VGA Computer Input Cable (Dsub15 to Dsub15), Wireless/Wired Remote Control (with 2 AA Batteries), Wired Remote Cable (MiniStereo-MiniStereo), Color Management Software on CD-ROM, Lens Light Block Sheets x 3, Lens Adapter x 2, Lens Spacer, Lens Mounting Clamp.

OPTIONAL ACCESSORIES:

Wideangle, Midrange and Telephoto Lenses, Replacement Lamps, Additional DVI-D & Dsub15 Input Module, Additional 5BNC/Video Input Module, DVI, Dsub15, 5BNC, and HD/SD-SDI Input Modules, ATA-Style Shipping Case with Wheels and Telescoping Handle, Ceiling Mount, Ceiling Post & Plate, Network Interface Module.



LC-X85

XGA Boardroom Projector 7000 ANSI Lumens

Get the rich color imaging of 3 panel LCD technology in an installation projector with unparalleled brightness and compatibility.

- ▼ 7000 ANSI Lumens bright, at 90%+ uniformity, and a 2200:1 contrast ratio.
- ▼ A true portable/installation projector, engineered for extended use.
- ▼ New 3LCD+ imaging system delivers more sophisticated color.
- ▼ XGA resolution. Smart data compression/expansion, and video scaling.
- ▼ Equipped with professional input configurations, including 5BNC and DVI.
- ▼ Accepts analog and digital computer input, analog and digital w/HDCP video.
- ▼ Compatible with Computer sources up to WUXGA, video sources up to 1080p.
- ▼ Power zoom and focus. V & H power lens shift. V & H keystone correction.
- ▼ Optional Wideangle and Telephoto lenses. Quick Lens Change System.
- ▼ Quiet operation: fan noise as low as 31.8 dBA. Roll air filter.
- ▼ Wireless/wired remote with mouse. Up to 49x digital zoom.
- ▼ Converts Interlace to Progressive scan. 2-3 pulldown support.
- ▼ Variable Power Management Option. Optional Local or Remote Keylock.
- ▼ Custom Warmup Screen Image Option. Built-in Color Auto Picture Control.
- ▼ 3 Year* Projector Warranty!




Breakthrough Features

1. New 3LCD+ imaging system for high brightness and color purity.
2. Our brightest portable: 7000 ANSI Lumens at 2200:1 contrast.
3. Inorganic imaging engine is optimized for extended use.
4. Self-advancing cartridge air filter reduces maintenance.
5. Horizontal lens shift and vertical projector orientation.
6. Compatibility up to WUXGA analog, 1080p(psf/24/25/30)digital.
7. NEW Mechanical Shutter for true "black screen."
8. NEW assignable audio inputs for "audio-follows-video" switching.

EIKI
Projectors... and more!

SPECIFICATIONS:

Screen Brightness	up to 7000 ANSI Lumens (with AH-23081 lens)
Illumination Uniformity	90%+
Color Reproduction	10 bit/1.07 Billion Colors
Contrast Ratio	2200:1 (Full ON/OFF)
Horizontal Resolution	800 TV Lines (HDTV)
Projection Lamp	330 Watt NSHA
Estimated Lamp Life	up to 3,000 hrs.
Imaging System	1.3" inorganic PolySilicon TFT Panels x 3 with proprietary Color Control Device (3LCD+)
Screen Pixels	1024 x 768 in stripe configuration
Total Pixels	2,359,296 ((1024 x 768) x 3)
Lens	Not Included
Image Diagonal	31~400 in. (78.8~1016 cm)
Image Width	2.07~26.7 ft. (0.63~8.2 m)
Throw Distance	See specifications of selected lens
Front Elevation	up to 6.5° up
Maximum Pitch	Unlimited: anywhere up to 360° off the horizontal axis
Projector Orientation	Normal, Inverted, Straight Up, Straight Down
Vertical Anti Keystone	Power Lens Shift, Ratio (Top:Bottom) 10:0~1:1
Horizontal Anti Keystone	Power Lens Shift, Ratio (Left:Right) 2:3~3:2
Vertical Keystone Correction	Digital: up to 40° up or down
Horizontal Keystone Correction	Digital: up to 20° left or right
Scanning Frequency	Auto: H Sync. 15-100 kHz; V Sync. 48-100 Hz
Dot Clock	180 MHz
Image Orientation	Normal, Reversed, Inverted
Local Control/Power Management	Full Function/Auto Shut-Off
Remote Projector & Mouse Ctrl	Wireless/Wired x 1
Ports:	Mouse: USB-Bx1, Control: DB9 x1, Wired RC: MiniStereo x 1
Computer Native Resolution	1024 x 768 (XGA)
Computer: Compatibility	WUXGA, & UXGA (analog only), SXGA+, WXGA, XGA, SVGA, VGA & MAC
Computer: Formats	1920x1200 through 640 x 480
Computer: Image Sizing	Normal, or Smart Compressed or Expanded
Video: System Compatibility	NTSC/PAL/SECAM/NTSC 4.43/PALM/N
Video: Compatibility	480i/p, 575i/p, 720p, 1035i, 1080i-50/60 1080psf24/25/30 (digital only)
Video: Formats Supported	4:3 and 16:9
Video: Image Resizing	Video Scaling Technology
Video: Systems	Composite, S-Video, Component (Y,Pb/Cb,Pr/Cr)
Image Signal Inputs:	
1a. either Computer:	HD15 x 1 RGB
1b. or DVI-D x 1 Digital Computer or Video Input w/ HDCP	
2a. either Computer:	BNC x 5 (RGBHV)
2b. or Video:	BNC x 3 (Composite/Component: Y,Pb/Cb,Pr/Cr)
3. Video:	RCA x 3 (Composite/Component: Y,Pb/Cb,Pr/Cr) S-Video x 1
Image Signal Outputs:	
Computer: Monitor	HD15 x 1 on Input 1 (switchable)
Audio Signal Inputs	MiniStereo x 2 (assignable)
Audio Signal Outputs	MiniStereo x 1 (variable)
Fan Noise	as low as 35 dBA
Size (HxWxD)	7.36 x 14.56 x 17.32 in. (187 x 370 x 440 mm) without lens & including height of leg (0.28in. 7 mm)
Weight	25.1 lb. (11.4 kg)
Packaged Size (HxWxD)	15.2 x 19.4 x 24.8 in. (388 x 492 x 630 mm)
Packaged Weight	35.1 lb. (15.9 kg)
Power Requirements	100-240V AC, 50/60Hz
Power Consumption/Heat:	491 W/1675 BTU/hr (422 Kcal/hr)
Power Cord	10' (3 M) Type 3, Detachable
Electrical Safety Compliance	IEC/UL/cUL
Electromagnetic Compatibility	FCC Class B, CE Mark
Security Facilities	Kensington® Security Slot
Operating Temperature	41~104°F (5~40°C)
User Maintenance	Replace Air Filter Cartridge, Replace Lamp
Warranty: (to the original end-use customer)	
Projector:	3 Years/6000 Hour Use*(Parts/Labor to Correct Defects)
Lamp:	90 Days/500 Hours Use* (Failed Lamp Replaced Pro-Rata * Whichever occurs first

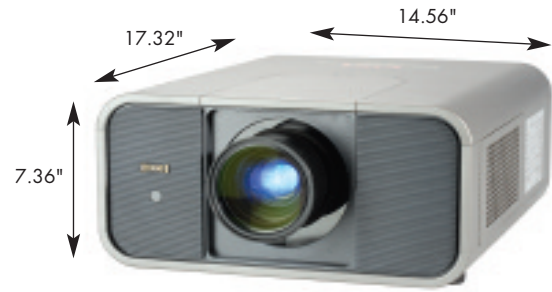

Hg Lamp Contains Mercury. Do not put in trash. Dispose-of-as Hazardous Waste, according to the laws in your jurisdiction.

INCLUDED ACCESSORIES:

Owner's Manual on CD-ROM. QuickStart Manual. AC Power Cord. VGA-type Computer Input Cable (Dsub15~Dsub15). Wireless/wired Remote with Mouse Control & 2 x AAA batteries. USB Cable for Computer Mouse control. Remote Control Cable, Lens Mount Attachment, Lens Light Block, Lens Spacer.

OPTIONAL ACCESSORIES:

Replacement Lamp. Soft Carry Bag with Wheels and Telescoping Handle. ATA-Style Shipping Case with Wheels and Telescoping Handle. A Range of Wideangle and Telephoto Lenses. Ceiling Mount. Ceiling Post and Plate. 100' (30 M) Wired Remote Cable. PiNET Network Interface. Replacement Air Filter Cartridge.

Talk to your EIKI Dealer... the "pro" in projectors.

Distributor:



Techni-Lux
www.techni-lux.com

Phone: 407-857-8770
Fax: 407-857-8771
Email: sales@techni-lux.com

Eiki International, Inc.

30251 Esperanza, Rancho Santa Margarita, CA 92688-2130

Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com

In Canada, 310 First St. Unit 2, P.O. Box 156, Midland, ON L4R 4K8

Phone: 800-563-3454, Fax: 800-567-4069 E-mail: canada@eiki.com

<http://www.eiki.com>

EIKI

Projectors... and more!

5,500 ANSI Lumens • WXGA • 3LCD

LC-WXL200A

"Conference" Series Projector



Combining large venue projection features with durable components and reduced maintenance, the EIKI LC-WXL200A comes complete with a wide-range power zoom and focus lens as standard equipment. Also available is the LC-WXL200AL now without standard lens with a variety of optional lenses to choose from.



Key Features:

- △ 5,500 ANSI lumens bright with 90% uniformity and over 2000:1 contrast ratio.
- △ Native WXGA resolution. Compatible with inputs up-to UXGA and WUXGA.
- △ Supports analog and digital video input in all color standards up-to 1080p.
- △ Durable inorganic 3-panel LCD imaging engine with high contrast ratio.
- △ 10-bit color processing, for superior color reproduction.
- △ Power zoom and focus lens. Optional wide-angle and telephoto lenses.
- △ Vertical and Horizontal power lens shift and digital corner keystone correction.
- △ Compatible with Crestron RoomView™ & AMX Device Discovery Technology.
- △ HDMI® input supports digital data, plus digital video with HDCP.
- △ Built-in 7 Watt amplifier and speaker system. Closed Caption decoding.
- △ Wired LAN connection for monitoring and control. Optional PjNet interface.
- △ Self-advancing cartridge air filter provides up-to 13,000 hours use.
- △ Centered lens with 1-button release. Top-accessed lamp, side-accessed filter.
- △ Variable power management option. Optional local or remote keylock.
- △ Mechanical shutter for true black screen.
- △ Picture-in-Picture & Picture-by-Picture. Wireless/wired remote with mouse control.
- △ 3 year projector warranty.



EIKI®
Projectors... and more!



LC-WXL200A SPECIFICATIONS:

Brightness up-to 5,500 ANSI Lumens (with AH-24741 lens)
 Contrast Ratio over 2000:1
 Illumination Uniformity 90%
 Resolution and Aspect Ratio WXGA (1280 x 800), 16:10
 Color Reproduction 10-bit (1.07 billion colors)
 Projection Lamp 330 watts NSHA
 Estimated Lamp Life up to 3,000 hours
 Total Pixels 3,072,000 (1280 x 800) x 3
 Imaging System 0.75 in (19 mm) Inorganic LCD Panels x 3
 Scanning Frequency Auto: H Sync. 15 ~ 100 kHz, V Sync. 48 ~ 100 Hz
 Pixel Clock 230 MHz Analog, 162 MHz HDMI
 Lens Changeable - Power Zoom and Focus
 Lens Specs Speed: f: 1.7 ~ 2.3; FL: 1.06 ~ 1.78 in (26.9 ~ 45.4 mm)
 Lens Ratios Zoom Max:Min: 1.7:1; Throw:Width 1.7 ~ 2.89:1
 Image Diagonal 40 ~ 400 in (102 ~ 1,016 cm)
 Image Width 2.67 ~ 26.7 ft (0.81 ~ 8.1 m)
 Throw Distance 4.6 ~ 80 ft (1.4 ~ 24.0 m)
 Projector Elevation Adjustment (legs) up-to 4° Up or Down
 Maximum Pitch up-to 360°
 Vertical Lens Shift (% of image height) up-to 60% Up or Down
 Horizontal Lens Shift (% of image width) up-to 10% Left or Right
 Vertical Keystone Correction Digital: up-to 40° Up or Down
 Horizontal Keystone Correction Digital: up-to 20° Left or Right
 Image Orientation Normal, Reversed, Inverted
 Local Control / Power Management Full Function / Auto Shutdown
 Remote Control Wireless / Wired x 1
 Wired Remote Control MiniStereo x 1
 Mouse Port USB Type B x 1
 RS-232 Control Dsub9 x 1
 LAN Port RJ45 x 1
 Optional Network Interface Port Dsub25 x 1
 Computer Input in Pixels up-to 1600 x 1200 (4:3), 1920 x 1200 (16:10)
 Analog 4x3 Inputs UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
 Analog Wide Inputs WUXGA, WSXGA, WXGA
 Digital 4x3 Inputs UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
 Digital Wide Inputs WUXGA, WSXGA+, WSXGA, WXGA+, WXGA
 Video Formats NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
 Video Input Analog 480i/p, 575i/p, 720p, 1035i, 1080i/p
 Video Input Digital 480p, 575p, 720p, 1035i, 1080i/p


Image Signal Resizing Smart Scaling Technology
 Image Signal Inputs
 1a. Analog Computer Dsub15 x 1
 1b. Digital Video w/ HDCP HDMI® x 1
 2. Analog Computer (RGBHV) BNC x 5
 Component Video, 3BNC
 Composite Video, 1BNC
 3a. Component Video RCA x 3
 Composite Video, 1RCA
 3b. S-Video S-Video x 1
 Audio Signal Inputs
 For Inputs 1 & 2 MiniStereo x 2
 For Input 3 RCA x 2 (L/R)
 Outputs
 Computer Monitor Dsub15 x 1
 Audio Output Variable, Stereo: MiniStereo x 1
 Mono: 7 Watt
 Speaker 1.46 in (3.7 cm) x 1 (Mono)
 Fan Noise as low as 31 dBA
 Cabinet Size (HxWxD) LC-WXL200A 6.46 x 19.27 x 17.12 in (16.4 x 48.9 x 43.5 cm)
 Cabinet Size (HxWxD) LC-WXL200AL 6.46 x 19.27 x 14.61 in (16.4 x 48.9 x 37.1 cm)
 Weight - LC-WXL200A 21.6 lb (9.8 kg)
 Weight - LC-WXL200AL 19.8 lb (9.0 kg)
 Packaged Cabinet Size (HxWxD) 12.5 x 26.8 x 22.9 in (31.8 x 68.1 x 58.1 cm)
 Packaged Weight - LC-WXL200A 35.0 lb (15.9 kg)
 Packaged Weight - LC-WXL200AL 33.3 lb (15.1 kg)
 Operating Temperature 41 ~ 95°F (5 ~ 35°C)
 Electrical Safety Compliance IEC / UL / cUL
 Electromagnetic Compatibility FCC Class B, CE Mark
 Power Requirements 100-240V AC, 50/60 Hz
 Power Consumption 0.4 W in Eco Standby mode, up-to 490 W
 Heat up-to 1,672 BTU/hr
 Security Facilities Kensington® Security Slot
 UPC - LC-WXL200A 4571194676112
 UPC - LC-WXL200AL 4571194676235
 User Maintenance Replace Filter Cartridge, Replace Lamp
 Limited Warranty: to the original end-use customer only
 Projector 3 years / 6000 hours (whichever occurs first)
 Lamp 6 months ownership / 500 hours use (whichever occurs first)

EIKI® is a registered trademark of EIKI International, Inc. Kensington® is a registered trademark of ACCO Brands Corporation.
 HDMI® is a registered trademark of HDMI Licensing LLC. Crestron Roomview™ is a registered trademark of Crestron Electronics, Inc.

High Contrast Durable Inorganic LCD Panels.
Cost-Effective Large Venue Performance.
Crestron RoomView™ & AMX Device Discovery Technology.



Includes a full complement of connections, including network control.



Range of wide angle and telephoto lenses.



LC-WXL200A • WXGA • 3LCD projector.
 (Dimensions shown indicate projector with standard lens).

INCLUDED ACCESSORIES:
 Quick Start Guide, Owner's Manual on CD-ROM, VGA Computer Input Cable (Dsub15 to Dsub15), 10 ft (3 m) Detachable Power Cord, Wireless Remote Control (with 2 AAA Batteries), Network Software on CD-ROM, Lens Cover, USB Cable for Computer Mouse Control.

OPTIONAL ACCESSORIES:
 Replacement Lamp, Wideangle, Midrange and Telephoto Lenses, ATA-Style Shipping Case with Wheel and Telescoping Handle, PjNet Network Interface, Ceiling Mount, Ceiling Post and Plate.



Replaceable air filter cartridge.



Easy lamp change.



Interchangeable lenses.

Specifications subject to change without notice. ©2013 EIKI International, Inc. Printed in the USA. 09/01/13

EIKI
 Projectors... and more!
 www.eiki.com

Distributor:
Techni-Lux
 www.techni-lux.com
 Phone: 407-857-8770
 Fax: 407-857-8771
 Email: sales@techni-lux.com

5,000 ANSI Lumens • WUXGA • 3LCD

LC-WUL100A

"Conference" Series Projector



Combining large venue projection features with durable components and reduced maintenance, the EIKI LC-WUL100A comes complete with a wide-range power zoom and focus lens as standard equipment. Also available is the LC-WUL100AL now without standard lens with a variety of optional lenses to choose from.



Key Features:

- △ 5,000 ANSI lumens bright with 90% uniformity and over 2000:1 contrast ratio.
- △ Native WUXGA resolution. Compatible with inputs up-to UXGA and WUXGA.
- △ Supports analog and digital video input in all color standards up-to 1080p.
- △ Durable inorganic 3-panel LCD imaging engine with high contrast ratio.
- △ 10-bit color processing, for superior color reproduction.
- △ Power zoom and focus lens. Optional wide-angle and telephoto lenses.
- △ Vertical and Horizontal power lens shift and digital corner keystone correction.
- △ Compatible with Crestron RoomView™ & AMX Device Discovery Technology.
- △ HDMI® input supports digital data, plus digital video with HDCP.
- △ Built-in 10 Watt amplifier and speaker system. Closed Caption decoding.
- △ Wired LAN connection for monitoring and control. Optional PjNet interface.
- △ Self-advancing cartridge air filter provides up-to 13,000 hours use.
- △ Centered lens with 1-button release. Top-accessed lamp, side-accessed filter.
- △ Variable power management option. Optional local or remote keylock.
- △ Mechanical shutter for true black screen.
- △ Picture-in-Picture & Picture-by-Picture. Wireless/wired remote with mouse control.
- △ 3 year projector warranty.



EIKI
Projectors... and more!



LC-WUL100A SPECIFICATIONS:

Brightness	up-to 5,000 ANSI Lumens (with AH-24741 lens)
Contrast Ratio	over 2000:1
Illumination Uniformity	90%
Resolution and Aspect Ratio	WUXGA (1900 x 1200), 16:10
Color Reproduction	10-bit (1.07 billion colors)
Projection Lamp	330 watts NSHA
Estimated Lamp Life	up to 3,000 hours
Total Pixels	6,912,000 (1900 x 1200) x 3
Imaging System	0.76 in (19 mm) Inorganic LCD Panels x 3
Scanning Frequency	Auto: H Sync. 15 ~ 100 kHz, V Sync. 48 ~ 100 Hz
Pixel Clock	230 MHz Analog, 162 MHz HDMI
Lens	Changeable - Power Zoom and Focus
Lens Specs	Speed: f: 1.7 ~ 2.3; FL: 1.06 ~ 1.78 in (26.9 ~ 45.4 mm)
Lens Ratios	Zoom Max:Min: 1.7:1; Throw:Width 1.7 ~ 2.89:1
Image Diagonal	40 ~ 400 in (102 ~ 1,016 cm)
Image Width	2.67 ~ 26.7 ft (0.81 ~ 8.1 m)
Throw Distance	4.6 ~ 80 ft (1.4 ~ 24.0 m)
Projector Elevation Adjustment (legs)	up-to 4° Up or Down
Maximum Pitch	up-to 360°
Vertical Lens Shift (% of image height)	up-to 60% Up or Down
Horizontal Lens Shift (% of image width)	up-to 10% Left or Right
Vertical Keystone Correction	Digital: up-to 40° Up or Down
Horizontal Keystone Correction	Digital: up-to 20° Left or Right
Image Orientation	Normal, Reversed, Inverted
Local Control / Power Management	Full Function / Auto Shutdown
Remote Control	Wireless / Wired x 1
Wired Remote Control	MiniStereo x 1
Mouse Port	USB Type B x 1
RS-232 Control	Dsub9 x 1
LAN Port	RJ45 x 1
Optional Network Interface Port	Dsub25 x 1
Computer Input in Pixels	up-to 1600 x 1200 (4:3), 1920 x 1200 (16:10)
Analog 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
Analog Wide Inputs	WUXGA, WSXGA, WXGA
Digital 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
Digital Wide Inputs	WUXGA, WSXGA+, WSXGA, WXGA+, WXGA
Video Formats	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
Video Input Analog	480i/p, 575i/p, 720p, 1035i, 1080i/p
Video Input Digital	480p, 575p, 720p, 1035i, 1080i/p
Image Signal Resizing	Smart Scaling Technology


Image Signal Inputs	
1a. Analog Computer	Dsub15 x 1
1b. Digital Computer / Digital Video w/ HDCP	DVI-D x 1
1c. Digital Video	HDMI® x 1
2. Analog Computer (RGBHV)	
Component Video, 3BNC	BNC x 5
Composite Video, 1BNC	
3a. Component Video	RCA x 3
Composite Video, 1RCA	
3b. S-Video	S-Video x 1
Audio Signal Inputs	
For Inputs 1 & 2	MiniStereo x 2
For Input 3	RCA x 2 (L/R)
Outputs	
Computer Monitor	Dsub15 x 1
Audio Output	Variable, Stereo: MiniStereo x 1
Amplifier	Mono: 10 Watt
Speaker	1.46 in (3.7 cm) x 1 (Mono)
Fan Noise	as low as 29 dBA
Cabinet Size (HxWxD) LC-WUL100A	6.46 x 19.27 x 17.12 in (16.4 x 48.9 x 43.5 cm)
Cabinet Size (HxWxD) LC-WUL100AL	6.46 x 19.27 x 14.61 in (16.4 x 48.9 x 37.1 cm)
Weight - LC-WUL100A	21.6 lb (9.8 kg)
Weight - LC-WUL100AL	35.0 lb (15.9 kg)
Packaged Cabinet Size (HxWxD)	12.5 x 26.8 x 22.9 in (31.8 x 68.1 x 58.1 cm)
Packaged Weight - LC-WUL100A	35.0 lb (15.9 kg)
Packaged Weight - LC-WUL100AL	33.3 lb (15.1 kg)
Operating Temperature	41 ~ 95°F (5 ~ 35°C)
Electrical Safety Compliance	IEC / UL / cUL
Electromagnetic Compatibility	FCC Class B, CE Mark
Power Requirements	100-240V AC, 50/60 Hz
Power Consumption	0.4 W in Eco Standby mode, up-to 519 W
Heat	up-to 1,771 BTU/hr
Security Facilities	Kensington® Security Slot
UPC - LC-WUL100A	4571194676143
UPC - LC-WUL100AL	4571194676266
User Maintenance	Replace Filter Cartridge, Replace Lamp
Limited Warranty: to the original end-use customer only	
Projector	3 years / 6000 hours (whichever occurs first)
Lamp	6 months ownership / 500 hours use (whichever occurs first)

EIKI® is a registered trademark of EIKI International, Inc. Kensington® is a registered trademark of ACCO Brands Corporation. HDMI® is a registered trademark of HDMI Licensing LLC. Crestron Roomview™ is a registered trademark of Crestron Electronics, Inc.

High Contrast Durable Inorganic LCD Panels.
Cost-Effective Large Venue Performance.
Crestron RoomView™ & AMX Device Discovery Technology.



Includes a full complement of connections, including network control.



LC-WUL100A • WUXGA • 3LCD projector.
 (Dimensions shown indicate projector with standard lens).

INCLUDED ACCESSORIES:

Quick Start Guide, Owner's Manual on CD-ROM, VGA Computer Input Cable (Dsub15 to Dsub15), 10 ft (3 m) Detachable Power Cord, Wireless Remote Control (with 2 AAA Batteries), Network Software on CD-ROM, Lens Cover, USB Cable for Computer Mouse Control.

OPTIONAL ACCESSORIES:

Replacement Lamp, Wideangle, Midrange and Telephoto Lenses, ATA-Style Shipping Case with Wheel and Telescoping Handle, PjNet Network Interface, Ceiling Mount, Ceiling Post and Plate.



Air filter lasts up-to 13,000 hours.



Easy lamp change.



Broad selection of lenses.

Specifications subject to change without notice. ©2013 EIKI International, Inc. Printed in the USA. 09/01/13

EIKI
 Projectors... and more!
 www.eiki.com

Distributor:

Techni-Lux
 www.techni-lux.com

Phone: 407-857-8770
 Fax: 407-857-8771
 Email: sales@techni-lux.com

3,000 ANSI Lumens • WXGA • 3LCD

LC-WAU200

"Short-Throw" Series Projector



Excellent choice for Classrooms or Conference Rooms!




Key Features:

- △ 3,000 ANSI lumens bright with 80% uniformity and a 3000:1 contrast ratio.
- △ Native WXGA resolution. Compatible with inputs up-to UXGA and WUXGA.
- △ Supports analog and digital video input in all color standards up-to 1080p.
- △ HDMI Digital connectivity with HDCP compliance.
- △ Fixed Short Throw Lens with Manual Focus.
- △ Fixed image offset. Automatic vertical digital keystone correction.
- △ Accepts composite, component, and S-Video in all major standards.
- △ Displays both 4:3 and 16:9 aspect ratios. Supports most HDTV resolutions.
- △ Built-in 7 Watt sound system. Closed Caption decoding (NTSC).
- △ Wired network control.
- △ Side-accessed air filter & top accessed lamp for ease of maintenance.
- △ Color board modes. Custom warm-up screen.
- △ Auto input selection. Built-in Test Patterns.
- △ Security bar. Kensington® MicroSaver® security slot. PIN lock.
- △ 3 year projector warranty.



EIKI®
Projectors... and more!



LC-WAU200 SPECIFICATIONS:


Brightness 3,000 ANSI Lumens
 Contrast Ratio 3,000:1
 Illumination Uniformity 80%
 Resolution and Aspect Ratio WXGA (1280 x 800), 16:10
 Color Reproduction 24-bit (16.7 million colors)
 Projection Lamp 230 Watts UHP
 Estimated Lamp Life (Normal / Eco) 3,000 / 5,000 Hours
 Total Pixels 3,072,000 (1280 x 800) x 3
 Imaging System 0.59 in (15 mm) inorganic LCD Panels x 3
 Scanning Frequency Auto: H Sync. 15 ~ 100 kHz, V Sync. 48 ~ 85 Hz
 Pixel Clock up-to 150 MHz
 Lens Fixed Short Throw with Manual Focus
 Lens Specs Speed: f : 1.8; FL: 0.239 in (6.08 mm)
 Lens Ratios Throw:Width 0.46:1
 Image Diagonal 50 ~ 100 in (127 ~ 254 cm)
 Image Width 2.6 ~ 20 ft (0.79 ~ 6.1 m)
 Throw Distance 1.57 ~ 3.28 ft (0.48 ~ 1.0 m)
 Projector Elevation Adjustment (legs) up-to 10°
 Maximum Pitch up-to 30° Up or Down
 Anti Keystone Fixed Image Offset, Ratio (Top / Bottom) 7.25:1
 Vertical Keystone Correction Digital: up-to 15° Up or Down
 Image Orientation Normal, Reversed, Inverted
 Local Control / Power Management Full Function / Auto Shutdown
 Remote Control Wireless x 1
 RS-232 Control Dsub9 x 1
 LAN Port RJ45 x 1
 Computer Input in Pixels up-to 1600 x 1200 (4:3), 1920 x 1200 (16:10)
 Analog 4x3 Inputs UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
 Analog Wide Inputs WUXGA, WSXGA+, WXGA+, WXGA
 Digital 4x3 Inputs UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
 Digital Wide Inputs WUXGA, WSXGA+, WXGA+, WXGA
 Video Formats NTSC / PAL / SECAM
 Video Input Analog 480i/p, 576i/p
 Video Input Digital 480p, 575p, 720p, 1080i/p
 Image Signal Resizing Smart Scaling Technology

Image Signal Inputs
 Computer 1 Dsub15 x 1
 Computer 2 (switchable Monitor Out) Dsub15 x 1
 Digital Video (w / HDCP) HDMI x 1
 S-Video S-Video x 1
 Component Video RCA x 3
 Composite Video RCA x 1 (Shared with Component)
 Audio Signal Inputs
 Computer Audio MiniStereo x 1
 Video Audio RCA x 2 (L/R)
 Outputs
 Computer Monitor (Computer 2) Dsub15 x 1
 Audio Output Variable, Stereo: MiniStereo x 1
 Amplifier Mono: 7 Watt
 Speaker 1.4 in (3.7 cm) x 1 (Mono)
 Fan Noise as low as 34 dBA
 Cabinet Size (HxWxD) 4.9 x 15.4 x 12.9 in (13.7 x 39.1 x 32.7 cm)
 (excluding legs)
 Weight 8.8 lb (4.0 kg)
 Packaged Cabinet Size (HxWxD) 6.7 x 17.0 x 14.2 in (17.0 x 43.1 x 36.0 cm)
 Packaged Weight 9.48 lb (4.3 kg)
 Operating Temperature 41 ~ 95°F (5 ~ 35°C)
 Electrical Safety Compliance IEC / UL / cUL
 Electromagnetic Compatibility FCC Class B, CE Mark
 Power Requirements 100 ~ 240V AC, 50/60 Hz
 Power Consumption 0.5 W in Eco Standby mode, up-to 290 W
 Heat up-to 990 BTU/hr
 Security Facilities Kensington® Security Slot
 UPC 4571194677089
 User Maintenance Clean Filter, Replace Lamp
 Limited Warranty: to the original end-use customer only
 Projector *3 years / 6000 hours
 Lamp *1 year ownership / 500 hours use
 *(which ever occurs first)

EIKI® is a registered trademark of EIKI International, Inc. Kensington® is a registered trademark of ACCO Brands Corporation.



Includes a full complement of connections, including network control.



LC-WAU200 • WXGA projector.



Handy access to air filter.



Easy to change long-life lamp.

INCLUDED ACCESSORIES:

Quick Start Guide, Owner's Manual on CD-ROM, VGA Computer Input Cable (Dsub15 to Dsub15), 6.0 ft (1.8 m) Detachable Power Cord, Remote Control (with 2 AAA Batteries).

OPTIONAL ACCESSORIES:

Replacement Lamp, Ceiling Mount, Ceiling Post and Plate, Soft Carry Bag.

Specifications subject to change without notice. ©2014 EIKI International, Inc. Printed in the USA. 08/01/14

EIKI
 Projectors... and more!
 www.eiki.com

Distributor:
Techni-Lux
 www.techni-lux.com
 Phone: 407-857-8770
 Fax: 407-857-8771
 Email: sales@techni-lux.com

LC-HDT2000

15,000 ANSI Lumens • 2K • 3LCD+One

Theater Series Projector



(Shown with optional lens)

Key Features:

- ◆ 15,000 ANSI lumens bright with 90% uniformity and a 3000:1 contrast ratio.
- ◆ Native 2K resolution. Compatible with inputs up-to UXGA and WUXGA.
- ◆ Supports analog and digital video input in all color standards up-to 2K*.
- ◆ 3LCD+One imaging system delivers more sophisticated color.
- ◆ 10-bit color processing, for superior color reproduction.
- ◆ Supplied without lens. Range of power zoom and focus lenses available.
- ◆ Bi-directional Vertical & Horizontal power lens shift and keystone correction.
- ◆ Accepts composite, component, and S-Video in all major standards.
- ◆ DVI-D (with HDCP) and HDMI® inputs support digital computer and video.
- ◆ Built-in wired LAN connection for projector monitoring and control.
- ◆ Self-cleaning air filter reduces maintenance. Optional smoke filter.
- ◆ Picture-in-Picture, Picture-by-Picture, and Edge Blending functions.
- ◆ Mechanical shutter for true black screen. 2, 3, and 4 lamp operation.
- ◆ Four hot-swappable lamps. Half inch (1.2 cm) steel plate chassis.
- ◆ 3 year projector warranty!

Summary:

Setting a new standard in affordable High Definition projectors, the EIKI LC-HDT2000 delivers more than high brightness, color and contrast. Engineered from the ground up for large venue applications, it offers a host of innovative performance, configuration and utilization features.

* Note: 2K may display via the built-in DVI-D or HDMI inputs, however 2K is fully supported only via the optional Dual-Link SDI Input Module.

EIKI[®]
Projectors... and more!

LC-HDT2000 SPECIFICATIONS

Brightness	up-to 15,000 ANSI Lumens (with AH-22051 lens)	
Contrast Ratio	up-to 3000:1	
Illumination Uniformity (corner to center)	90%	
Resolution and Aspect Ratio	2K (2048x1080), approx. 17:9	
Color Reproduction	10-bit (1.07 billion colors)	
Projection Lamp	380 Watts NSHA x 4	
Estimated Lamp Life	up-to 3,000 Hours	
Imaging System	1.64 in (42 mm) Inorganic LCD Panels x 3 with proprietary Color Control Device	
Total Pixels	6,635,520 (2048x1080) x 3	
Scanning Frequency	Auto: H: 15-120 kHz; V: 48-120 Hz	
Pixel Clock	up-to 230 MHz	
Lens	Changeable - Does not come with Lens	
Image Diagonal	100 - 600 in (254 - 1,524 cm)	
Image Width	7.4 - 44.2 ft (2.2 - 13.5 m)	
Throw Distance	See specifications of selected lens	
Projector Elevation Adjustment (legs)	up-to 3° Up or Down	
Maximum Pitch	up-to 360°	
Vertical Lens Shift (% of image height)	up-to 50% Up or Down	
Horizontal Lens Shift (% of image width)	up-to 10% Left or Right	
Vertical Keystone Correction	Digital: up-to 30° Up or Down	
Horizontal Keystone Correction	Digital: up-to 30° Left or Right	
Image Orientation	Normal, Reversed, Inverted	
Local Control / Power Management	Full Function / Auto Shutdown	
Remote Projector Control	Wireless/Wired x 1	
Wired Remote Control Port	MiniStereo x 1	
RS232 Control Ports (In & Out)	Dsub9 x 2	
LAN Port	RJ45 x 1	
Service Port	USB-B x 1	
Computer Input in Pixels	up-to 1600x1200 (4:3), 1920x1200 (16:10)	
Analog 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC	
Analog Wide Inputs	WXGA+, WXGA	
Digital 4x3 Inputs	SXGA+, SXGA, XGA, SVGA, VGA	
Digital Wide Inputs	WUXGA, WSXGA+, WXGA+, WXGA	
Video Formats	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N	
Image Signal Resizing	Smart Scaling Technology	
Video Input Analog	480i/p, 575i/p, 720p, 1035i, 1080i	
Video Input Digital	480i/p, 575i/p, 720p, 1035i, 1080i/p, 2K*	
Image Signal Inputs:		
1a. Computer	Dsub15 x 1	
1b. DVI-D (with HDCP)	DVI-D x 1	
1c. HDMI 1.3 with (Deep Color)	HDMI x 1	
2a. Analog Video (RGBHV)	BNC x 5	
Component Video (Y, Pb/Cb, PrCr), 3BNC		
Composite Video, 1BNC		
2b. S-Video	S-Video x 1	
3. Unpopulated Module Bay		
4. Unpopulated Module Bay		
Fan Noise	as low as 48 dBA	
Cabinet Size (HxWxD)	13.7 x 25.6 x 32.1 in (34.9 x 65.0 x 81.5 cm)	
Weight	102.5 lb (46.5 kg)	
Packaged Size (HxWxD)	21.3 x 33.3 x 37.4 in (54.2 x 84.6 x 95.1 cm)	
Packaged Weight	125.7 lb (57.0 kg)	
Power Requirements	200-240V AC, 50/60 Hz	
Power Consumption	up-to 1,850 W	
Heat	up-to 7,100 BTU/hr	
Power Cord	approx. 10 ft (3 m) NEMA 6-20P, Detachable	
Electrical Safety Compliance	IEC, UL, cUL	
Electromagnetic Compatibility	FCC Class A, CE Mark	
Operating Temperature	41-104°F (5-40°C)	
Security Facilities	Steel Plate Chassis & Integrated Handles, More	
Air Filter	Self-Cleaning, Multi-Layer, up-to 13,500 Hours	
User Maintenance	Empty Dust Bin, Replace Filters, Change Lamps	
UPC	4571194674859	
Limited Warranty: to the original end-use customer only		
Projector	3 years	
Lamp	6 months ownership/ 500 hours use (which ever occurs first)	

*Note: 2K may display via the built-in DVI-D or HDMI inputs, however 2K is fully supported only via the optional Dual-Link SDI Input Module.

EIKI® is a registered trademark of Eiki International, Inc.
HDMI® is a registered trademark of HDMI Licensing LLC.

EIKI
Projectors... and more!

Specifications subject to change without notice.

©2012 Eiki International, Inc. Printed in the USA. 01/15/12

Vivid Colors with the 3LCD+One Imaging Engine
High Contrast from Durable Inorganic LCD Panels
Hot-Swappable Lamps, so The Show Can Go On

32.1" 25.6"
13.7"




LC-HDT2000
(Shown with optional lens)



Remote control.



Broad selection of lenses.




3LCD+One Engine.



Built-in complement of professional inputs, and room for more. Choose from SD/HD-SDI, Dual-Link SDI, VGA/DVI and 5BNC/S-Video modules.



Air filter lasts up-to 13,500 hours.



INCLUDED ACCESSORIES:

Quick Start Guide, Owner's Manual on CD-ROM, Network Software on CD-ROM, Color Management Software on CD-ROM, Power Cord, Power Cord Clamp, Lens Attachment, Lens Light Block Sheets x 3, Lens Spacers x 3, Lens Safety Clamps x 2, VGA Computer Input Cable (Dsub15 to Dsub15), Wireless/Wired Remote Control (with 2 AAA Batteries), Wired Remote Cable (MiniStereo-MiniStereo).

OPTIONAL ACCESSORIES:

Replacement Lamps, Wideangle, Midrange and Telephoto Lenses, Additional DVI-D & Dsub15 Input Module, Additional 5BNC & S-Video Input Module, HD/SD-SDI Input Module, Dual-Link SDI Input Module, Replacement Air Filter Material Kit, Smoke Resistant Filter System, Replacement Smoke Resistant Filter Material, ATA-Style Shipping Case with Wheels and Telescoping Handle, Ceiling Mount, Ceiling Post & Plate.

Distributor:

Techni-Lux
www.techni-lux.com

Phone: 407-857-8770

Fax: 407-857-8771

Email: sales@techni-lux.com

LC-HDT1000

10,000 ANSI Lumens • 2K • 3LCD+One

Theater Series Projector



(Shown with optional lens)

Key Features:

- ◆ 10,000 ANSI Lumens bright, with 90% uniformity and a 3000:1 contrast ratio.
- ◆ Native 2K resolution. Compatible with inputs up-to UXGA and WUXGA.
- ◆ Supports analog and digital video input in all color standards up-to 2K*.
- ◆ 3LCD+One imaging system delivers more sophisticated color.
- ◆ 10-bit color processing, for superior color reproduction.
- ◆ Supplied without lens. Range of power zoom and focus lenses available.
- ◆ Bi-directional vertical & horizontal power lens shift and keystone correction.
- ◆ Accepts composite, component, and S-Video in all major standards.
- ◆ DVI-D (with HDCP) and HDMI® inputs support digital computer and video.
- ◆ Built-in wired LAN connection for projector monitoring and control.
- ◆ Self-advancing cartridge air filter reduces maintenance.
- ◆ Picture-in-Picture, Picture-by-Picture, and Edge Blending functions.
- ◆ Mechanical shutter for true black screen in "No Show" mode.
- ◆ Optional Dual-Link SDI Input Module supports 2K input.
- ◆ 3 year projector warranty!

Summary:

The EIKI LC-HDT1000 breaks the High Definition brightness barrier. Here's auditorium brightness in 2K HD, without the need for 240V AC. Sophisticated color reproduction and a stunning contrast ratio combine with lens and input versatility to make this a remarkable transportable.

* Note: 2K may display via the built-in DVI-D or HDMI inputs, however 2K is fully supported only via the optional Dual-Link SDI Input Module.

EIKI[®]
Projectors... and more!

LC-HDT1000 SPECIFICATIONS

Brightness	up-to 10,000 ANSI Lumens (with AH-22051 lens)
Contrast Ratio	up-to 3000:1
Illumination Uniformity (corner to center)	90%
Resolution and Aspect Ratio	2K (2048x1080), approx. 17:9
Color Reproduction	10-bit (1.07 billion colors)
Projection Lamp	380 Watts NSHA x 2
Estimated Lamp Life	up-to 3,000 Hours
Imaging System	1.64 in (42 mm) Inorganic LCD Panels x 3 with proprietary Color Control Device
Total Pixels	6,635,520 (2048x1080) x 3
Scanning Frequency	Auto: H: 15-120 kHz; V: 48-120 Hz
Pixel Clock	up-to 230 MHz
Lens	Changeable - Does not come with Lens
Image Diagonal	100 - 600 in (254 - 1,524 cm)
Image Width	7.4 - 44.2 ft (2.2 - 3.5 m)
Projector Elevation Adjustment (legs)	up-to 2.8° Up or Down
Maximum Pitch	up-to 360°
Vertical Lens Shift (% of image height)	up-to 50% Up or Down
Horizontal Lens Shift (% of image width)	up-to 10% Left or Right
Vertical Keystone Correction	Digital: up-to 30° Up or Down
Horizontal Keystone Correction	Digital: up-to 30° Left or Right
Image Orientation	Normal, Reversed, Inverted
Local Control / Power Management	Full Function / Auto Shutdown
Remote Projector Control	Wireless / Wired x 1
Wired Remote Control Port	MiniStereo x 1
RS232 Control Ports (In & Out)	Dsub9 x 2
LAN Port	RJ45 x 1
Service Port	USB-B x 1
Computer Input in Pixels	up-to 1600x1200 (4:3), 1920x1200 (16:10)
Analog 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
Analog Wide Inputs	WUXGA, WSXGA+, WXGA+, WXGA
Digital 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA
Digital Wide Inputs	WUXGA, WSXGA+, WXGA+, WXGA
Video Formats	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
Video Input Analog	480i/p, 575i/p, 720p, 1035i, 1080i/p
Video Input Digital	480p, 575p, 720p, 1035i, 1080i/p, 2K*
Image Signal Resizing	Smart Scaling Technology
Image Signal Inputs:	
1a. Analog Computer	Dsub15 x 1
1b. Digital Computer / Digital Video (with HDCP)	DVI-D x 1
1c. HDMI 1.3 (Deep Color)	HDMI® x 1
2a. Analog Video (RGBHV)	BNC x 5
Component Video (Y, Pb/Cb, Pr/Cr), 3BNC	
Composite Video, 1BNC	
2b. S-Video	S-Video x 1
3. Unpopulated Module Bay	
4. Unpopulated Module Bay	
Fan Noise	as low as 39 dBA
Cabinet Size (HxWxD)	9.6 x 21.2 x 29.8 in (24.5 x 53.9 x 75.7 cm) (excluding legs)
Weight	60.9 lb (27.6 kg)
Packaged Size (HxWxD)	21.3 x 33.3 x 37.4 in (54.2 x 84.6 x 95.1 cm)
Packaged Weight	83.8 lb (38.0 kg)
Power Requirements	100-240V AC, 50/60 Hz
Power Consumption	up-to 1,000 Watts
Heat	up-to 3,582 BTU/hr
Power Cord	approx. 10 ft (3 m), IEC Type C13, Detachable
Electrical Safety Compliance	IEC, UL, cUL
Electromagnetic Compatibility	FCC Class A, CE Mark
Security Facilities	Kensington® Security Slot, Integrated Handle
Operating Temperature	41-104°F (5-40°C)
Air Filter	Cartridge Filter, up-to 11,000 Hours
User Maintenance	Replace Cartridge Air Filter, Change Lamps
UPC	4571194674736
Limited Warranty: to the original end-use customer only	
Projector	3 Years / 6000 hours (whichever occurs first)
Lamp	6 months ownership/500 Hrs Use (whichever occurs first)


*Note: 2K may display via the built-in DVI-D or HDMI inputs, however 2K is fully supported only via the optional Dual-Link SDI Input Module.

EIKI® is a registered trademark of Eiki International, Inc. HDMI® is a registered trademark of HDMI Licensing LLC. Kensington is a registered trademark of ACCO Brands Corporation.

EIKI
Projectors... and more!

Specifications subject to change without notice.
©2011 Eiki International, Inc. Printed in the USA. 02/09/11

Remarkably Bright Full HD - 1080p on a 15A Circuit
Vivid Colors with the 3LCD+One Imaging Engine
High Contrast from Durable Inorganic LCD Panels

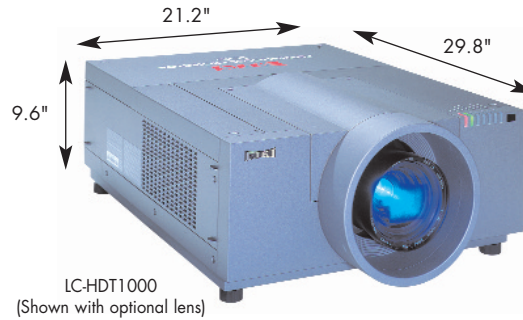


LC-HDT1000
(Shown with optional lens)



Remote control.




Broad selection of lenses.




3LCD+One Engine.



Includes a full complement of professional inputs, with room for more. Select from SD/HD-SDI, Dual-Link SDI, or more VGA/DVI.

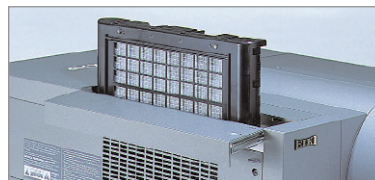

Air filter lasts up-to 11,000 hours.

 Lamp Contains Mercury. Do not put in trash. Dispose-of-as Hazardous Waste, according to the laws in your jurisdiction.



INCLUDED ACCESSORIES:

Quick Start Guide, Owner's Manual on CD-ROM, Network Software on CD-ROM, Color Management Software on CD-ROM, Power Cord, Lens Attachment, Lens Spacer x 3, Lens Light Block Plates x 3, Lens Mounting Clamp, VGA Computer Input Cable (Dsub15 to Dsub15), Wireless/Wired Remote Control (with 2 AAA Batteries), Wired Remote Cable (MiniStereo-MiniStereo).

OPTIONAL ACCESSORIES:

Replacement Lamps, Wideangle, Midrange and Telephoto Lenses, Replacement Cartridge Air Filter, Additional DVI-D & Dsub15 Input Module, Additional 5BNC & S-Video Input Module, HD/SD-SDI Input Module, Dual-Link SDI Input Module, ATA-Style Shipping Case with Wheels and Telescoping Handle, Ceiling Mount, Ceiling Post & Plate.

Distributor:

Techni-Lux
www.techni-lux.com

Phone: 407-857-8770

Fax: 407-857-8771

Email: sales@techni-lux.com

7,000 ANSI Lumens • 1080p • 3LCD+One

LC-HDT700

Boardroom Series Projector



Get the rich color imaging of 3LCD+One technology in an installation projector with unparalleled brightness and compatibility.

Key Features:

- △ 7,000 ANSI lumens, 90% uniformity and 2700:1 contrast ratio.
- △ Native 1080p resolution. Compatible with inputs up-to UXGA and WUXGA.
- △ Supports analog and digital video input in all color standards up-to 1080p.
- △ 3LCD+One imaging system delivers more sophisticated color.
- △ 10-bit color processing, for superior color reproduction.
- △ A wide range of optional lenses is available. Projects images up-to 600" diagonal.
- △ Vertical and horizontal power lens shift. Built-in RJ45 for Network monitor & control.
- △ Horiz. & Vert. Digital Keystone Correction. Corner Keystone Correction.
- △ Edge Blending & Color Matching. Picture in Picture & Picture by Picture.
- △ Accepts composite, component, and S-Video in all major standards.
- △ Optional network module for projector monitoring and control.
- △ Self-advancing cartridge air filter provides up-to 10,000 hours use.
- △ Wireless/wired remote with mouse control. 27.5% - 490% digital zoom.
- △ Variable power management option. Optional local or remote keylock.
- △ Compatible with Crestron RoomView™ & AMX Device Discovery Technology.
- △ Custom warm-up screen option. Built-in color auto picture control.
- △ 3 year projector warranty.



EIKI
Projectors... and more!

LC-HDT700 SPECIFICATIONS:

Brightness up-to 7,000 ANSI Lumens (with standard AH-23082 lens)
 Contrast Ratio up-to 2700 : 1
 Illumination Uniformity (corner to center) 90%
 Resolution and Aspect Ratio 1920 x 1080 (16:9)
 Color Reproduction 10-bit (1.07 billion colors)
 Projection Lamp 380 Watts NSHA
 Estimated Lamp Life up-to 3,000 Hours
 Imaging System 1.2 in (30 mm) Inorganic LCD Panels x 3
 with proprietary Color Control Device

Total Pixels 2,073,600 ((1920 x 1080)x3)
 Scanning Frequency Auto: H: 15 ~ 120 kHz; V: 48 ~ 100 Hz
 Pixel Clock up-to 162 MHz
 Lens Changeable - Power Zoom and Focus
 Image Diagonal 40 ~ 600 in (101.6 ~ 1,524 cm)
 Image Width 2.9 ~ 44 ft (0.88 ~ 13.4 m)
 Throw Distance See specifications of selected lens
 Projector Elevation Adjustment (legs) up-to 6.5° Up
 Maximum Pitch up-to 360°
 Vertical Lens Shift (% of image height) up-to 50% Up or Down
 Horizontal Lens Shift (% of image width) up-to 10% Left or Right
 Vertical Keystone Correction Digital: up-to 40° Up or Down
 Horizontal Keystone Correction Digital: up-to 20° Left or Right
 Image Orientation Normal, Reversed, Inverted
 LAN Port RJ45 x 1
 Local Control / Power Management Full Function / Auto Shutdown
 RS232 Control Port Dsub9 x 1
 Remote Projector Control Wireless / Wired x 1
 Wired Remote Control Port MiniStereo x 1
 Mouse Port USB-B x 1
 Computer Input in Pixels up-to 1600 x 1200 (4:3), 1920 x 1200 (16:10)
 Analog 4x3 Inputs UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
 Analog Wide Inputs WUXGA, WSXGA+, WXGA+, WXGA
 Digital 4x3 Inputs SXGA, XGA, SVGA, VGA
 Digital Wide Inputs WXGA, WXGA+
 Video Formats NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
 Image Signal Resizing Smart Scaling Technology


Video: Resolutions Supported
 SDTV (Composite, S-Video, Component) 480i/p, 575i/p
 HDTV 720p, 1080i/p, 1080 p/30/25/24

Image Signal Inputs
 1. a. Computer: Analog RGB Dsub 15 x 1
 b. Computer: Digital RGB DVI-D x 1
 or Video: Digital Video w/HDCP
 c. Video: Digital Video w/HDCP HDMI x 1 (Ver.1.3 w/Deep color)
 2. Computer (RGBHV) BNC x 5
 Component Video, 3BNC
 Composite Video, 1BNC
 3. a. Component Video (Y, Pb/Cb, Pr/Cr) RCA x 3
 Composite Video, 1RCA
 b. S-Video S-Video x 1

Outputs
 Computer Monitor (by switchable input port) Dsub15 x 1
 Fan Noise as low as 38 dBA
 Cabinet Size (HxWxD) 7.4 x 14.6 x 17.3 in (18.7 x 37.0 x 44.0 cm)
 (excluding lens)
 Weight 25.6 lb (11.6 kg)
 Packaged Size (HxWxD) 15.2 x 19.4 x 24.8 in (38.8 x 49.2 x 63 cm)
 Packaged Weight 35.5 lb (16.1 kg)
 Power Requirements 100 ~ 240V AC, 50/60 Hz
 Power Consumption up-to 520 W
 Heat up-to 1774 BTU/hr
 Power Cord 10' (3M) Type C13, Detachable
 Electrical Safety Compliance UL, cUL, IEC
 Electromagnetic Compatibility FCC Class B, CE Mark
 Security Facilities Kensington® Security Slot
 Operating Temperature 41 ~ 104°F (5 ~ 40°C)
 User Maintenance Replace Cartridge Air Filter, Change Lamp
 UPC 4571194675238
 Limited Warranty: to the original end-use customer only
 Projector 3 years / 6000 hours (which ever occurs first)
 Lamp 6 months ownership / 500 hrs use (which ever occurs first)

EIKI® is a registered trademark of Eiki International, Inc. Kensington® is a registered trademark of ACCO Brands Corporation.

Vivid Colors with 3LCD+One Imaging.
Inorganic Panels Optimized for Extended Use.
Self-Advancing Cartridge Air Filter Reduces Maintenance.

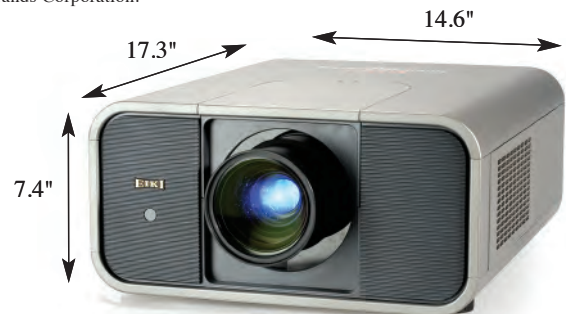

LC-HDT700 • 1080p • 3LCD+One projector



Includes a full complement of connections, including network control.



Handy access to air filter.

INCLUDED ACCESSORIES:

Owner's Manual on CD-ROM. Quick Start Guide. Power Cord. VGA Computer Input Cable (Dsub15 to Dsub15). Wireless/Wired Remote with Mouse Control (with 2 AAA Batteries). USB Cable for Computer Mouse Control. Wired Remote Cable (MiniStereo-MiniStereo). Lens Mount Attachment. Lens Spacer. Lens Light Block Sheet.

OPTIONAL ACCESSORIES:

Replacement Lamp. Soft Carry Bag with Wheels and Telescoping Handle. ATA-Style Shipping Case with Wheels and Telescoping Handle. Wideangle. Midrange and Telephoto Lenses. Ceiling Mount. Ceiling Post & Plate. PjNET Network Interface. Replacement Air Filter Cartridge.

Specifications subject to change without notice. ©2011 Eiki International, Inc. Printed in the USA. 11/15/11

EIKI
 Projectors... and more!
 www.eiki.com

Distributor:


Techni-Lux
 www.techni-lux.com

Phone: 407-857-8770
 Fax: 407-857-8771
 Email: sales@techni-lux.com

5,500 ANSI Lumens • XGA (1024x768) • 4:3 • DLP®

EIKI-X5500

"Meeting Room" Series Projector

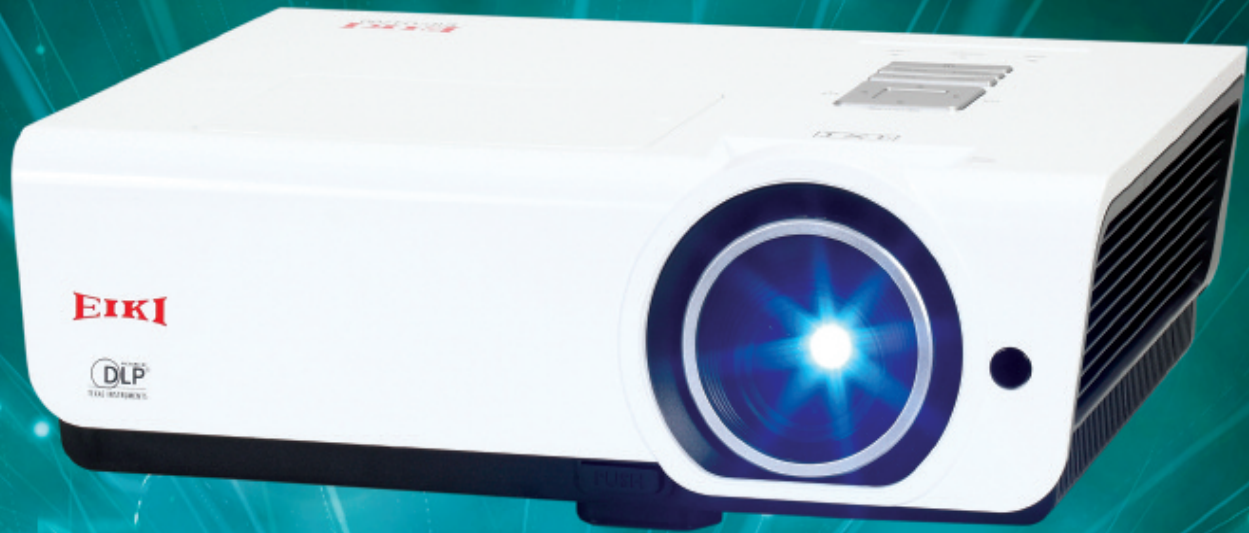

24/7 Operability*1
Excellent choice for Classrooms or Conference Rooms!



Key Features:

- △ 5,500 ANSI lumens bright with 80% uniformity and a 2200:1 contrast ratio.
- △ HDMI and Display Port Digital connectivity with HDCP compliance.
- △ Native XGA resolution. Compatible with inputs up-to UXGA and WSXGA+.
- △ Supports analog and digital video input in all color standards up-to 1080p.
- △ Compatible with Crestron RoomView™ & AMX Device Discovery Technology.
- △ Vari-focal mid-range (1.2:1) manual zoom and focus lens. Fixed image offset.
- △ Accepts composite, component, and S-Video in all major standards.
- △ Displays both 4:3 and 16:9 aspect ratios. Supports most HDTV resolutions.
- △ Built-in 3 Watt sound system. Closed Caption decoding (NTSC).
- △ Wired network monitoring and control. Digital zoom: 50% to 400%.
- △ 3D Function (glasses not included).
- △ Top-accessed lamp for ease of maintenance.
- △ Custom warm-up screen. Auto input selection.
- △ Security bar. Kensington® MicroSaver® security slot. PIN lock.
- △ 3 year projector warranty.

*1 Replace lamp as necessary.




EIKI®
Projectors... and more!

EIP-X5500 Specifications:



Brightness	5,500 ANSI Lumens
Contrast Ratio	2,200:1
Illumination Uniformity	80%
Resolution and Aspect Ratio	XGA (1024 x 768), 4:3
Color Reproduction	1.07 billion colors
Projection Lamp	310 Watts UHP
Estimated Lamp Life	up-to 4,000 hours
Total Pixels	786,432 (1024 x 768) x 1
Imaging System	0.7" DMD™ DLP® chip x 1
Scanning Frequency	Auto: H Sync. 31 ~92 kHz, V Sync. 48 ~ 120 Hz
Pixel Clock	up-to 150 MHz
Lens	Attached (Vari-focal) Manual Zoom and Focus
Lens Specs	Speed: f : 2.6 ~ 2.81; FL: 1.023 ~ 1.173 in (26.0 ~ 29.8 mm)
Lens Ratios	Zoom Max:Min: 1.15:1; Throw:Width 1.8 ~ 2.1:1
Image Diagonal	24 ~ 300 in (60.9 ~ 762 cm)
Image Width	1.57 ~ 20 ft (0.48 ~ 6.1 m)
Throw Distance	4.92 ~ 32.8 ft (1.5 ~ 10.0 m)
Projector Elevation Adjustment (legs)	up-to 10°
Maximum Pitch	up-to 15° Up or Down
Fixed Image Offset	112.3% of Image Height up
Vertical Keystone Correction	Digital: up-to 30° Up or Down
Image Orientation	Normal, Reversed, Inverted
Local Control / Power Management	Full Function / Auto Shutdown
Remote Control / Service	Wireless (with laser pointer) x 1 / USB-B x 1
RS-232 Control	Dsub9 x 1
LAN Port	RJ45 x 1
Computer Input in Pixels	up-to 1600 x 1200 (4:3), 1680 x 1050 (16:10)
Analog 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
Analog Wide Inputs	WSXGA+, WXGA+, WXGA
Digital 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
Digital Wide Inputs	WSXGA+, WXGA+, WXGA
Video Formats	NTSC / PAL / SECAM
Video Input Analog	480i/p, 575i/p
Video Input Digital	480p, 575p, 720p, 1080i/p
Image Signal Resizing	Smart Scaling Technology

Image Signal Inputs	
Computer 1 / Component (w/optional adapter)	Dsub15 x 1
Computer 2 / Component (w/optional adapter)	Dsub15 x 1
Digital Video (w/ HDCP)	HDMI x 2
Digital Video (w/ HDCP)	DisplayPort x 1
S-Video	S-Video x 1
Composite Video	RCA x 1
Audio Signal Inputs	
Computer Audio	MiniStereo x 1
Video Audio	RCA x 2 (L/R)
Outputs	
Computer Monitor (Analog)	Dsub15 x 1
Audio Output	Variable, Stereo: MiniStereo x 1
Amplifier	Mono: 3 Watt
Speaker	1.4 in (3.7 cm) x 1 (Mono)
Screen Trigger	DC12V x 1
3D	3D Sync x 1
Fan Noise	as low as 35 dBA
Cabinet Size (HxWxD)	4.75 x 13.3 x 10.5 in (12.0 x 33.8 x 26.7 cm) (excluding legs)
Weight	8.4 lb (3.8 kg)
Packaged Cabinet Size (HxWxD)	7.7 x 17.9 x 19.6 in (19.5 x 45.4 x 49.7 cm)
Packaged Weight	12.8 lb (5.8 kg)
Operating Temperature	41 ~ 95°F (5 ~ 35°C)
Electrical Safety Compliance	IEC / UL / cUL
Electromagnetic Compatibility	FCC Class B, CE Mark
Power Requirements	100 ~ 240V AC, 50/60 Hz
Power Consumption	0.5 W in Eco Standby mode, up-to 370W
Heat	up-to 1,263 BTU/hr
Security Facilities	Security Bar, Kensington® Security Slot
UPC	4571194676600
User Maintenance	Replace Lamp
Limited Warranty: to the original end-use customer only	
Projector	*3 years / 6000 hours
Lamp	*1 year ownership / 500 hours use (which ever occurs first)

EIKI® is a registered trademark of Eiki International, Inc. Kensington® is a registered trademark of ACCO Brands Corporation. DLP® and DMD™ are trademarks of registered trademarks of Texas Instruments.

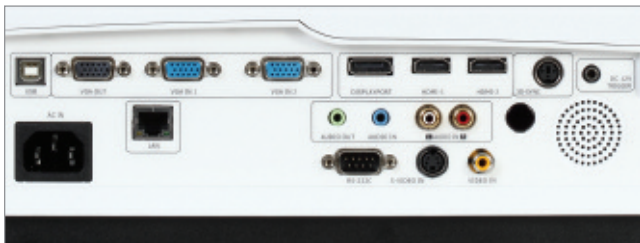


Includes a full complement of connections, including network control.

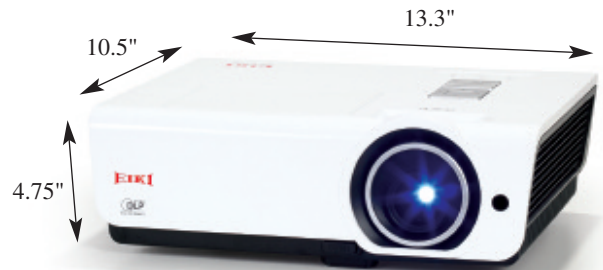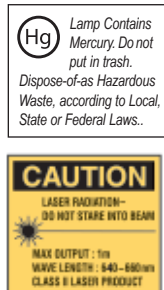

EIP-X5500 • XGA • DLP® projector.



Connect and project.

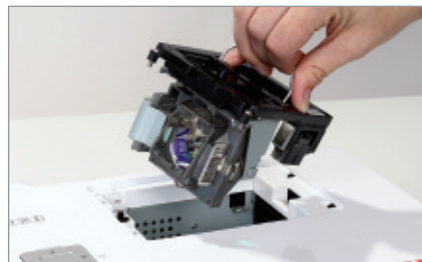

Easy to change long-life lamp.

INCLUDED ACCESSORIES:

Quick Start Guide, Owner's Manual on CD-ROM, VGA Computer Input Cable (Dsub15 to Dsub15), 6.0 ft (1.8 m) Detachable Power Cord, Remote Control (with 2 AAA Batteries), Soft Carry Bag.

OPTIONAL ACCESSORIES:

Replacement Lamp, Component Video Input Cable (Dsub15 to 3RCA), Ceiling Mount, Ceiling Post and Plate.

EIKI
Projectors... and more!
www.eiki.com

Distributor:

Techni-Lux
www.techni-lux.com

Phone: 407-857-8770
Fax: 407-857-8771
Email: sales@techni-lux.com

3,100 ANSI Lumens • WXGA • DLP®

EIP-WSS3100

"Ultra Short Throw" Series Projector
Optional Interactive Features



Optional Interactive Features.



Key Features:

- △ 3,100 ANSI lumens bright with 80% uniformity and a 8000:1 contrast ratio.
- △ Native WXGA (16:10) resolution. Compatible with inputs up-to UXGA and WSXGA+.
- △ HDMI Digital connectivity with HDCP compliance. 3D Ready.
- △ Supports analog and digital video input in all color standards up-to 1080p.
- △ Compatible with Crestron RoomView™ & AMX Device Discovery Technology.
- △ Interactive Features Optional. 1-chip DLP™ technology.
- △ Ultra Short Throw 0.35:1 manual focus lens.
- △ Accepts composite, component, and S-Video in all major standards.
- △ Displays both 4:3 and 16:9 aspect ratios. Supports most HDTV resolutions
- △ Built-in 10 Watt sound system. Closed Caption decoding (NTSC).
- △ Wired network monitoring and control. Digital zoom: 2X.
- △ Side-accessed lamp for ease of maintenance.
- △ Color board modes. Custom warm-up screen. Auto input selection.
- △ Security bar. Kensington® MicroSaver® security slot. PIN lock.
- △ 3 year projector warranty.



EIKI
Projectors... and more!

EIP-WSS3100 SPECIFICATIONS:

Brightness up-to 3,100 ANSI Lumens
 Contrast Ratio up-to 8,000:1
 Illumination Uniformity (corner to center) 80%
 Resolution and Aspect Ratio WXGA (1280x800), 16:10
 Color Reproduction 10-bit (1.07 billion colors)
 Projection Lamp 280 Watts UHP
 Estimated Lamp Life up-to 4,000 Hours
 Total Pixels 1,024,000 (1280 x 800) x 1
 Imaging System 0.65" DMD™ DLP™ chip x 1
 Color Wheel 6 segments x 1
 Scanning Frequency Auto: H: 30 ~ 100 kHz; V: 50 ~ 120 Hz
 Pixel Clock up-to 170 MHz
 Lens Attached ~ Manual Focus Lens
 Lens Specs Speed: f: 2.6; FL: 0.193 in (4.90 mm)
 Lens Ratios Throw:Width 0.35:1
 Image Diagonal 70 ~ 100 in (178 ~ 254 cm)
 ImageWidth 4.9 ~ 7.0 ft (1.5 ~ 2.1m)
 Throw Distance 23.5 ~ 28.8 in (597 ~ 731 mm)
 Projector Elevation Adjustment (legs) up-to 5.9° Up
 Vertical Keystone Correction Digital: up-to 15° Up or Down
 Image Orientation Normal, Reversed, Inverted
 Local Control / Power Management Full Function / Auto Shutdown
 Remote Control Wireless x 1
 RS232 Control Port Dsub9 x 1
 LAN Port RJ45 x 1
 Computer Input in Pixels up-to 1600x1200 (4:3), 1680x1050 (16:10)
 Analog 4x3 Inputs UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
 Analog Wide Inputs WSXGA+, WXGA+, WXGA
 Digital 4x3 Inputs UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
 Digital Wide Inputs WSXGA+, WXGA+, WXGA
 Video Formats NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
 Video Input Analog 480i/p, 575i/p
 Video Input Digital 480p, 575p, 720p, 1080i/p
 Image Signal Resizing Smart Scaling Technology

Image Signal Inputs
 Computer 1 / Component (w/optional adapter) Dsub15 x 1
 Computer 2 / Component (w/optional adapter) Dsub15 x 1
 HDMI / Digital PC / Digital Video (w / HDCP) HDMI x 1
 S-Video S-Video x 1
 Composite Video RCA x 1

Interactive Features / Firmware Upgrade Mini-USB Type B x 1

Audio Signal Inputs
 Computer Audio MiniStereo x 2
 Video Audio RCA (L/R) x 2
 Microphone MiniStereo x 1

Outputs
 Computer Monitor Dsub15 x 1
 Audio Output Variable, Stereo: MiniStereo x 1
 Screen Trigger DC12V x 1

Amplifier Mono: 10 Watt
 Speaker 1.4 in (3.7 cm) x 1 (Mono)
 Fan Noise as low as 33 dBA
 Cabinet Size (HxWxD) 9.1 x 14.1 x 14.5 in (23.1 x 35.7 x 36.7 cm)
 (including mirror ~ excluding legs)


Weight 17.5 lb (8.0 kg)
 Packaged Cabinet Size (HxWxD) 13.9 x 18.3 x 17.9 in (35.3 x 46.4 x 45.4 cm)
 Packaged Weight 22.0 lb (10 kg)
 Operating Temperature 41 ~ 95°F (5 ~ 35°C)
 Electrical Safety Compliance IEC / UL / cUL
 Electromagnetic Compatibility FCC Class B, CE Mark
 Power Requirements 100 ~ 240V AC, 50/60 Hz
 Power Consumption 0.5 W in Eco Standby mode, up-to 350W
 Heat up-to 1,195 BTU/hr
 Power Cord 6.0 ft. (1.8 m) Detachable
 Security Facilities Kensington® Security Slot, Security Bar
 UPC 4571194676389
 User Maintenance Clean Air Filter, Change Lamp
Limited Warranty: to the original end-use customer only
 Projector 3 years
 Lamp 1 year ownership / 500 hrs use (which ever occurs first)

EIKI® is a registered trademark of Eiki International, Inc. Kensington® is a registered trademark of ACCO Brands Corporation. DLP® and DMD™ are trademarks of registered trademarks of Texas Instruments.



Includes a full complement of connections, including network control.

Hg Lamp Contains Mercury. Do not put in trash. Dispose-of-as Hazardous Waste, according to Local, State or Federal Laws.

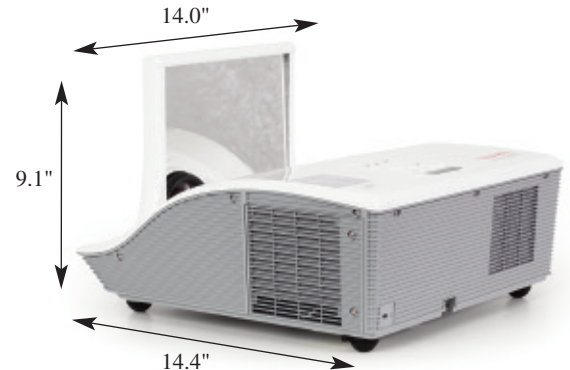

EIP-WSS3100 • WXGA projector



Connect and project.



Easy to change long-life lamp.



Optional Interactive Features.

INCLUDED ACCESSORIES:

Quick Start Guide, Owner's Manual on CD-ROM, VGA Computer Input Cable (Dsub15 to Dsub15), 6.0 ft (1.8 m) Detachable Power Cord, Remote Control (with Lithium Battery CR2025)

OPTIONAL ACCESSORIES:

Replacement Lamp, Component Video Input Cable (Dsub15 to 3RCA), Ceiling Mount, Ceiling Post and Plate, IR Pen and 2 AAA Batteries, IR Pointer and 2 AAA Batteries, IR Camera, Interactive Software on CD, USB Cable.

Specifications subject to change without notice. ©2013 Eiki International, Inc. Printed in the USA. 05/01/13

EIKI
 Projectors... and more!
 www.eiki.com

Distributor:

 Techni-Lux
 www.techni-lux.com
 Phone: 407-857-8770
 Fax: 407-857-8771
 Email: sales@techni-lux.com

3,100 ANSI Lumens • WXGA • DLP®

EIP-WSS3100

"Ultra Short Throw" Series Projector
Optional Interactive Features



Optional Interactive Features.



Key Features:

- △ 3,100 ANSI lumens bright with 80% uniformity and a 8000:1 contrast ratio.
- △ Native WXGA (16:10) resolution. Compatible with inputs up-to UXGA and WSXGA+.
- △ HDMI Digital connectivity with HDCP compliance. 3D Ready.
- △ Supports analog and digital video input in all color standards up-to 1080p.
- △ Compatible with Crestron RoomView™ & AMX Device Discovery Technology.
- △ Interactive Features Optional. 1-chip DLP™ technology.
- △ Ultra Short Throw 0.35:1 manual focus lens.
- △ Accepts composite, component, and S-Video in all major standards.
- △ Displays both 4:3 and 16:9 aspect ratios. Supports most HDTV resolutions
- △ Built-in 10 Watt sound system. Closed Caption decoding (NTSC).
- △ Wired network monitoring and control. Digital zoom: 2X.
- △ Side-accessed lamp for ease of maintenance.
- △ Color board modes. Custom warm-up screen. Auto input selection.
- △ Security bar. Kensington® MicroSaver® security slot. PIN lock.
- △ 3 year projector warranty.



EIKI
Projectors... and more!

EIP-WSS3100 SPECIFICATIONS:



Brightness up-to 3,100 ANSI Lumens
 Contrast Ratio up-to 8,000:1
 Illumination Uniformity (corner to center) 80%
 Resolution and Aspect Ratio WXGA (1280x800), 16:10
 Color Reproduction 10-bit (1.07 billion colors)
 Projection Lamp 280 Watts UHP
 Estimated Lamp Life up-to 4,000 Hours
 Total Pixels 1,024,000 (1280 x 800) x 1
 Imaging System 0.65" DMD™ DLP™ chip x 1
 Color Wheel 6 segments x 1
 Scanning Frequency Auto: H: 30 ~ 100 kHz; V: 50 ~ 120 Hz
 Pixel Clock up-to 170 MHz
 Lens Attached ~ Manual Focus Lens
 Lens Specs Speed: f: 2.6; FL: 0.193 in (4.90 mm)
 Lens Ratios Throw:Width 0.35:1
 Image Diagonal 70 ~ 100 in (178 ~ 254 cm)
 ImageWidth 4.9 ~ 7.0 ft (1.5 ~ 2.1m)
 Throw Distance 23.5 ~ 28.8 in (597 ~ 731 mm)
 Projector Elevation Adjustment (legs) up-to 5.9° Up
 Vertical Keystone Correction Digital: up-to 15° Up or Down
 Image Orientation Normal, Reversed, Inverted
 Local Control / Power Management Full Function / Auto Shutdown
 Remote Control Wireless x 1
 RS232 Control Port Dsub9 x 1
 LAN Port RJ45 x 1
 Computer Input in Pixels up-to 1600x1200 (4:3), 1680x1050 (16:10)
 Analog 4x3 Inputs UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
 Analog Wide Inputs WSXGA+, WXGA+, WXGA
 Digital 4x3 Inputs UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
 Digital Wide Inputs WSXGA+, WXGA+, WXGA
 Video Formats NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
 Video Input Analog 480i/p, 575i/p
 Video Input Digital 480p, 575p, 720p, 1080i/p
 Image Signal Resizing Smart Scaling Technology

Image Signal Inputs
 Computer 1 / Component (w/optional adapter) Dsub15 x 1
 Computer 2 / Component (w/optional adapter) Dsub15 x 1
 HDMI / Digital PC / Digital Video (w / HDCP) HDMI x 1
 S-Video S-Video x 1
 Composite Video RCA x 1
 Interactive Features / Firmware Upgrade Mini-USB Type B x 1
 Audio Signal Inputs
 Computer Audio MiniStereo x 2
 Video Audio RCA (L/R) x 2
 Microphone MiniStereo x 1
 Outputs
 Computer Monitor Dsub15 x 1
 Audio Output Variable, Stereo: MiniStereo x 1
 Screen Trigger DC12V x 1
 Amplifier Mono: 10 Watt
 Speaker 1.4 in (3.7 cm) x 1 (Mono)
 Fan Noise as low as 33 dBA
 Cabinet Size (HxWxD) 9.1 x 14.1 x 14.5 in (23.1 x 35.7 x 36.7 cm)
 (including mirror ~ excluding legs)
 Weight 17.5 lb (8.0 kg)
 Packaged Cabinet Size (HxWxD) 13.9 x 18.3 x 17.9 in (35.3 x 46.4 x 45.4 cm)
 Packaged Weight 22.0 lb (10 kg)
 Operating Temperature 41 ~ 95°F (5 ~ 35°C)
 Heat up-to 1,195 BTU/hr
 Power Cord 6.0 ft. (1.8 m) Detachable
 Security Facilities Kensington® Security Slot, Security Bar
 UPC 4571194676389
 User Maintenance Clean Air Filter, Change Lamp
 Limited Warranty: to the original end-use customer only
 Projector 3 years
 Lamp 1 year ownership / 500 hrs use (which ever occurs first)

DLP® and DMD™ are trademarks of registered trademarks of Texas Instruments.



Includes a full complement of connections, including network control.

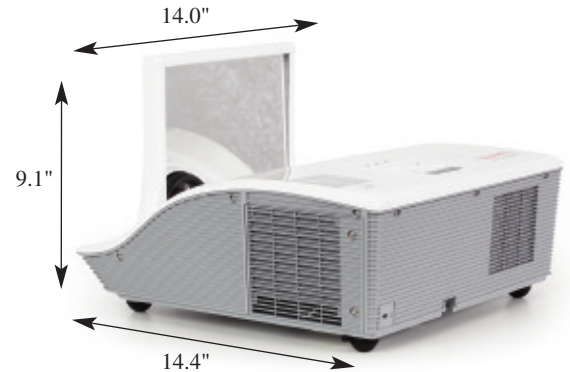

EIP-WSS3100 • WXGA projector



Connect and project.



Easy to change long-life lamp.



Optional Interactive Features.

INCLUDED ACCESSORIES:

Quick Start Guide, Owner's Manual on CD-ROM, VGA Computer Input Cable (Dsub15 to Dsub15), 6.0 ft (1.8 m) Detachable Power Cord, Remote Control (with Lithium Battery CR2025)

OPTIONAL ACCESSORIES:

Replacement Lamp, Component Video Input Cable (Dsub15 to 3RCA), Ceiling Mount, Ceiling Post and Plate, IR Pen and 2 AAA Batteries, IR Pointer and 2 AAA Batteries, IR Camera, Interactive Software on CD, USB Cable.

Distributor:



Phone: 407-857-8770

Fax: 407-857-8771

Email: sales@techni-lux.com



Projectors... and more!

www.eiki.com